


Ecophon Hygiene Performance™ Plus A

Ecophon Hygiene Performance™ Plus A has an exposed grid with fully sealed robust Hygiene Performance™ Plus A tiles and suitable for humid areas. The ceiling withstands advanced cleaning, such as steam and high/low pressure washing on a regular basis. The surface is resistant to common detergents and disinfectants.




Oatly, Landskrona, Sweden


SYSTEM RANGE



| Size, mm | 600x600 | 600x600 | 1200x600 | 1200x600 |
|-----------------|---------|---------|----------|----------|
| T24 | • | • | • | • |
| Thickness (THK) | 20 | 40 | 20 | 40 |
| Inst. Diagr. | M466 | M466 | M466 | M466 |



Hygiene Performance Plus A tile



Hygiene Performance Plus A C3 section with Connect Hygiene Clip 20



Hygiene Performance Plus A system




Acoustic

Sound Absorption:

Test results according to EN ISO 354. Classification according to EN ISO 11654.

α_p , Practical sound absorption coefficient

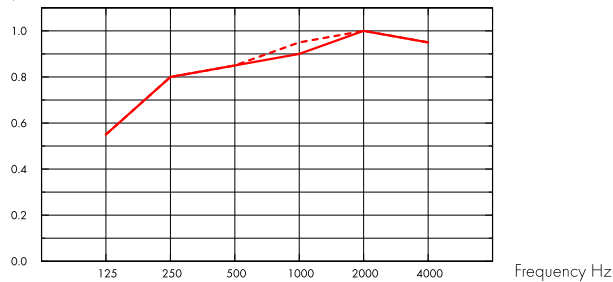

- Hygiene Performance Plus A 20 mm, 200 mm o.d.s.
- - - Hygiene Performance Plus A 40 mm, 200 mm o.d.s.

| THK mm | o.d.s. mm | α_p , Practical sound absorption coefficient | | | | | | α_w | Sound absorption class |
|--------|-----------|---|--------|--------|---------|---------|---------|------------|------------------------|
| | | 125 Hz | 250 Hz | 500 Hz | 1000 Hz | 2000 Hz | 4000 Hz | | |
| 20 | 200 | 0.55 | 0.80 | 0.85 | 0.90 | 1.00 | 0.95 | 0.90 | A |
| 40 | 200 | 0.55 | 0.80 | 0.85 | 0.95 | 1.00 | 0.95 | 0.95 | A |



Indoor Air Quality

Certificate / Label

Eurofins Indoor Air Comfort®

IAC

French VOC

A

Finnish M1

•



Environmental Footprint

Kg CO₂ equiv/m²: 4,2 From family EPD in conformity with ISO 14025 / EN 15804



Circularity

Minimum post-consumer recycled content

44%

Recyclability

Fully recyclable



Fire safety

| Country | Standard | Class |
|---------|------------|----------|
| Europe | EN 13501-1 | A2-s1,d0 |

The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182.



Humidity Resistance

Class C, relative humidity 95% and 30°C, according to EN 13964:2014



Visual appearance

White 500, nearest NCS colour sample S 0500-N, 84% light reflectance.



Cleanability

Daily dusting and vacuum cleaning. Weekly wet wiping.



Advanced Cleanability

High and low pressure cleaning with water and steam cleaning. Withstand use of hydrogen peroxide vapor.



Surface Endurance

Product tested according to ISO 11998, and withstand 200 cycles.



Chemical resistance/Disinfection

| Chemical | Active Substance | Concentration |
|------------------|--|---------------|
| Actichlor plus | NaDCC (Sodium Dichloroisocyanurate) | 1% |
| LifeClean | Chlorine dioxide | Undiluted |
| Etanol | Etanol | 70% |
| Chlorine | Sodium Hypochlorite solution | 2,5% |
| Virkon S | Sulfamic acid | 1% |
| Isopropanol | Isopropyl Alcohol | 70% |
| Oxivir Excel | Hydrogen peroxide | 0,5% |
| Sumabac D10 | Quaternary ammonium compound, Sodium carbonate | 1% |
| Suredis VT1 | n-(3-aminopropyl)-n-dodecylpropan-1,3-diamin | 1% |
| Enduro Chlor VE5 | Potassium hydroxide | 1,5% |
| Acipusfoam VF59 | Nitric Acid | 5% |

Tested according to ISO 11998 and withstand the following chemicals or disinfectants.



Mould and Bacterial Resistance

| Standard/Method | |
|-----------------|---|
| ISO 846 A | 0 |
| ISO 846 C | 0 |



Clean Room

| Standard | Standard/Method | Class |
|-------------|-------------------------------|-----------|
| ISO 14644 | Particle cleanliness class | ISO 4 |
| NF S 90-351 | Microbiological class | M1/area 4 |
| NF S 90-351 | Particle elimination kinetics | CP(0,5) 5 |



Accessibility

The tiles are demountable. Minimum demounting depth according to installation diagram. The tiles are secured using clips to allow for effective cleaning. The clips are easily removable from above the ceiling. An easy-to-open Connect Inspection hatch is available to simplify access to the ceiling void.



System weight

The weight of the system (including suspension grid) should be approximately 3,5 kg/m² for 20mm thickness and 5 kg/m² for 40mm thickness.



Mechanical properties


See table about Max live load and Min load bearing capacity and Functional demands, Mechanical properties at www.ecophon.com.



CE

Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.


INSTALLATION DIAGRAM (M466) FOR ECOPHON HYGIENE PERFORMANCE™ PLUS A C3

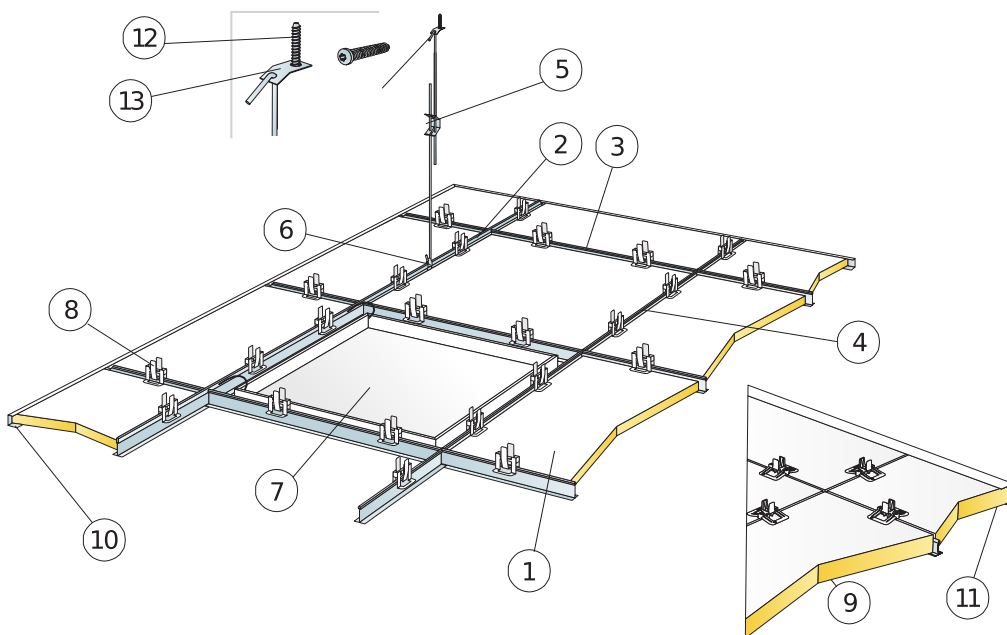


© Ecophon Group

QUANTITY SPECIFICATION (EXCL. WASTAGE)


| | Size, mm | | | |
|---|---------------------|---------------------|---------------------|---------------------|
| | 600x600 | 600x600 | 1200x600 | 1200x600 |
| 1 Hygiene Performance Plus A | 2,8/m ² | 2,8/m ² | 1,4/m ² | 1,4/m ² |
| 2 Connect T24 Main Runner C3, installed at 1200 mm centres | 0,9m/m ² | 0,9m/m ² | 0,9m/m ² | 0,9m/m ² |
| 3 Connect T24 Cross Tee C3, L=1200 mm, installed at 600 mm centres | 1,7m/m ² | 1,7m/m ² | 1,7m/m ² | 1,7m/m ² |
| 4 Connect T24 Cross Tee C3, L=600 mm | 0,9m/m ² | 0,9m/m ² | - | - |
| 5 Connect Adjustable Hanger C3, c1200 (max distance from wall 600 mm) | 0,7/m ² | 0,7/m ² | 0,7/m ² | 0,7/m ² |
| 6 Connect Hanger Clip (not to be used in swimming hall environments) | 0,7/m ² | 0,7/m ² | 0,7/m ² | 0,7/m ² |
| 7 Connect Inspection Hatch C3 | as required | as required | as required | as required |
| 8 Connect Hygiene Clip 20 | 11/m ² | 11/m ² | 7/m ² | 7/m ² |
| 9 Connect Hygiene Clip 40 | 11/m ² | 11/m ² | 7/m ² | 7/m ² |
| 10 Connect Channel Trim C3, fixed c300 (for 20 mm thickness) | as required | as required | as required | as required |
| 11 Connect Channel Trim C3, fixed c300 (for 40 mm thickness) | as required | as required | as required | as required |
| 12 Connect Anchor Screw C4 | 0,7/m ² | 0,7/m ² | 0,7/m ² | 0,7/m ² |
| 13 Connect Fixing Plate C4 | 0,7/m ² | 0,7/m ² | 0,7/m ² | 0,7/m ² |
| Δ Min. overall depth of system: 150 mm | - | - | - | - |
| δ Min. demounting depth 20 mm: 150 mm | - | - | - | - |
| δ Min. demounting depth 40 mm: 170 mm | - | - | - | - |



See Quantity Specification



Arrangement of clips



Clips for keeping tiles in position

| Size, mm | Max live load (N) | Min load bearing capacity (N) |
|----------|-------------------|-------------------------------|
| 600x600 | 50 | 160 |
| 600x600 | 50 | 160 |
| 1200x600 | 50 | 160 |
| 1200x600 | 50 | 160 |

Live load/load bearing capacity