



ECOPHON
AKUSTO™

Exploring a vertical art variety

A sound effect on people

Saint-Gobain Ecophon contributes to good indoor environments for working, healing and learning. We do this by developing, manufacturing, and delivering acoustic products and systems designed around the natural evolution of human hearing – replicating the outdoor sound experience indoors, because that's just better for people. Having a sound effect on people, in every way we can, is what we do proudly. That promise makes every one of us a passionate advocate for the importance of room acoustics to people's wellbeing – whatever the space, activity or need.



Table of contents

Good acoustics matter everywhere	6
Ecophon Akusto™	8
Ecophon Akusto™ product range	10
Akusto Wall A.....	10
Akusto Wall C.....	10
Akusto Wall C Extra Bass.....	10
Akusto Freedom	10
Akusto Triangle.....	11
Akusto Hexagon.....	11
Akusto One	11
Akusto Screen.....	11
Installation methods	23
Ecophon Akusto™ overview	24
Colours and surfaces	26
Akutex™ FT	26
Ecophon Texona.....	27
Connect Thinline Profile	28
Connect Shadow Profile	28
Connect WP Profile	28
Connect HD.....	28
Products system and properties	30
Towards net-zero acoustics.....	50

Any picture, description, illustration and dimensions contained in this brochure is for information purpose only and is not contractual. This brochure shows Ecophon products and may contain third-party's products. Ecophon shall not be liable for any misprint. Ecophon reserves the right to change product specifications at any time without prior notice. Recommendations of use and installation/assembly, as well as storage, maintenance, and indoor environment conditions, must always be respected. Please refer to the applicable technical documentation, such as technical data sheet and installation guidelines. For a comprehensive and up-to-date library of information, including the last version of applicable General Terms and Conditions of Sales, please visit www.ecophon.com

©Saint-Gobain Ecophon AB, 2025-11-10



Good acoustics matter everywhere

The importance of acoustics is underappreciated. Sound impacts us in daily life, and the scientific support for improving our indoor sound environments is welldocumented.

And what exactly is an ideal indoor sound environment for people? One based on how we experience sound outside. The human auditory sense is naturally adapted to an outdoor environment where there is not any sound reflections from ceilings and walls.

That's why most of what we do at Ecophon is about replicating the acoustic qualities found in nature for indoor environments. We want to optimise indoor spaces to our natural way of hearing, so that speech and sound is easy to hear and understand, when needed, improving performance and wellbeing.

Usually that starts with the ceiling. A wall-to-wall acoustic ceiling is the easiest way to get a large sound-absorbing surface area into a space, and is usually the best way to reduce sound strength, shorten reverberation times, and increase speech clarity and overall hearing comfort.



ECOPHON AKUSTO™


Exploring a vertical art variety

Ecophon Akusto™ is a complement to acoustic ceilings that solves acoustic challenges and allows opportunities to follow current design and installation trends. The panel surface is available in Texona, Super G and Akutex FT.

- Excellent acoustics
- Wall and screen absorbers with many installation solutions
- A vertical solution in a variety of surfaces, colours and shapes

When designing a space for optimal acoustic performance, a sound-absorbing ceiling is the first priority – but bare walls will still create echoes. Akusto panels will solve this by absorbing sound and give clearer speech, lower sound strength, reduce sound propagation and take away flutter echoes.

With Akusto, it is easy to create workplaces where people feel good and can perform at their very best.

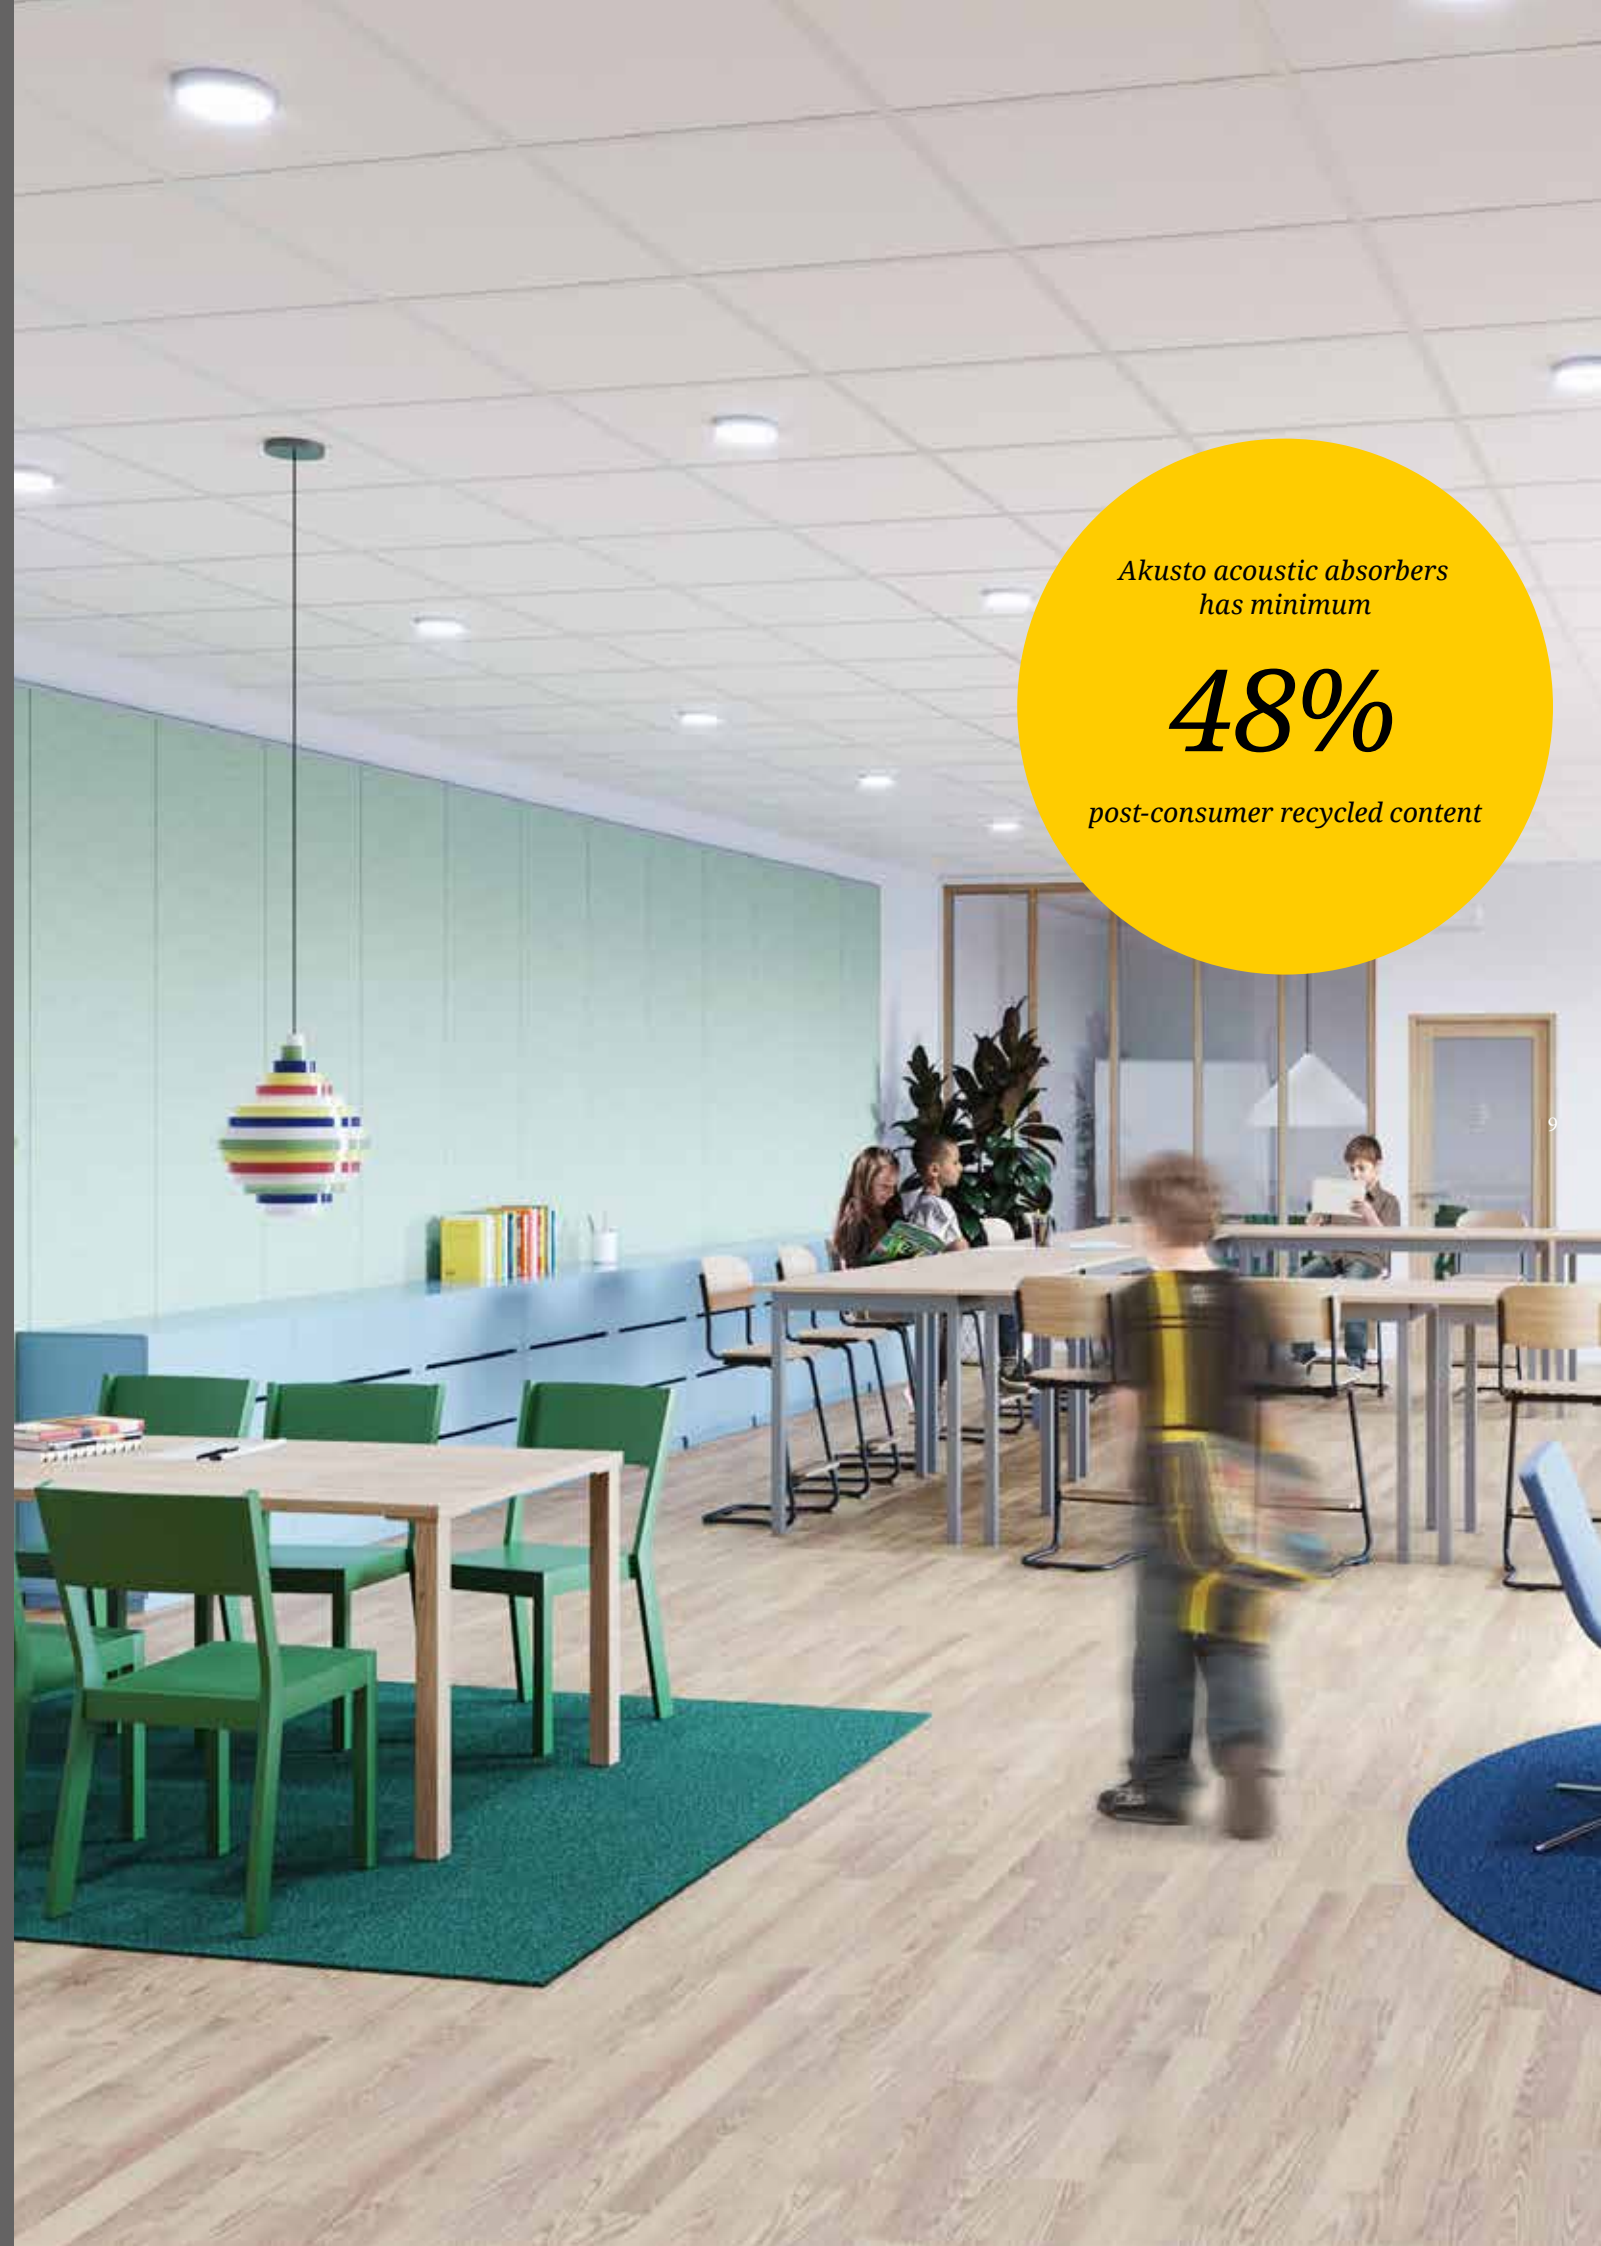

*Akusto acoustic absorbers
has minimum*

48%


post-consumer recycled content

Product range


ECOPHON AKUSTO™

Akusto gives you many ways to individualise your acoustic solution in unique and expressive configurations. Choose Akusto Wall C Extra Bass to get increased speech clarity due to the extra absorption feature for low frequency sounds. Screens are ideal for strategic acoustic performance support. Akusto Screen is light and freestanding, so it can be re-positioned as needed.


AKUSTO WALL A

	Measurements	Grids/profiles
	2700x1200x40	Channel trim, Thinline


AKUSTO WALL C

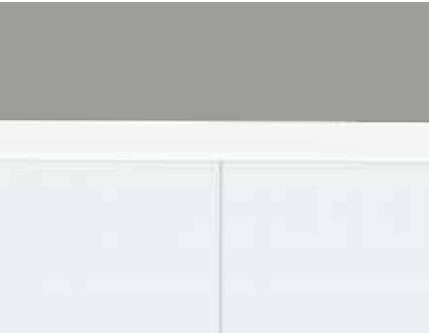	Measurements	Grids/profiles
	2700x600x40	Thinline Profile, WP Profile


AKUSTO WALL C EXTRA BASS

	Measurements	Grids/profiles
	2700x600x80	Akusto Extra Bass (40mm)


AKUSTO FREEDOM

	Measurements	Grids/profiles
	300x300	Special Fixing
	≤400x400-1200x1200	Special Fixing


AKUSTO ONE

	Measurements	Grids/profiles
	Ø592x40	Special Fixing
	Ø792x40	Special Fixing
	Ø1192x40	Special Fixing
	592x592x40	Special Fixing
	1192x292x40	Special Fixing
	1192x592x40	Special Fixing


AKUSTO TRIANGLE

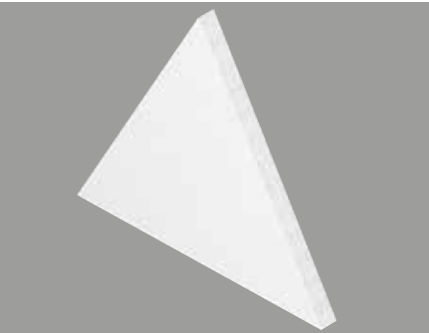	Measurements	Grids/profiles
	513x592x40	Special Fixing

AKUSTO HEXAGON

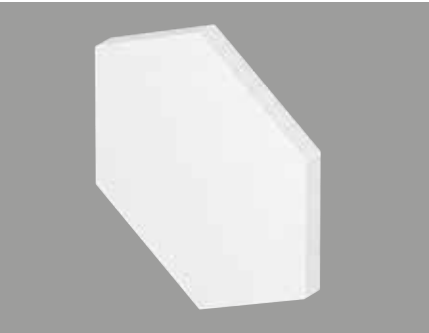
	Measurements	Grids/profiles
	513x592x40	Special Fixing

AKUSTO SCREEN

	Measurements	Grids/profiles
	1500x1200x40	Freestanding



AKUSTO WALL A
Framed wall panels in wide range of colours.

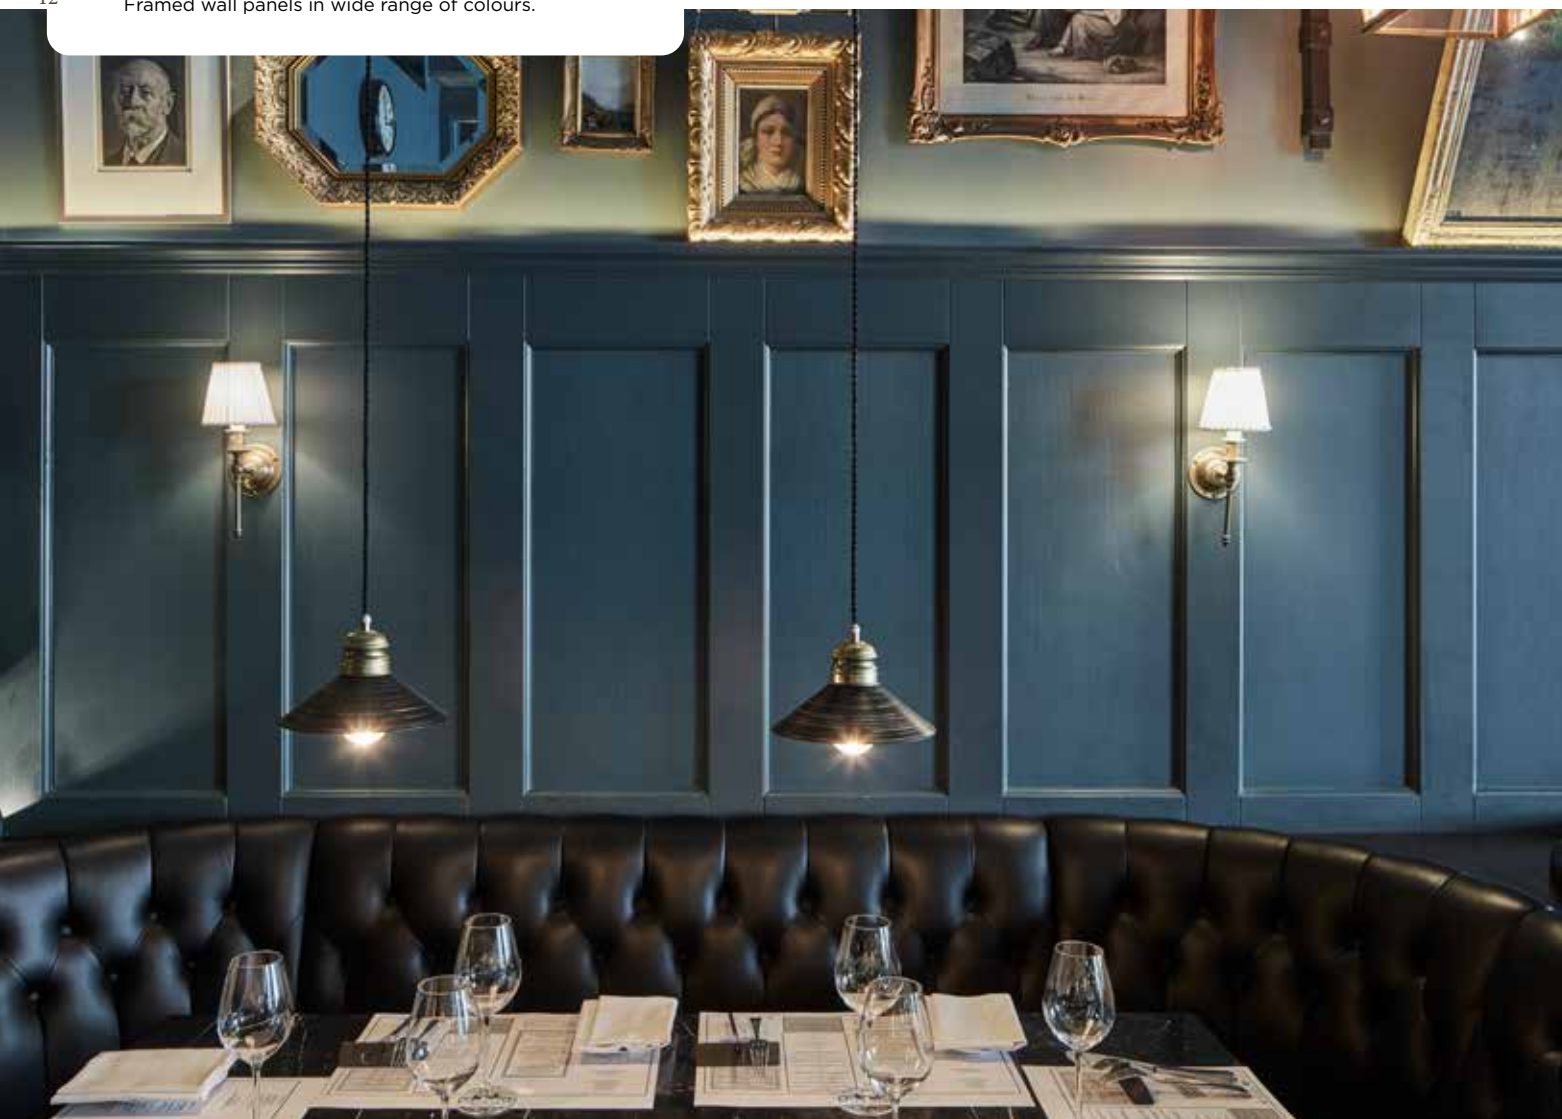

AKUSTO WALL A
Framed wall panels in wide range of colours.



AKUSTO WALL C EXTRA BASS
Shadow framed low frequency wall panel solution in wide range of colours.

14




AKUSTO WALL C
Smoothly framed wall panel solutions in wide range of colours.

15



AKUSTO WALL C
Smoothly framed wall panel solutions in wide range of colours.

15

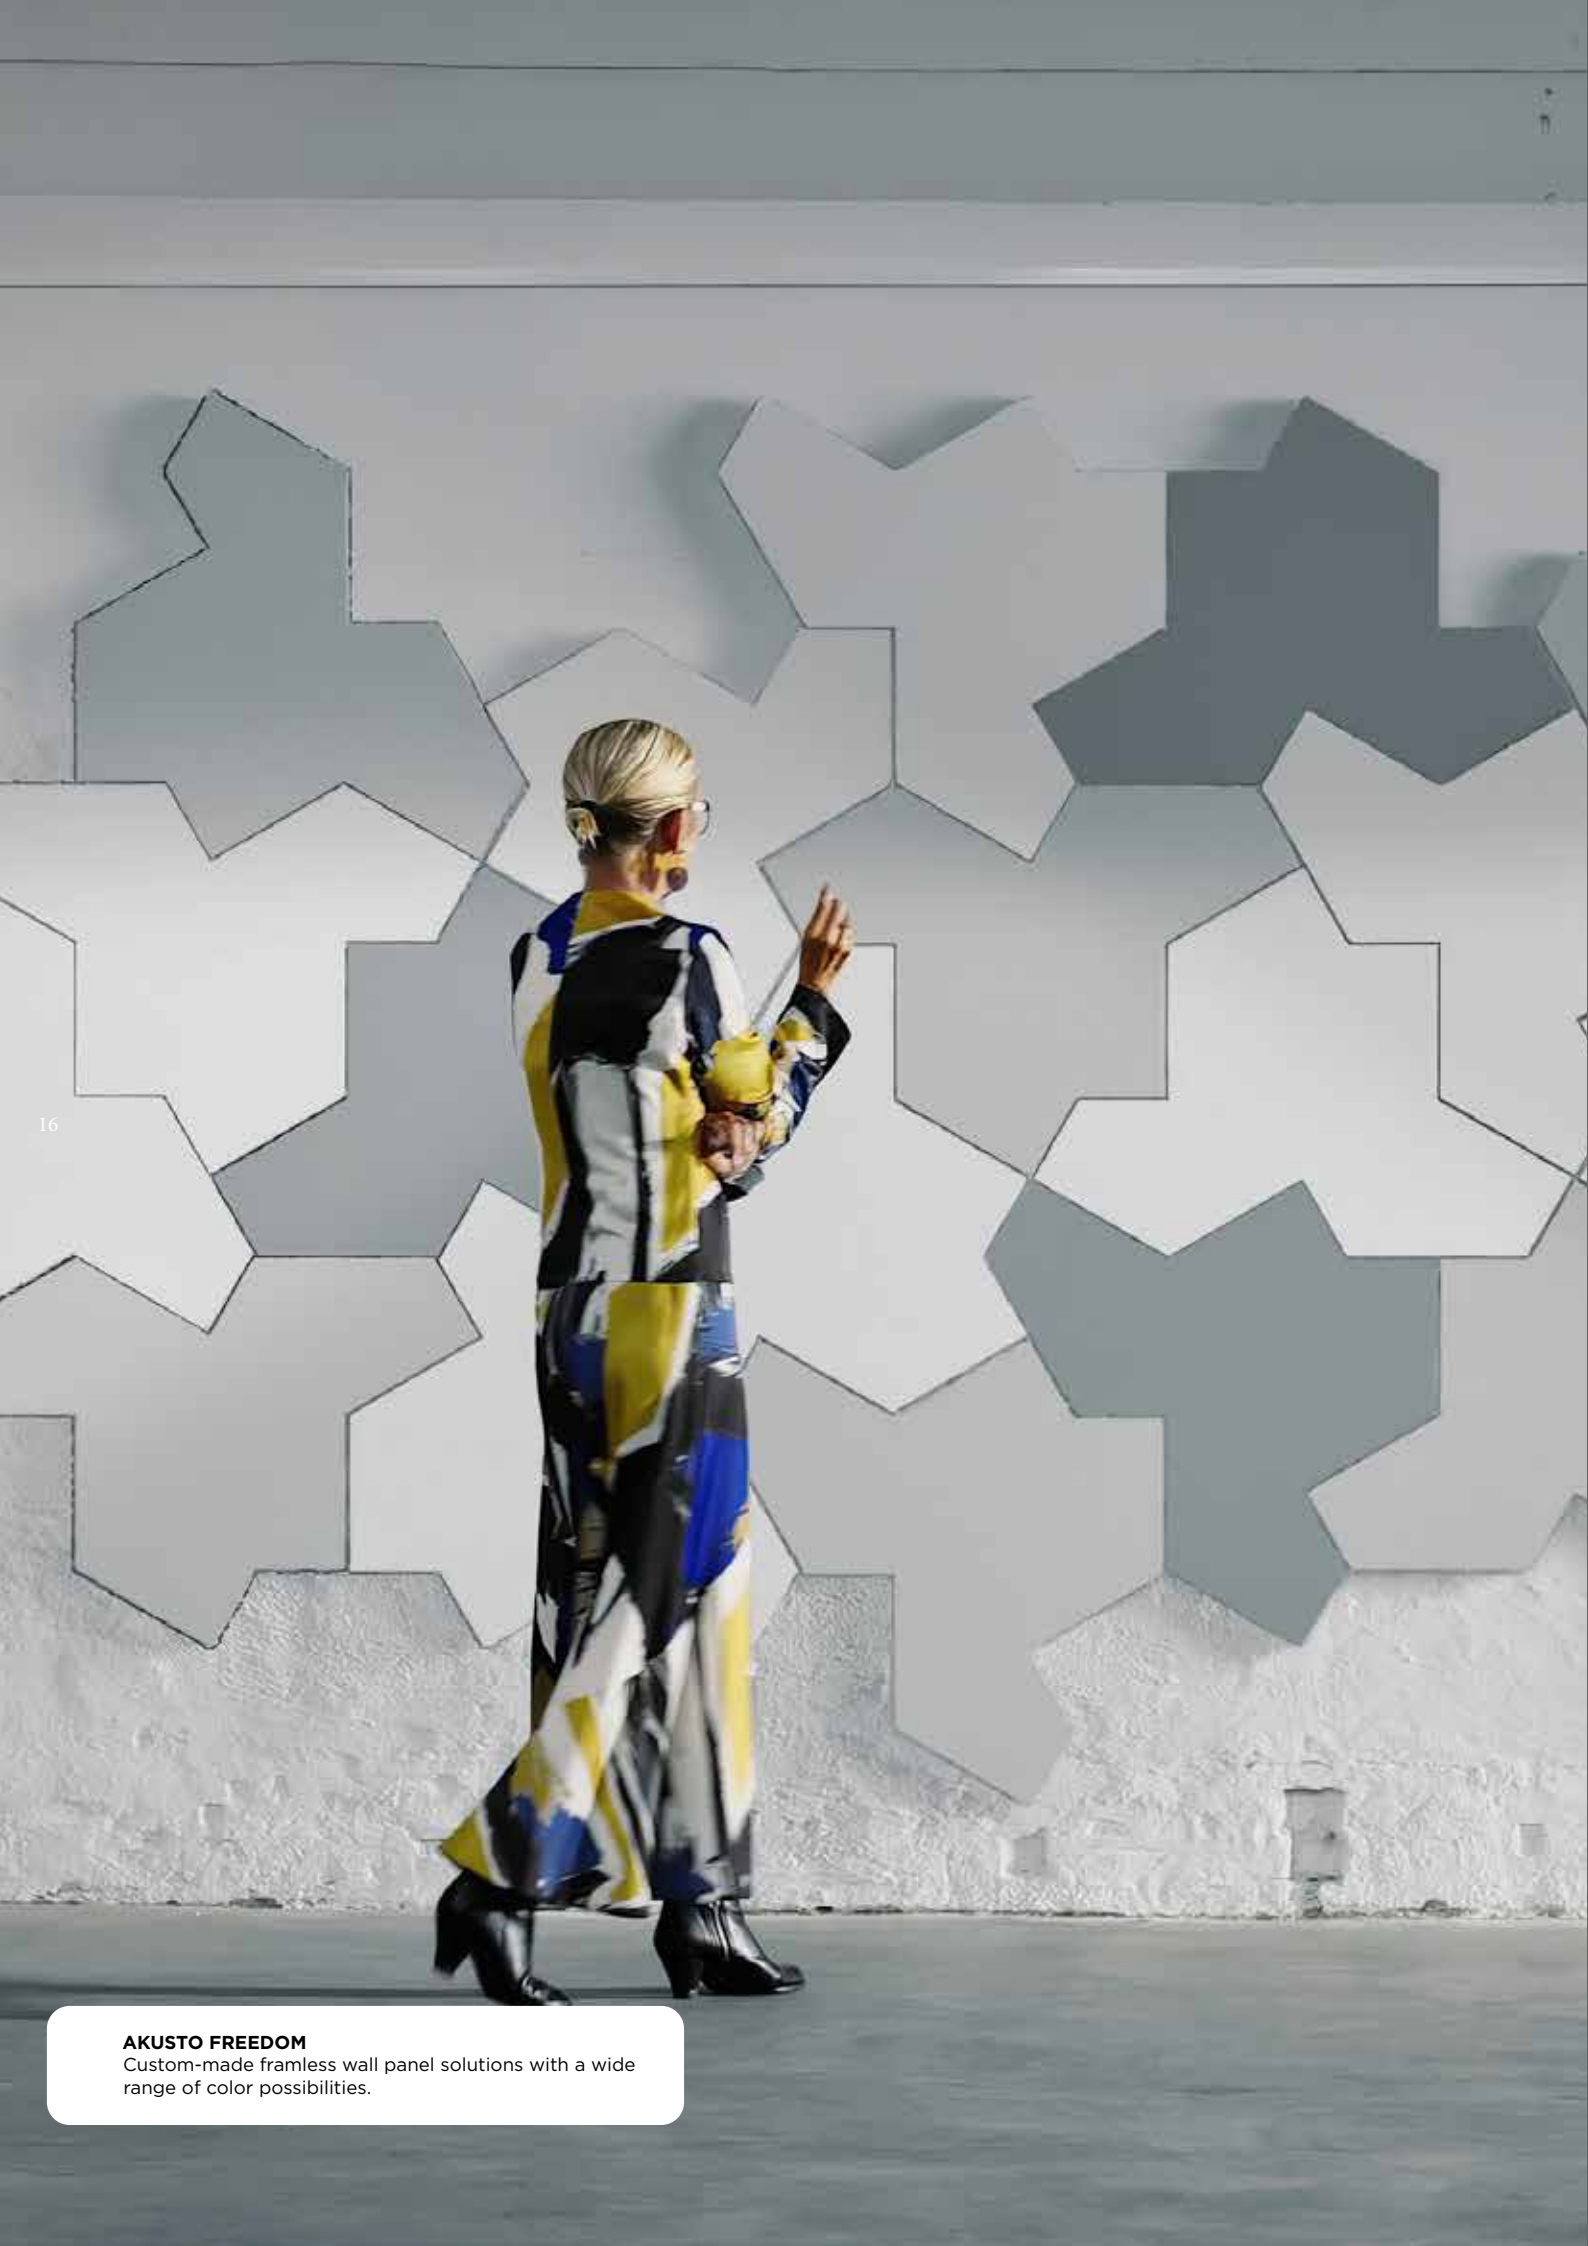

AKUSTO FREEDOM
Custom-made framless wall panel solutions with a wide range of color possibilities.


Custom shapes and endless patterns

Unique is the new standard

Create striking shapes and a gentle sound environment with Akusto wall panels. Draw your own custom shapes with Akusto Freedom or build one-of-a-kind patterns using Akusto Triangle and Hexagon.

Features

- Unlimited shapes with Akusto Freedom
- Create patterns with Akusto Triangle and Akusto Hexagon
- Hang with Connect™ One Trim or glue directly to the wall
- Create 3D-effect with individual panels standing out
- Superior acoustic qualities

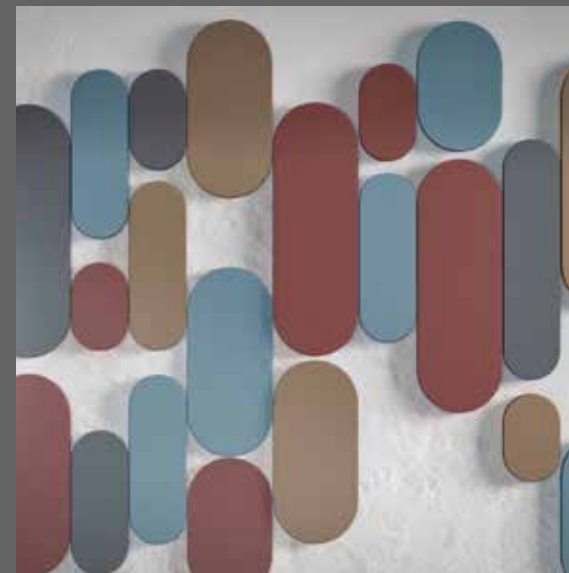



AKUSTO TRIANGLE
Frameless wall panel solutions in a wide range of colours.







AKUSTO HEXAGON
Frameless wall panel solutions in a wide range of colours.



AKUSTO ONE
Easy to install frameless wall panels in many shapes and colours.

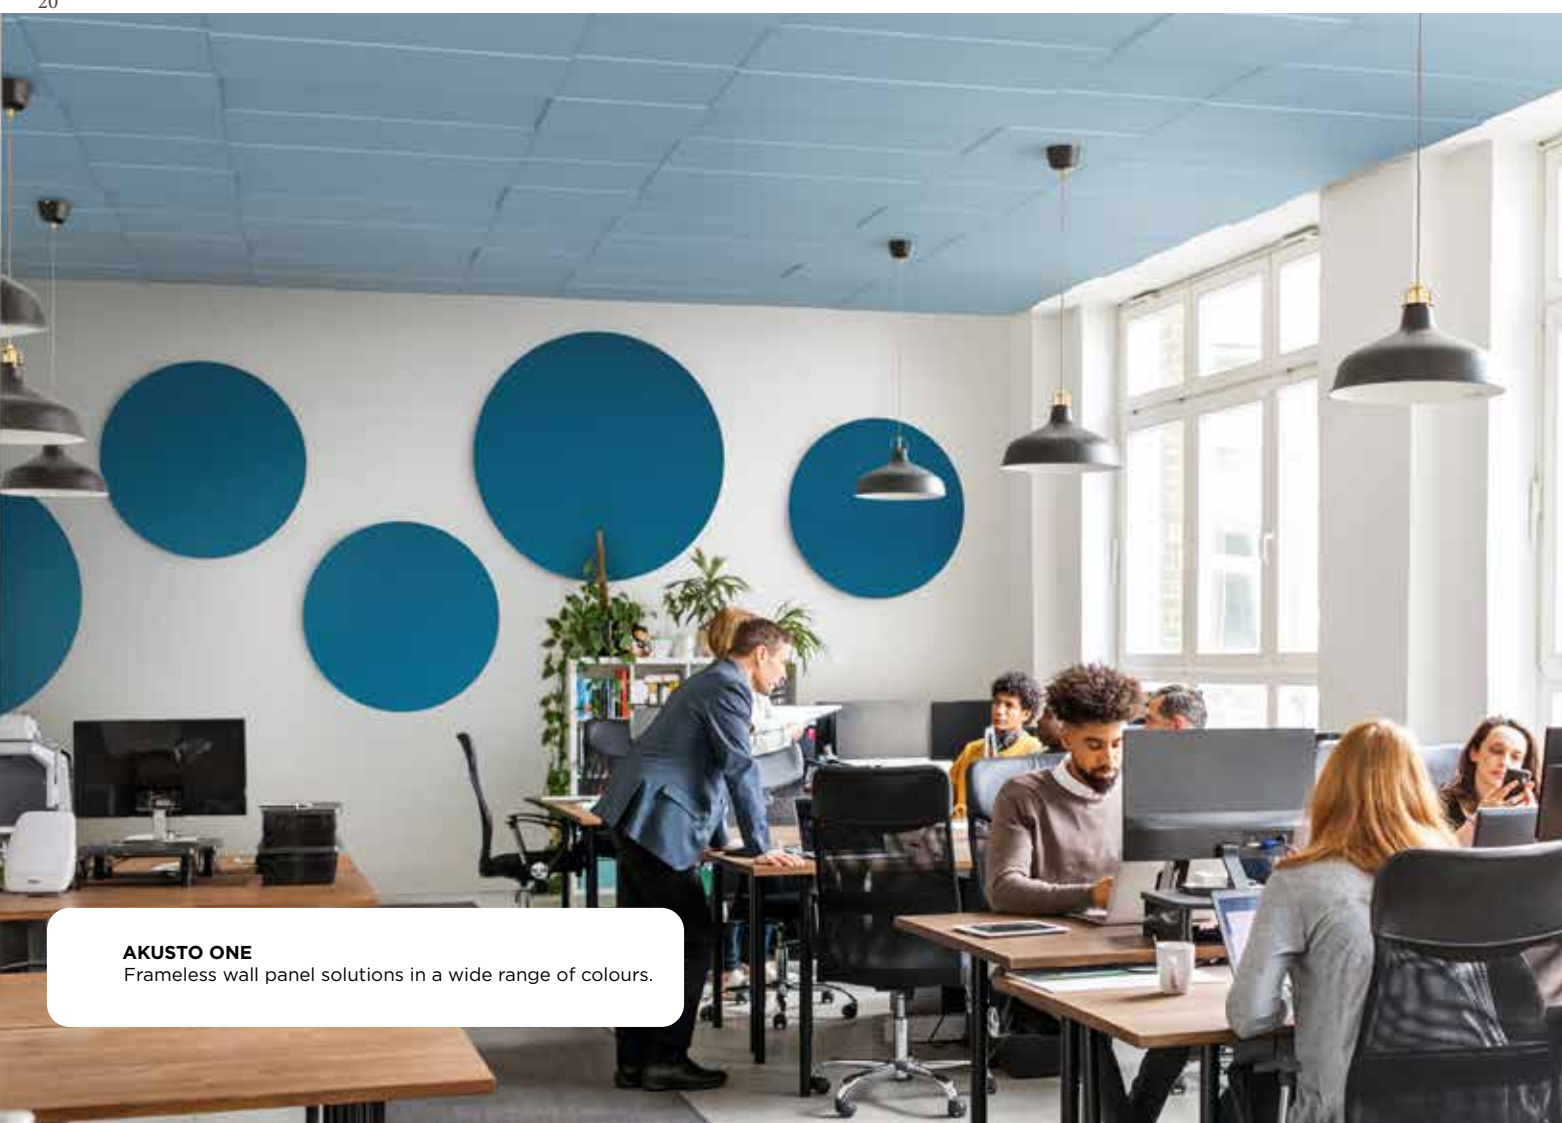

AKUSTO ONE
Frameless wall panel solutions in a wide range of colours.

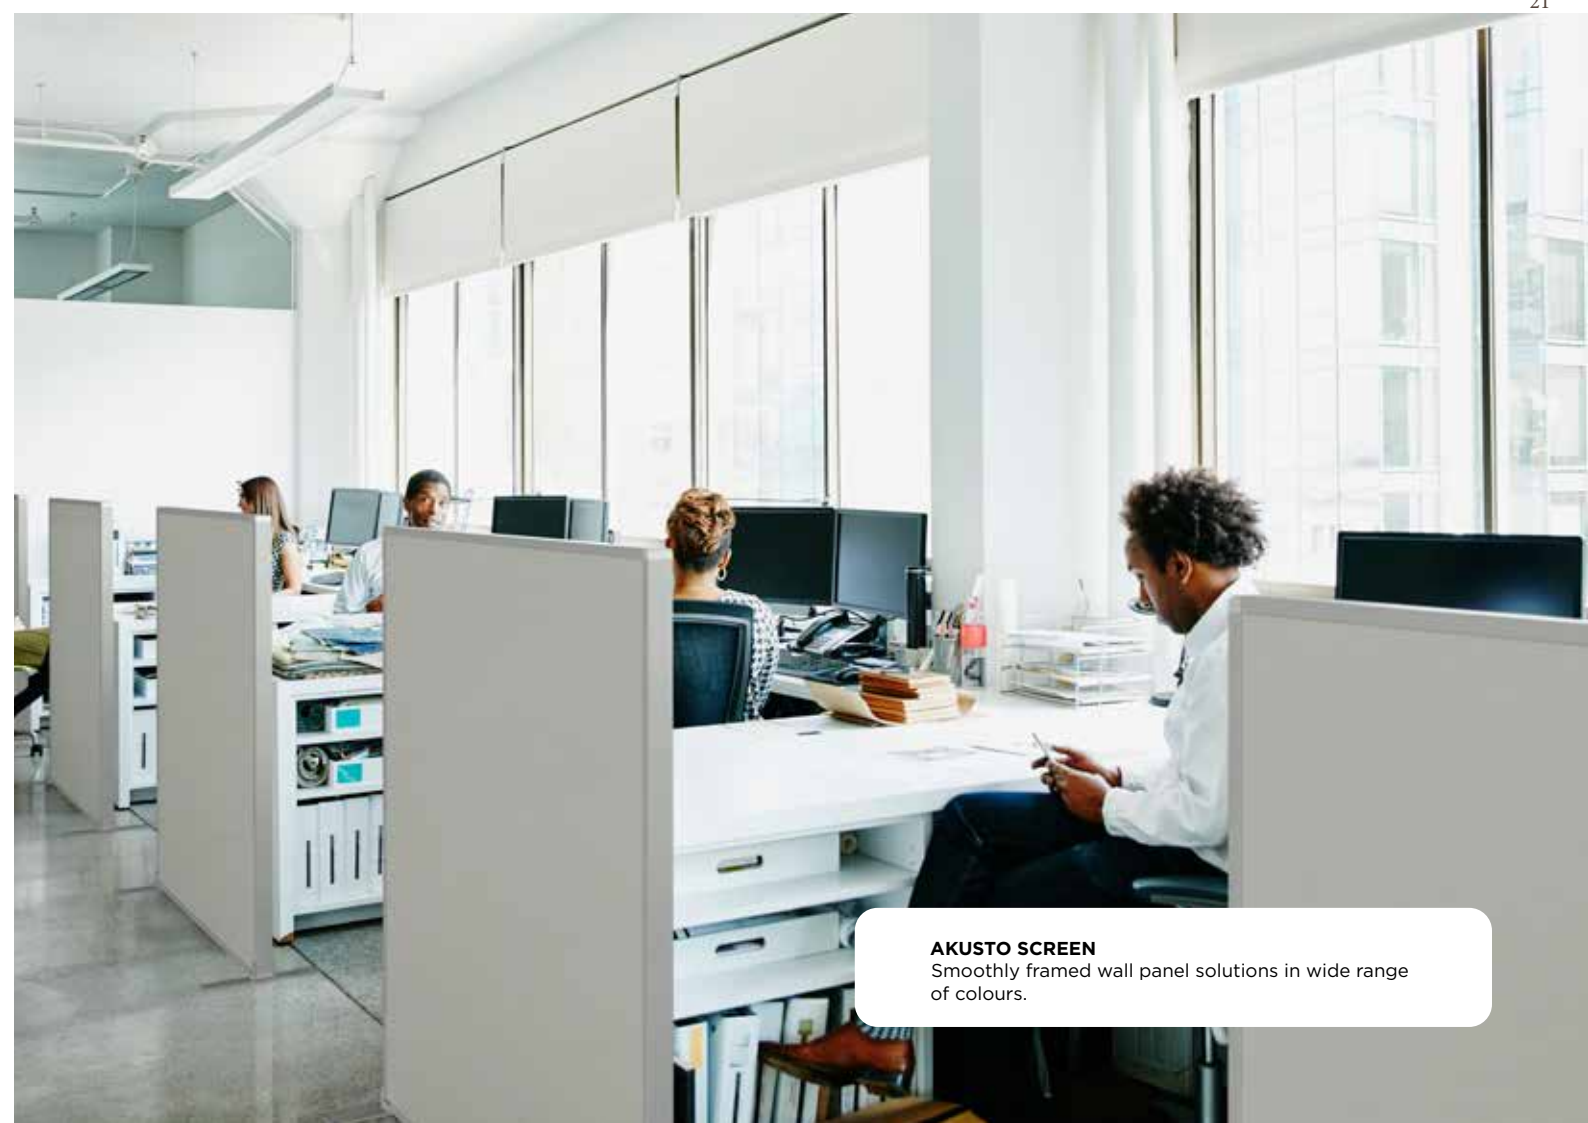

AKUSTO SCREEN
Smoothly framed wall panel solutions in wide range of colours.

Ecophon E-tools

Ecophon offers several useful tools and services for the different phases of the building process, from inspiration to specific maintenance instructions for your Ecophon products.

Read more and try our E-tools at www.ecophon.com

Installation methods

The innovative Connect™ accessories enable the wall absorbers to be mounted with a perfect fit and in many different ways. As Ecophon Akusto is designed for flexible placement, the creative ways to arrange them are almost endless.

Ecophon Akusto™ ONE



Connect One Trim is screwed to the wall and holds the Connect Absorber Anchor One, which attaches to the back of the panel. It comes in two versions and creates a 3D effect when combined.



Connect One Fixing is a holder screwed to the wall. The panel is secured with a specially designed, textured button, available in several colours.



Connect One Hook fixing is a plate with hooks which is screwed to the wall and the panel is pressed onto the hooks.

Ecophon Akusto™ Wall



Connect Shadow Profile has a design which creates a shadow effect. The elegant solution gives a light impression and allows you to create fields of colours and patterns both vertically and horizontally.



Connect Thinline Profile is an elegant solution which allows you to create fields of colours and patterns both vertically and horizontally.














Connect WP Profile is a robust profile solution that establishes a distinct frame around the wall panel.



Connect Channel Trim is a simple and functional solution. It can be installed with Connect T24 Main Runners or by using Connect Recessed Profile.

ECOPHON AKUSTO™ OVERVIEW

			Installation methods								
Shape	Product	Size (mm)	Wall with Connect Thinline Profile	Wall with Connect Shadow Profile	Wall with Connect WP Profile	Wall with Connect Channel Trim	Wall with Connect One Hook	Wall with Connect One Trim	Wall with Connect Absorber Glue	Floor standing	Surface
	Ecophon Akusto Wall A	2700x1200x40	.			.					Akutex FT Ecophon Texona Ecophon Super G
	Ecophon Akusto Wall C	2700x600x40	.		.						Akutex FT Ecophon Texona Ecophon Super G
	Ecophon Akusto Wall C Extra Bass	2700x600x80		.							Akutex FT Ecophon Texona
	Ecophon Akusto Freedom	300x300					.		.		
		≤400x400-1200x1200					.	.	.		
   	Ecophon Akusto One	592x592x40				.	.				Akutex FT
		1192x292x40				.	.				
		1192x592x40				.	.				
		Ø592x40 Ø792x40 Ø1192x40					.	.			
	Ecophon Akusto Triangle	513x592x40					.	.	.		
	Ecophon Akusto Hexagon	513x592x40					.	.	.		Akutex FT
	Ecophon Akusto Screen	1500x1200x40								.	Akutex FT



Ecophon Akusto panels contribute to a healthy indoor environment with superior acoustic absorption, low VOC emissions in line with the strictest requirements, and a full chemical transparency with verified Health Product Declarations. The low environmental footprint of our Akusto panels is third-party verified in Environmental Product Declarations.

The products do not contribute to fire and the glass wool core of the Akusto tiles is tested and classified as non-combustible according to EN ISO 1182. Fire classification according to EN 13501-1, see Technical Properties on respectively product.

Note
More product and system information such as installation help and sustainability documentation can be found at www.ecophon.com

Colours and surfaces

Akutex™ FT















The Akutex label guarantees that the product carrying it has a superior surface technology. Our research and development will always focus on visual aspects, acoustic properties, working environment, architectural trends and environmental aspects. This ensures that Akutex is always one step ahead.

					
White Frost Light reflectance: 85% Nearest NCS colour sample S 0500-N.	Ocean Storm Light reflectance: 24% Nearest NCS colour sample S 4020-R90B.	Morning Drizzle Light reflectance: 69% Nearest NCS colour sample S 1002-B.	Volcanic Ash Light reflectance: 56% Nearest NCS colour sample 2002-Y.	Moonlight Sky Light reflectance: 7% Nearest NCS colour sample S 7020-R90B.	Cloudy Day Light reflectance: 62% Nearest NCS colour sample S 1500-N.
					
Silver Stone Light reflectance: 29% Nearest NCS colour sample S 4502-Y.	Golden Field Light reflectance: 61% Nearest NCS colour sample S 1040-G90Y.	Peach Rose Light reflectance: 55% Nearest NCS colour sample S 1515-Y80R.	Silk Slate Light reflectance: 13% Nearest NCS colour sample S 7000-N.	Sunset Heat Light reflectance: 20% Nearest NCS colour sample S 2070-Y60R.	Highland Fog Light reflectance: 55% Nearest NCS colour sample S 2005-G.
					
Goji Berry Light reflectance: 27% Nearest NCS colour sample S 3030-Y80R.	Ruby Rock Light reflectance: 7% Nearest NCS colour sample S 4050-R10B.	Sage Garden Light reflectance: 40% Nearest NCS colour sample S 3010-B30G.	Silent Steam Light reflectance: 45% Nearest NCS colour sample S 2010-B.	Eucalyptus Leaf Light reflectance: 23% Nearest NCS colour sample S 5010-B30G.	Fresh Clove Light reflectance: 35% Nearest NCS colour sample S 3020-G40Y.
					
Scallop Shells Light reflectance: 76% Nearest NCS colour sample S 0804-Y50R.	Summer Forest Light reflectance: 10% Nearest NCS colour sample S 6030-G10Y.	Wet Sand Light reflectance: 35% Nearest NCS colour sample S 3020-Y30R.	Dark Diamond Light reflectance: 4% Nearest NCS colour sample S 9000-N.		

Note
Colours may vary slightly between different production batches. Reproduction of colours vary between print and reality.

Ecophon Texona

If you want to create expressive sound absorbing wall or screen solutions with a wide range of colours, Texona is the perfect choice. Texona has a smooth textured surface and available in a variety of colours that allude to flavours.

					
Sea Salt Light reflectance: 85% Nearest NCS colour sample S 0500-N.	Sage Light reflectance: 41% Nearest NCS colour sample S 3010-B30G.	Pepper Light reflectance: 17% Nearest NCS colour sample S 6502-Y.	Poppy Seed Light reflectance: 28% Nearest NCS colour sample S 3020-B10G.	Garlic Light reflectance: 52% Nearest NCS colour sample S 2502-Y.	Eucalyptus Light reflectance: 23% Nearest NCS colour sample S 5010-B30G.
					
Ginger Light reflectance: 56% Nearest NCS colour sample S 2005-Y30R.	Acai Light reflectance: 12% Nearest NCS colour sample S 6020-R90B.	Oyster Light reflectance: 32% Nearest NCS colour sample S 4005-Y20R.	Peach Light reflectance: 52% Nearest NCS colour sample S 1515-Y80R.	Scallop Light reflectance: 67% Nearest NCS colour sample S 1005-Y40R.	Goji Light reflectance: 24% Nearest NCS colour sample S 3030-Y80R.
					
Thyme Light reflectance: 47% Nearest NCS colour sample S 2010-B90G.	Liquorice Light reflectance: 5% Nearest NCS colour sample S 9000-N.				


Ecophon Super G

The Super G surface has been designed for environments where mechanical impact occurs. Super G is a glass fibre fabric with high impact resistance.



White 085 Light reflectance: 78% Nearest NCS colour sample S 1002-Y.

Note
Colours may vary slightly between different production batches. Reproduction of colours vary between print and reality.


Connect Thinline Profile




White 02
Textured, S 1002-Y.



Grey 03
Textured, S 1500-N.




Grey 04
Textured, S 4500-N.




Black 01
Textured, S 9000-N.

Connect Shadow Profile




Grey 03
Textured, S 1500-N.


Connect WP Profile



White 03
Textured, S 0502-Y.



Natural anodized
Textured, S 1000-N.



Black 01
Textured, S 9000-N.

Connect HD

White 02
S 0500-Y.

Note
Colours may vary slightly between different production batches. Reproduction of colours vary between print and reality.




Products

Systems and properties

Acoustics, technical properties and installation diagrams

Akusto Wall A	32
Akusto Wall C.....	35
Akusto Wall C Extra Bass.....	38
Akusto Triangle	40
Akusto Hexagon.....	42
Akusto One	44
Akusto Screen.....	48




Ecophon Akusto™ Wall A

Acoustic:

Sound Absorption:

Test results according to EN ISO 354. Classification according to EN ISO 11654, and the single value ratings for Noise Reduction Coefficient, NRC and Sound Absorption Average, SAA according to ASTM C 423.

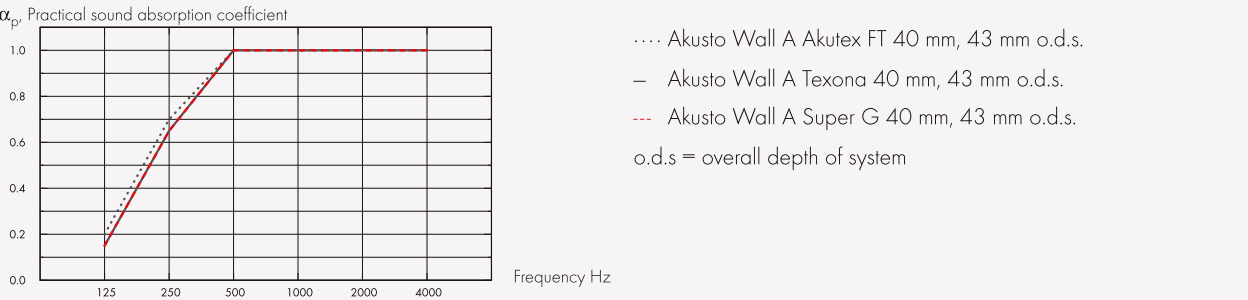

	THK mm	o.d.s. mm	α_p Practical sound absorption coefficient						α_w	Sound absorption class
			125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
Akutex FT	40	43	0.20	0.70	1.00	1.00	1.00	1.00	1.00	A
Texona	40	43	0.15	0.65	1.00	1.00	1.00	1.00	1.00	A
Super G	40	43	0.15	0.65	1.00	1.00	1.00	1.00	0.95	A

THK mm	AC(1.5) Articulation Class, ASTM E1111, ASTM E1110
40	230

Indoor Air Quality:

Certificate / Label	
Eurofins Indoor Air Comfort®	IAC Gold
French VOC	A+

Cradle to Cradle Certified®: Akusto products with Akutex FT surface are Cradle to Cradle Certified® at Bronze level (version 4.0).

Material Health: Akusto products with Akutex FT surface have received a C2C Certified Material Health Certificate™ at the Silver level (standard version 4.0). The C2C Certified Material Health Certificate™ is a verification of the health and safety of a product’s composition using the Material Health requirements of the Cradle-to-Cradle Certified Product Standard.

Carbon footprint: Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO ₂ equiv/m ²
Akusto Wall A - Texona	4,74 (Akusto Wall A EPD in conformity with ISO 14025 / EN 15804)
Akusto Wall A - Akutex FT	3,96 (Akusto Wall A EPD in conformity with ISO 14025 / EN 15804)
Akusto Wall A - Super G	6,21 (Akusto Wall A EPD in conformity with ISO 14025 / EN 15804)

Circularity: Minimum post-consumer recycled content: 53%, Recyclability: Fully recyclable,

Fire safety: The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. Europe: EN 13501-1, A2-s1,d0,

Humidity Resistance: Class C, relative humidity 95% and 30°C, according to EN 13964:2014

Visual appearance: Akusto Wall in white has high light reflectance. Light reflectance and nearest NCS colour sample for all the different colours: See Ecophon Colours and surfaces.

Cleanability: Daily dusting, vacuum cleaning and weekly wet wiping (Super G and Akutex FT surfaces). Weekly dusting and vacuum cleaning (Texona surface).

Use of disinfectants: Texona Ginger, Sea salt, Thyme, Oyster and Garlic withstand the frequent use of ethanol (70%)-based disinfectants. Dampen a soft polyester microfiber cloth with the solution and wipe the surface in gentle circular movements.

Accessibility: The tiles are not demountable except in selected installation diagrams. See quantity specification for more information.

Installation: Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification. The systems should not be placed behind goals or similar areas where they frequently will be hit by hard ball shots. In such cases a protective net in front of the system is recommended.

Packaging information: Information is indicative and subject to change. 2700x1200x40 : A, 4, 12.96,

System weight: Weight information is indicative and subject to variation. Akusto Wall A/Akutex FT: 2,5, Akusto Wall A/Texona : 2,5, Akusto Wall A/Super G: 2,7,


Mechanical properties: No additional live load is allowed.

Impact Resistance: Tested and classified to fulfil the requirements of DIN 18032-3, equivalent to 1A according to EN13964. Texona surface has moderate impact resistance. Please note: Where the panels are subjected to frequent blows and impacts e.g. behind goal mouths, protection in form of e.g restraining nets or wooden slats is required. Super G: M353, Fulfills,


CE: Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.

Installation diagram in detail www.ecophon.com


M353
Installation diagram (M353) for Ecophon Akusto Wall A

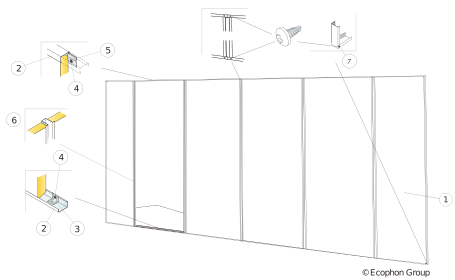



M593
Installation diagram (M593) for Ecophon Akusto Wall A vertical installation with Connect Thinline profiles.

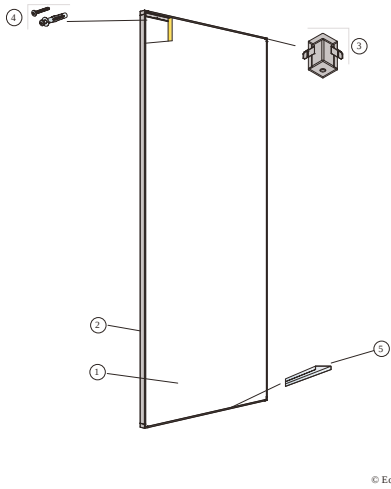

M504
Installation diagram (M504) for Ecophon Akusto Wall A




M595
Installation diagram (M595) for Ecophon Akusto Wall A horizontal installation with Connect Thinline profiles.

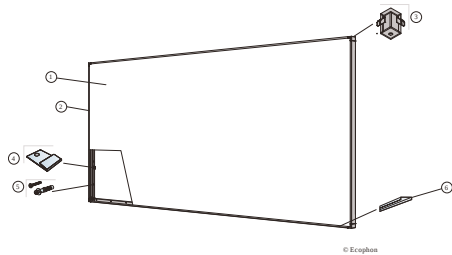

Ecophon Akusto™ Wall C

Acoustic:

Sound Absorption:
Test results according to EN ISO 354. Classification according to EN ISO 11654, and the single value ratings for Noise Reduction Coefficient, NRC and Sound Absorption Average, SAA according to ASTM C 423.

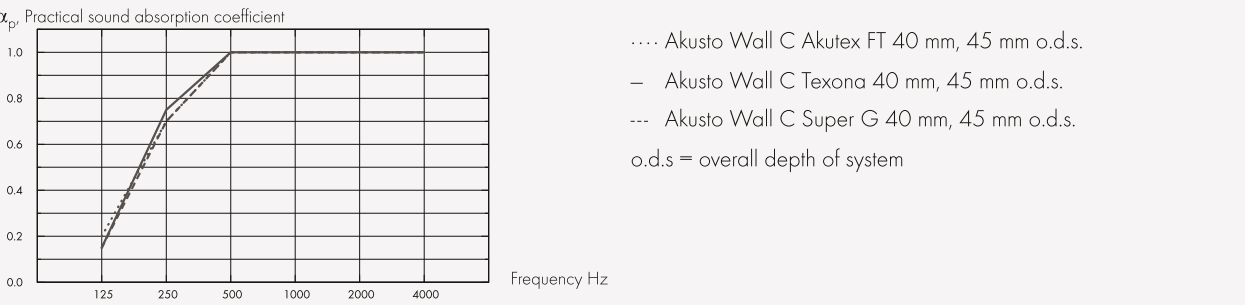

	THK mm	o.d.s. mm	α_p Practical sound absorption coefficient						α_w	Sound absorption class
			125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
Akutex FT	40	45	0.20	0.70	1.00	1.00	1.00	1.00	1.00	A
Texona	40	45	0.15	0.75	1.00	1.00	1.00	1.00	1.00	A
Super G	40	45	0.15	0.70	1.00	1.00	1.00	1.00	1.00	A

	THK mm	o.d.s. mm	NRC	SAA
Texona	40	45	0.95	0.96
Super G	40	45	0.95	0.96

THK mm	AC(1.5) Articulation Class, ASTM E1111, ASTM E1110
40	240

Indoor Air Quality:

Certificate / Label	
Eurofins Indoor Air Comfort®	IAC Gold
French VOC	A+

Cradle to Cradle Certified®: Akusto products with Akutex FT surface are Cradle to Cradle Certified® at Bronze level (version 4.0).

Material Health: Akusto products with Akutex FT surface have received a C2C Certified Material Health Certificate™ at the Silver level (standard version 4.0). The C2C Certified Material Health Certificate™ is a verification of the health and safety of a product’s composition using the Material Health requirements of the Cradle-to-Cradle Certified Product Standard.

Carbon footprint: Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO ₂ equiv/m ²
Akusto Wall C - Texona	6,18 (Akusto Wall C EPD in conformity with ISO 14025 / EN 15804)
Akusto Wall C - Akutex FT	6,42 (Akusto Wall C EPD in conformity with ISO 14025 / EN 15804)
Akusto Wall C - Super G	7,28 (Akusto Wall C EPD in conformity with ISO 14025 / EN 15804)

Circularity: Minimum post-consumer recycled content: 60%, Recyclability: Fully recyclable,

Fire safety: The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. Europe: EN 13501-1, A2-s1,d0,

Humidity Resistance: Class C, relative humidity 95% and 30°C, according to EN 13964:2014

Visual appearance: Akusto Wall in white has high light reflectance. Light reflectance and nearest NCS colour sample for all the different colours: See Ecophon Colours and surfaces.

Cleanability: Daily dusting, vacuum cleaning and weekly wet wiping (Super G and Akutex FT surfaces). Weekly dusting and vacuum cleaning (Texona surface).

Use of disinfectants: Texona Ginger, Sea salt, Thyme, Oyster and Garlic withstand the frequent use of ethanol (70%)-based disinfectants. Dampen a soft polyester microfiber cloth with the solution and wipe the surface in gentle circular movements.

Accessibility: The tiles are not demountable except in selected installation diagrams. See quantity specification for more information.

Installation: Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification. The systems should not be placed behind goals or similar areas where they frequently will be hit by hard ball shots. In such cases a protective net in front of the system is recommended.

Packaging information: Information is indicative and subject to change. 2700x600x40 : C, 4, 6.48,

System weight: Weight information is indicative and subject to variation. Akusto Wall C/Akutex FT: 3,5, Akusto Wall C/Texona : 3,5, Akusto Wall C/Super G: 3,7,


Mechanical properties: No additional live load is allowed.

Impact Resistance: Tested and classified to fulfil the requirements of DIN 18032-3, equivalent to 1A according to EN13964. Super G: M354, M609, Fulfills,


CE: Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.

Installation diagram in detail www.ecophon.com


M609
Installation diagram (M609) for Ecophon Akusto Wall C vertical installation with Connect Thinline profiles.

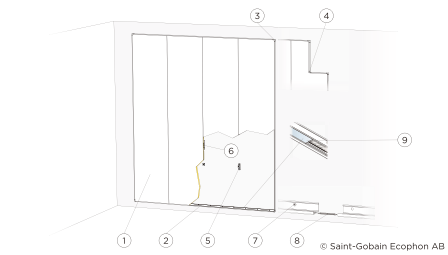


M355
Installation diagram (M355) for Ecophon Akusto Wall C horizontal installation

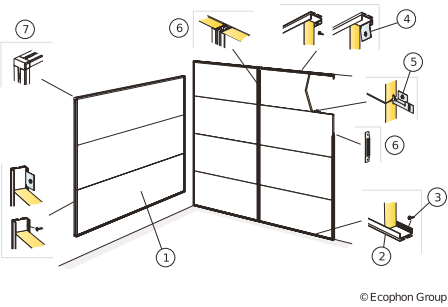


M354
Installation diagram (M354) for Ecophon Akusto Wall C vertical installation

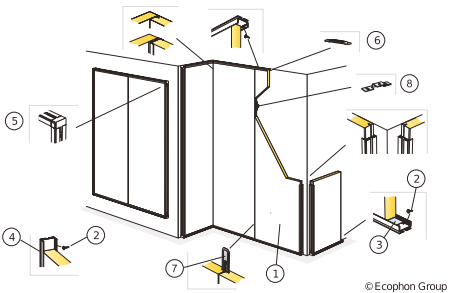

M592
Installation diagram (M592) for Ecophon Akusto Wall C horizontal installation with Connect Thinline profiles

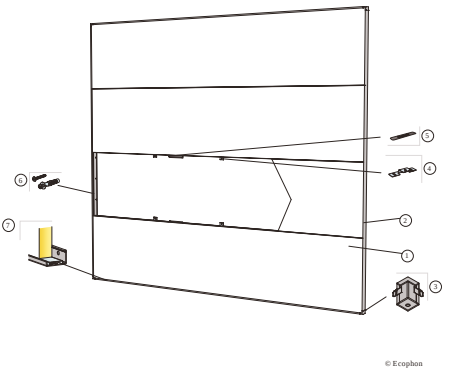



Ecophon Akusto™ Wall C Extra Bass

Acoustic:

Sound Absorption:

Test results according to EN ISO 354. Classification according to EN ISO 11654, and the single value ratings for Noise Reduction Coefficient, NRC and Sound Absorption Average, SAA according to ASTM C 423.



Indoor Air Quality:

Certificate / Label	
Eurofins Indoor Air Comfort®	IAC Gold
French VOC	A+

Carbon footprint: Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO ₂ equiv/m ²
Akusto Wall C Extra Bass/Texona	7,42
Akusto Wall C Extra Bass/Akutex FT	7,26
Akusto Wall C Extra Bass/Super G	8,74

Circularity: Minimum post-consumer recycled content: 60%, Recyclability: Fully recyclable,

Fire safety: The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. Europe: EN 13501-1, A2-s1,d0,

Humidity Resistance: Class C, relative humidity 95% and 30°C, according to EN 13964:2014

Visual appearance: Akusto Wall in white has high light reflectance. Light reflectance and nearest NCS colour sample for all the different colours: See Ecophon Colours and surfaces.

Cleanability: Daily dusting, vacuum cleaning and weekly wet wiping (Akutex FT surfaces). Weekly dusting and vacuum cleaning (Texona surfaces).

Use of disinfectants: Texona Ginger, Sea salt, Thyme, Oyster and Garlic withstand the frequent use of ethanol (70%)-based disinfectants. Dampen a soft polyester microfiber cloth with the solution and wipe the surface in gentle circular movements.

Accessibility: The tiles are not demountable.


Installation: Installed according to installation diagrams, installation guides and drawing aid.


System weight: Weight information is indicative and subject to variation. Akusto Wall C/Akutex FT: 3,5, Akusto Wall C/Texona: 3,5, Akusto Extra Bass: 1,2,

Mechanical properties: No additional live load is allowed.

CE: Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.

Installation diagram in detail www.ecophon.com

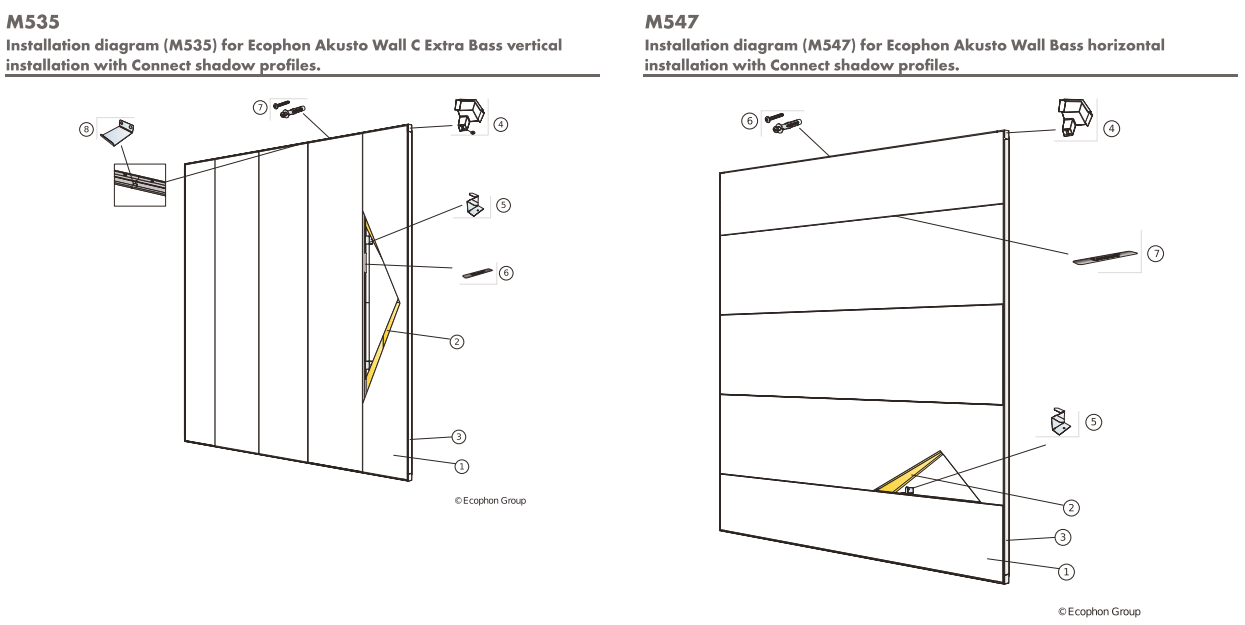




Ecophon Akusto™ Triangle

Acoustic: The values in the diagram refer to a single unit.

Sound Absorption:
Based on test results according to EN ISO 354.

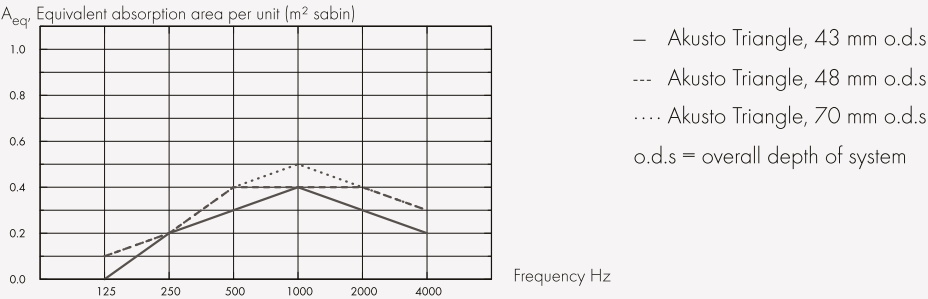

THK mm	o.d.s. mm	A _{eq} Equivalent absorption area per unit (m² sabin)					
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
40	43	0.0	0.2	0.3	0.4	0.3	0.2
40	48	0.1	0.2	0.4	0.4	0.4	0.3
40	70	0.1	0.2	0.4	0.5	0.4	0.3

Indoor Air Quality:

Certificate / Label	
Eurofins Indoor Air Comfort®	IAC Gold
French VOC	A+

Cradle to Cradle Certified®: Akusto products with Akutex FT surface are Cradle to Cradle Certified® at Bronze level (version 4.0).

Material Health: Akusto products with Akutex FT surface have received a C2C Certified Material Health Certificate™ at the Silver level (standard version 4.0). The C2C Certified Material Health Certificate™ is a verification of the health and safety of a product’s composition using the Material Health requirements of the Cradle-to-Cradle Certified Product Standard.

Carbon footprint: Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO ₂ equiv/m²
Akusto Triangle	1,06

Circularity: Minimum post-consumer recycled content: 60%, Recyclability: Fully recyclable,

Fire safety: The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. Europe: EN 13501-1, A2-s1,d0,

Humidity Resistance: Class C, relative humidity 95% and 30°C, according to EN 13964:2014

Visual appearance: Akusto Wall in white has high light reflectance. Light reflectance and nearest NCS colour sample for all the different colours: See Ecophon Colours and surfaces.

Cleanability: Akutex FT: Daily dusting and vacuum cleaning. Weekly wet wiping. For more info see Colours and surfaces.

Accessibility: The tiles are easily demountable except glued installation see quantity specification.

Installation: Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification. Rendered surfaces must have sufficient strength to be able to carry the load imposed by the tiles. If doubts, test gluing should be carried out. The surface should always be dry and clean. For best result the surface should be even, however an acceptable result could be achieved on slightly uneven surfaces.


Packaging information: Information is indicative and subject to change. 1039x1200x40 : 2,


System weight: Weight information is indicative and subject to variation. Akusto Triangle: 3,5,

Mechanical properties: No additional live load is allowed.

CE: Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.

Installation diagram in detail www.ecophon.com

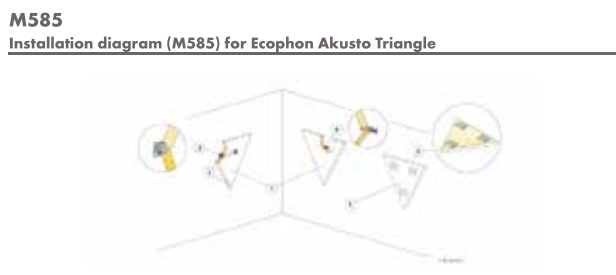




Ecophon Akusto™ Hexagon

Acoustic: The values in the diagram refer to a single unit.

Sound Absorption:
Based on test results according to EN ISO 354.

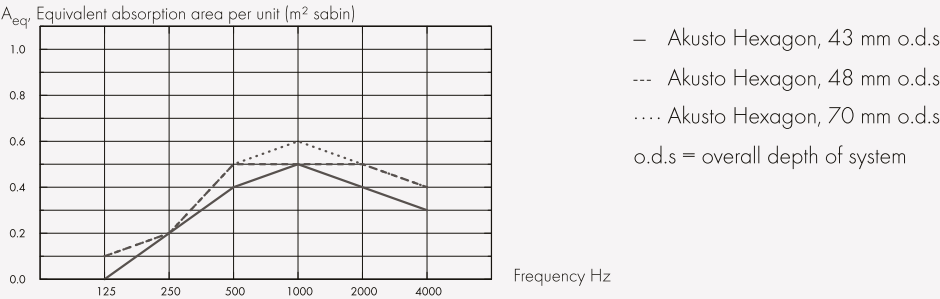

THK mm	o.d.s. mm	A _{eq} Equivalent absorption area per unit (m² sabin)					
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
40	43	0.0	0.2	0.4	0.5	0.4	0.3
40	48	0.1	0.2	0.5	0.5	0.5	0.4
40	70	0.1	0.2	0.5	0.6	0.5	0.4

Indoor Air Quality:

Certificate / Label	
Eurofins Indoor Air Comfort®	IAC Gold
French VOC	A+

Cradle to Cradle Certified®: Akusto products with Akutex FT surface are Cradle to Cradle Certified® at Bronze level (version 4.0).

Material Health: Akusto products with Akutex FT surface have received a C2C Certified Material Health Certificate™ at the Silver level (standard version 4.0). The C2C Certified Material Health Certificate™ is a verification of the health and safety of a product’s composition using the Material Health requirements of the Cradle-to-Cradle Certified Product Standard.

Carbon footprint: Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO ₂ equiv/m²
Akusto Hexagon	1,43

Circularity: Minimum post-consumer recycled content: 60%, Recyclability: Fully recyclable,

Fire safety: The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. Europe: EN 13501-1, A2-s1,d0,

Humidity Resistance: Class C, relative humidity 95% and 30°C, according to EN 13964:2014

Visual appearance: Akusto Wall in white has high light reflectance. Light reflectance and nearest NCS colour sample for all the different colours: See Ecophon Colours and surfaces.

Cleanability: Akutex FT: Daily dusting and vacuum cleaning. Weekly wet wiping. For more info see Colours and surfaces.

Accessibility: The tiles are easily demountable except glued installation see quantity specification.

Installation: Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification. Rendered surfaces must have sufficient strength to be able to carry the load imposed by the tiles. If doubts, test gluing should be carried out. The surface should always be dry and clean. For best result the surface should be even, however an acceptable result could be achieved on slightly uneven surfaces.

Packaging information: Information is indicative and subject to change. 1040x1200x40 : 2,


System weight: Weight information is indicative and subject to variation. Akusto Hexagon: 3,5,

Mechanical properties: No additional live load is allowed.

CE: Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.

Installation diagram in detail www.ecophon.com







Ecophon Akusto™ One

Acoustic: The values in the diagram refer to a single unit. If the units are arranged in a cluster with distances between units less than 0,5 meters, the Aeq per unit will be slightly reduced.

Sound Absorption:
Test results according to EN ISO 354.

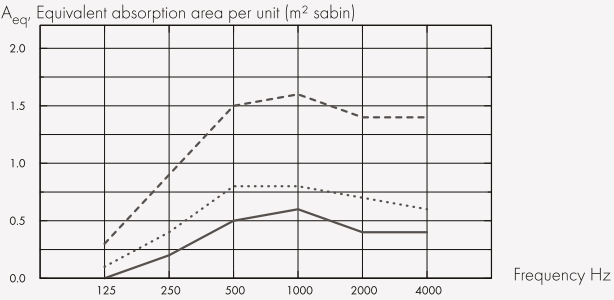

- Akusto One Ø592, 48 mm o.d.s.
 - Akusto One Ø792, 48 mm o.d.s.
 - Akusto One Ø1192, 48 mm o.d.s.
- o.d.s = overall depth of system

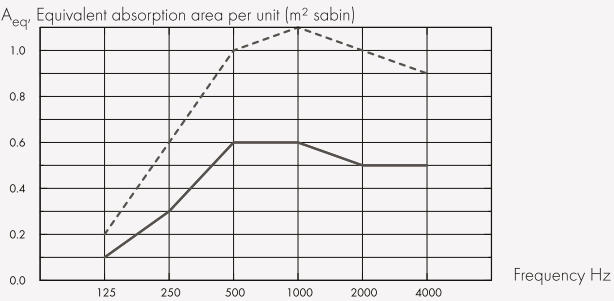

- Akusto One 592x592, 48 mm o.d.s.
 - Akusto One 1192x292, 48 mm o.d.s.
 - Akusto One 1192x592, 48 mm o.d.s.
- o.d.s = overall depth of system

	THK mm	o.d.s. mm	A _{eq} : Equivalent absorption area per unit (m ² sabin)					
			125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
Ø592	40	48	0.0	0.2	0.5	0.6	0.4	0.4
Ø792	40	48	0.1	0.4	0.8	0.8	0.7	0.6
Ø1192	40	48	0.3	0.9	1.5	1.6	1.4	1.4

	THK mm	o.d.s. mm	A _{eq} : Equivalent absorption area per unit (m ² sabin)					
			125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
592x592	40	48	0.1	0.3	0.6	0.6	0.5	0.5
1192x292	40	48	0.1	0.3	0.6	0.6	0.5	0.5
1192x592	40	48	0.2	0.6	1.0	1.1	1.0	0.9

Indoor Air Quality:

Certificate / Label	
Eurofins Indoor Air Comfort®	IAC Gold
French VOC	A+

Cradle to Cradle Certified®: Akusto products with Akutex FT surface are Cradle to Cradle Certified® at Bronze level (version 4.0).

Material Health: Akusto products with Akutex FT surface have received a C2C Certified Material Health Certificate™ at the Silver level (standard version 4.0). The C2C Certified Material Health Certificate™ is a verification of the health and safety of a product’s composition using the Material Health requirements of the Cradle-to-Cradle Certified Product Standard.

Carbon footprint: Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO ₂ equiv/m ²
Akusto One - Akutex FT	7,59
Akusto One - Texona	9,42

Circularity: Minimum post-consumer recycled content: 61%, Recyclability: Fully recyclable,

Fire safety: The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. Europe: EN 13501-1, A2-s1,d0,

Humidity Resistance: Class C, relative humidity 95% and 30°C, according to EN 13964:2014

Visual appearance: Akusto Wall in white has high light reflectance. Light reflectance and nearest NCS colour sample for all the different colours: See Ecophon Colours and surfaces.

Cleanability: Daily dusting, vacuum cleaning and weekly wet wiping (Akutex FT surfaces). Weekly dusting and vacuum cleaning (Texona surfaces).

Accessibility: The tiles are easily demountable except glued installation see quantity specification.

Installation: Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification.


Packaging information: Information is indicative and subject to change. Ø 592x40 : 2, 592x592x40 : 2, Ø 792x40 : 2, Ø 1192x40 : 2, 1192x292x0 : 2, 1192x592x40 : 2,

System weight: Weight information is indicative and subject to variation. Akusto One/Akutex FT: 3,5, Akusto One/Texona: 3,6, Akusto Freedom: 3,5,

Mechanical properties: No additional live load is allowed.


CE: Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.

Installation diagram in detail www.ecophon.com

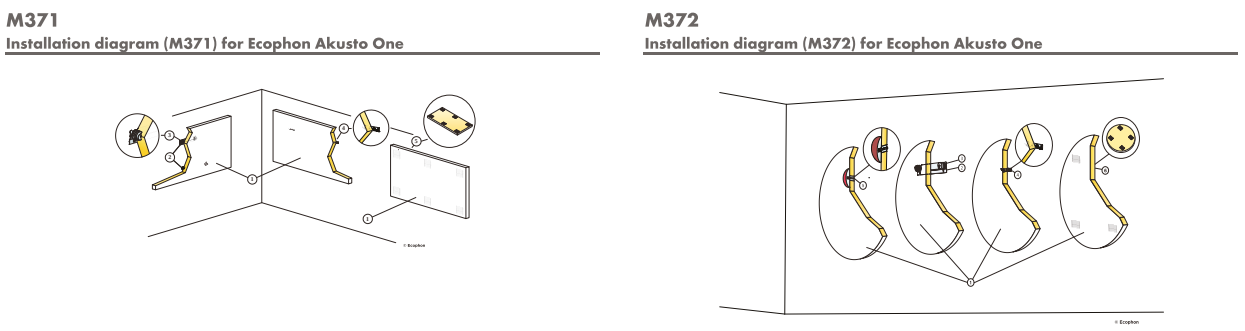




Ecophon Akusto™ Screen




Acoustic:

Sound Absorption:

Sound absorption and sound attenuation test results according to ISO 20189.

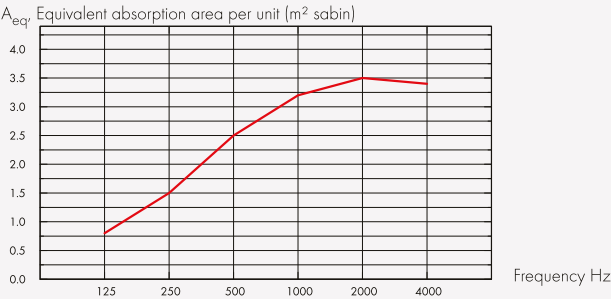

— Akusto Screen, size 1500x1200 mm
o.d.s = overall depth of system

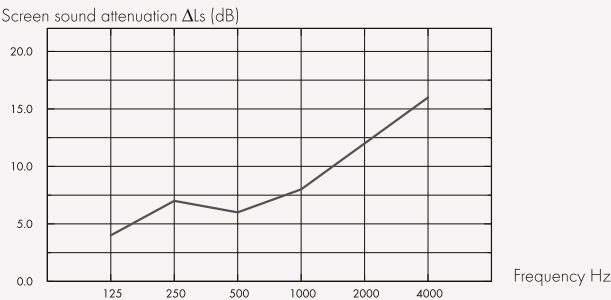

— Akusto Screen, size 1500x1200 mm
o.d.s = overall depth of system

	THK mm	A_{eq} : Equivalent absorption area per unit (m^2 sabin)					
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
1500x1200	40	0.8	1.5	2.5	3.2	3.5	3.4

	THK mm	Screen sound attenuation ΔL_s (dB)						Weighted screen sound attenuation (dB)
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	
1500x1200	40	4.0	7.0	6.0	8.0	12.0	16.0	10.0

Indoor Air Quality:

Certificate / Label

Eurofins Indoor Air Comfort® IAC Gold
French VOC A+

Circularity: *this value does not take into account the aluminium frame Minimum post-consumer recycled content: 48%*, Recyclability: Fully recyclable,

Humidity Resistance: Class A, relative humidity 70% and 25°C, according to EN 13964:2014

Visual appearance: Texona in white has high light reflectance. For more information regarding visual appearance of the various surfaces: See Ecophon Colours and surfaces.

Cleanability: Weekly dusting and vacuum cleaning.

Use of disinfectants: Texona Ginger, Sea salt, Thyme, Oyster and Garlic withstand the frequent use of ethanol (70%)-based disinfectants. Dampen a soft polyester microfiber cloth with the solution and wipe the surface in gentle circular movements.


Installation: Installed according to the installation guide that is delivered with the product.

Mechanical properties: The product is tested according to EN14073-2 and EN1023.

Installation diagram in detail www.ecophon.com

M564

Installation diagram (M564) for Ecophon Akusto Screen

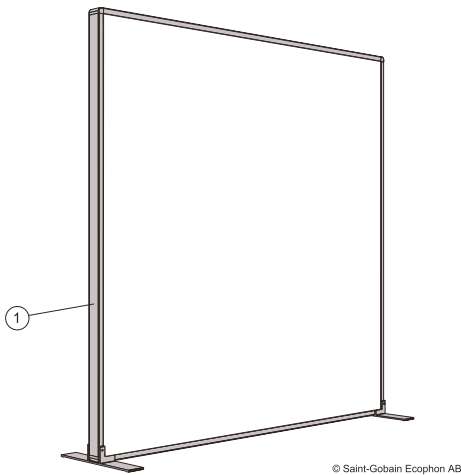

© Saint-Gobain Ecophon AB



Sustainability

Towards net-zero acoustics

Sustainability is more than a word – it’s a collective movement to protect people and the planet that requires honest commitment and genuine care. That’s why Ecophon is building on better materials, transparency, and principles, to name just a few.

We actively support an industry-wide drive to standardised, easy-access Environmental Product Declarations for individual products, rather than product families. Their inclusion of full lifecycle data,

from raw material sourcing to end of life, rather than only the favourable stages. A move away from self-declared labels, or non-independently verified sustainability claims. And for any promises of net zero carbon emission targets to be validated by the Science-Based Targets initiative.

If we’re going to build a sustainable future, it has to start with an honest approach, high ambition and the best of intentions – to build on better together.

Ecophon is the leading supplier of indoor acoustic solutions that improve working performance and quality of life. We believe in the difference sound can make to our everyday lives, and are passionate advocates for the importance of room acoustics to people's wellbeing – whatever the space, activity or need.

Having a sound effect on people is the principle that guides all we do. We're proud of the Swedish heritage and human approach that promise is founded on. Our uncompromising commitment to transparent sustainable practice. And, as members of the Saint-Gobain Group, to be doing our part in making the world a better home.



Saint-Gobain Ecophon AB
Box 500, SE-265 03 Hyllinge, Sweden
Phone: +46 (0)42 17 99 00
Fax: +46 (0)42 22 55 55
www.ecophon.com

SE556142516501 • Based in Åstorp

