



ECOPHON

**MASTER™**

*Taking care of demanding acoustics*

# A sound effect on people

Saint-Gobain Ecophon contributes to good indoor environments for working, healing and learning. We do this by developing, manufacturing, and delivering acoustic products and systems designed around the natural evolution of human hearing - replicating the outdoor sound experience indoors, because that's just better for people. Having a sound effect on people, in every way we can, is what we do proudly. That promise makes every one of us a passionate advocate for the importance of room acoustics to people's wellbeing - whatever the space, activity or need.



## Table of contents

Good acoustics matter everywhere .....	6
Ecophon Master™ .....	8
Ecophon Master™ product range .....	10
Master A .....	10
Master B .....	10
Master Ds .....	10
Master E .....	10
Master Eg .....	11
Master SQ .....	11
Master F .....	11
Master Rigid A .....	11
Master Rigid E .....	12
Master Rigid Dp .....	12
Colours and surfaces .....	14
Ecophon Master™ overview .....	16
Products system and properties .....	24
Towards net-zero acoustics .....	50

Any picture, description, illustration and dimensions contained in this brochure is for information purpose only and is not contractual. This brochure shows Ecophon products and may contain third-party's products. Ecophon shall not be liable for any misprint. Ecophon reserves the right to change product specifications at any time without prior notice. Recommendations of use and installation/assembly, as well as storage, maintenance, and indoor environment conditions, must always be respected. Please refer to the applicable technical documentation, such as technical data sheet and installation guidelines. For a comprehensive and up-to-date library of information, including the last version of applicable General Terms and Conditions of Sales, please visit [www.ecophon.com](http://www.ecophon.com)

©Saint-Gobain Ecophon AB, 2026-04-09



## Good acoustics matter everywhere

The importance of acoustics is underappreciated. Sound impacts us in daily life, and the scientific support for improving our indoor sound environments is well documented.

And what exactly is an ideal indoor sound environment for people? One based on how we experience sound outside. The human auditory sense is naturally adapted to an outdoor environment where there is not any sound reflections from ceilings and walls.

That's why most of what we do at Ecophon is about replicating the acoustic qualities found in nature for indoor environments. We want to optimise indoor spaces to our natural way of hearing, so that speech and sound are easy to hear and understand, when needed, improving performance and wellbeing.

Usually, that starts with the ceiling. A wall-to-wall acoustic ceiling is the easiest way to get a large sound-absorbing surface area into a space, and is usually the best way to reduce sound strength, shorten reverberation times, and increase speech clarity and overall hearing comfort.




## ECOPHON **MASTER™**

### Taking care of demanding acoustics

Ecophon Master™ is at the forefront of acoustic innovation and unrivalled in meeting acoustically challenging environments. The result provides excellent sound absorption and speech intelligibility.

Environments with frequent phone use or high ambient noise levels can make it difficult to concentrate, stay productive or learn effectively. Master suspended ceiling systems provide exceptional sound absorption and speech clarity – perfect for busy offices, classrooms, or anywhere speech intelligibility is the priority.

- Absorption class A
- Offers 2 different product systems with 8 different edges
- Premium surface with matte look

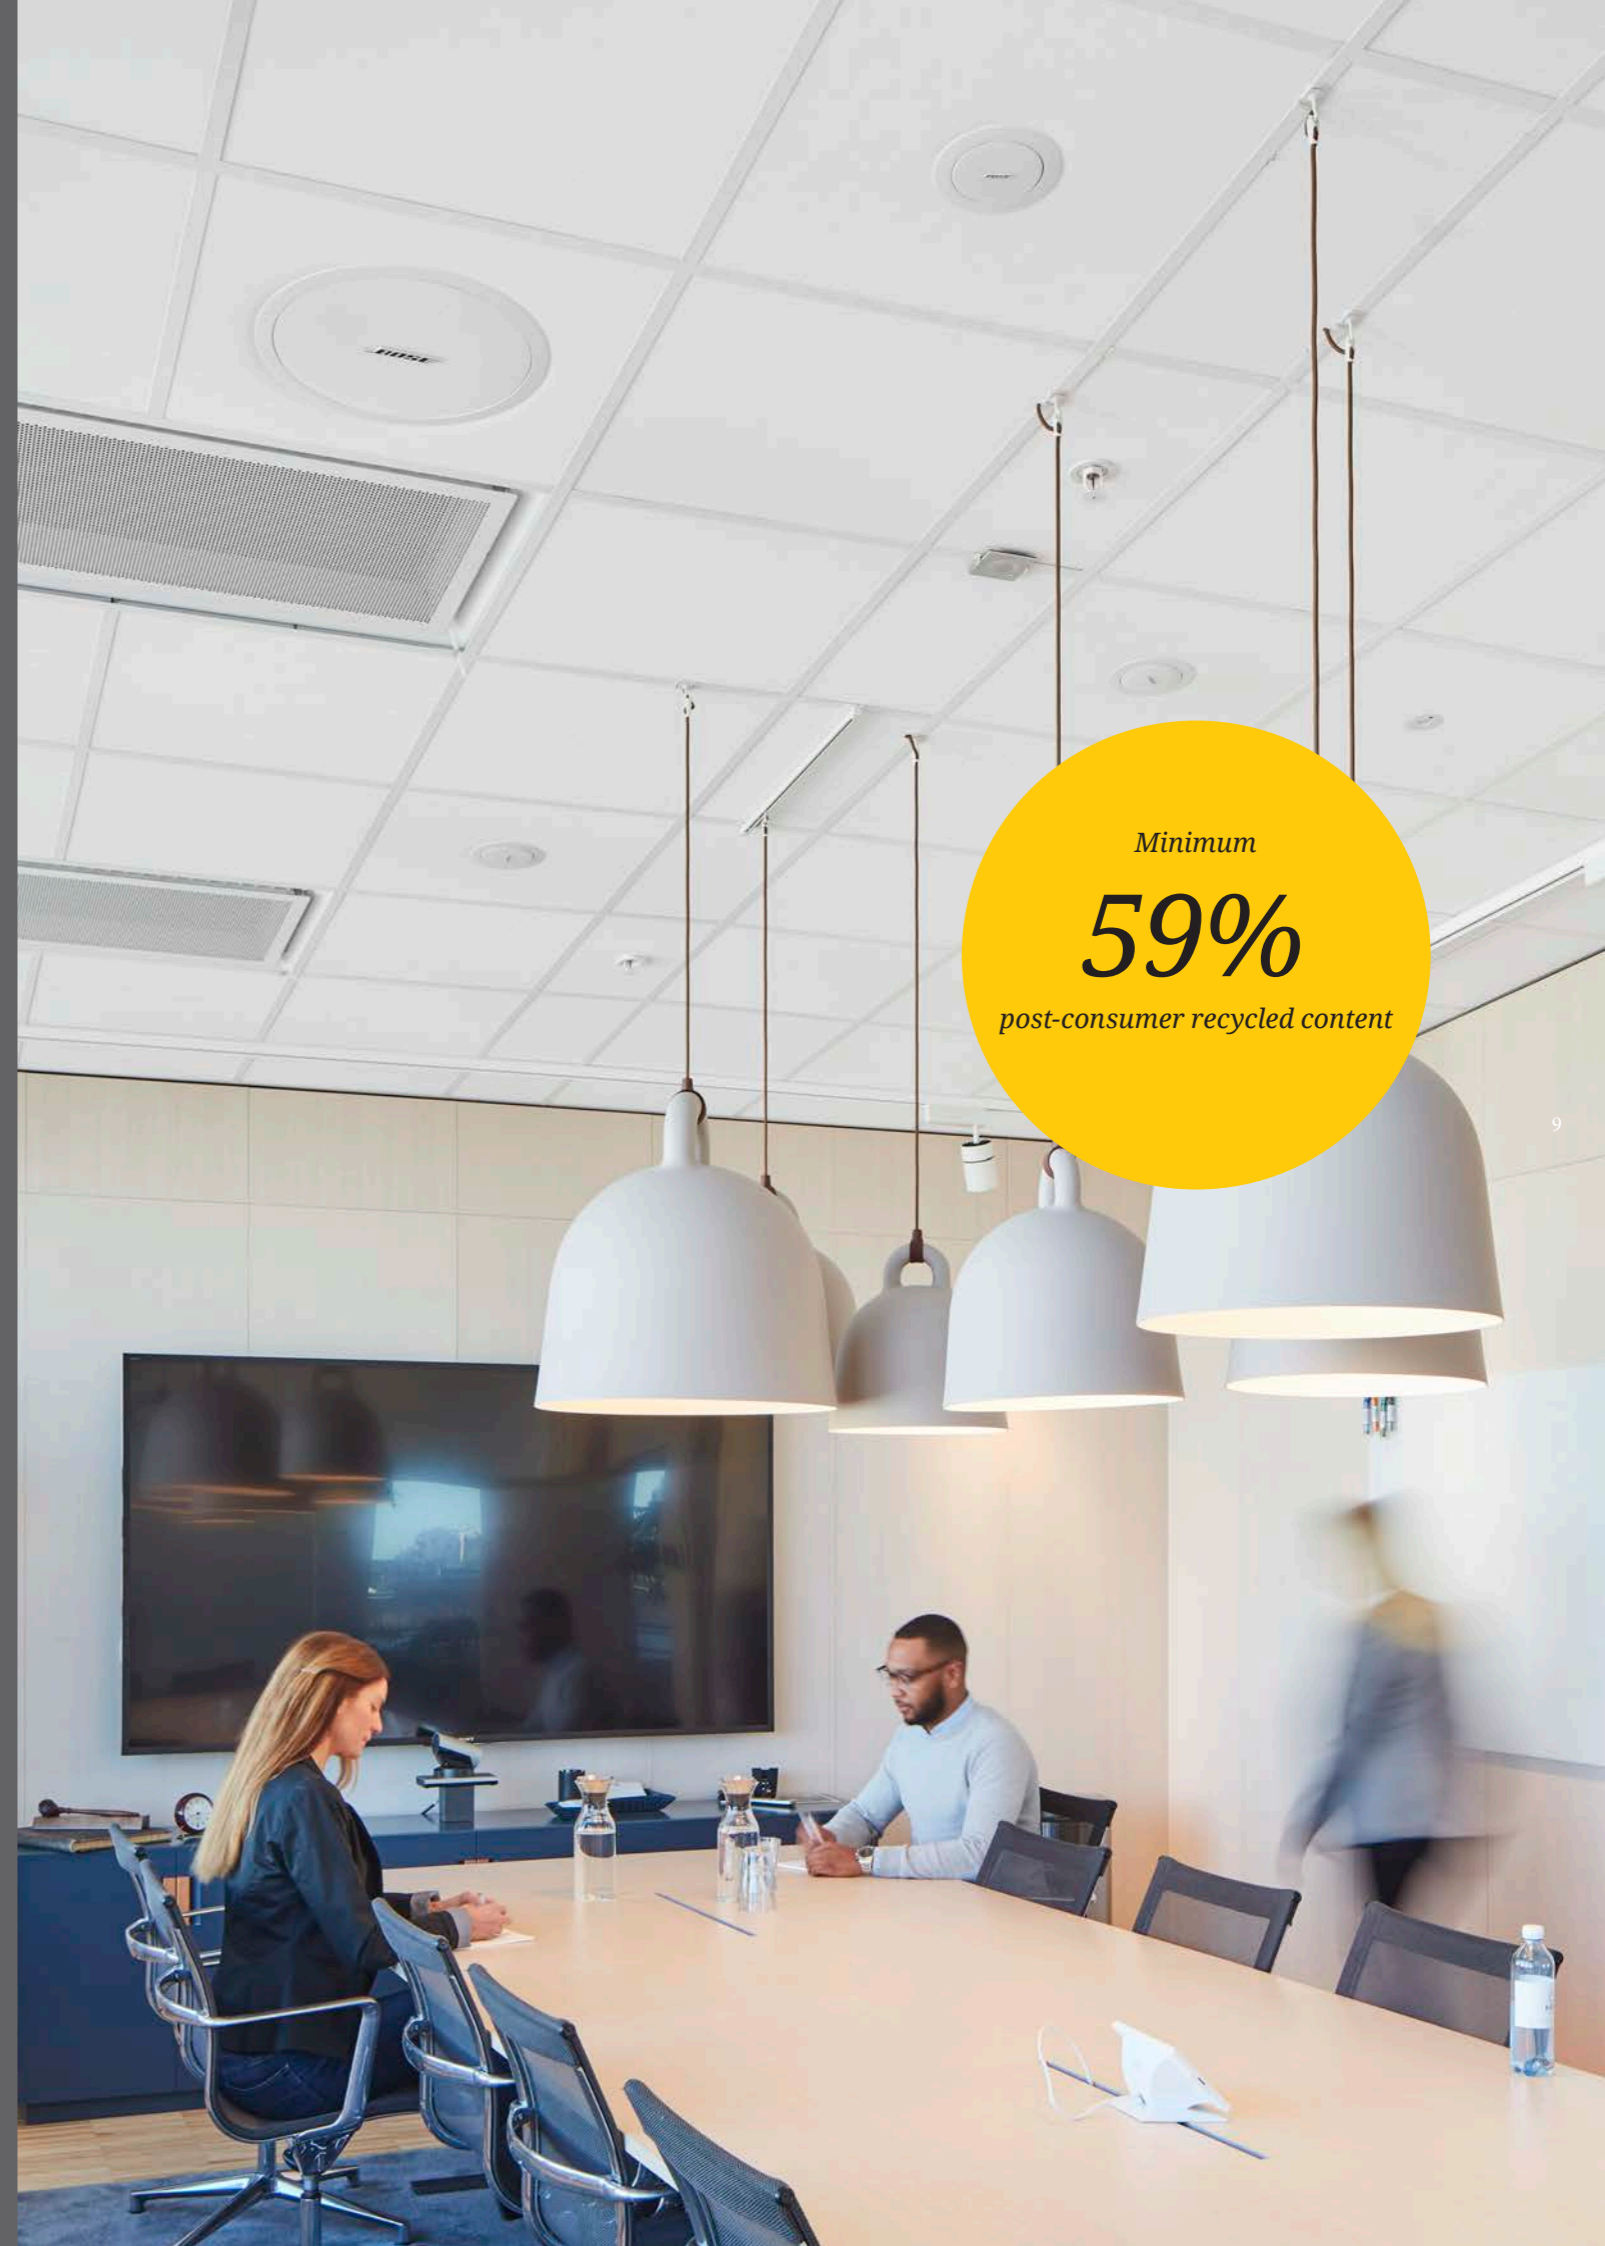


Minimum  
**59%**  
post-consumer recycled content

# Product range

## ECOPHON MASTER™


Ecophon Master™ is a suspended wall-to-wall ceiling system with excellent acoustic properties. It also offers direct-fixing solutions with screws or adhesive for a quick and easy acoustic upgrade. Patent-pending Master Eg is a unique system offering design possibilities with a floating appearance. Master Rigid systems have a reinforced, durable and impact-resistant surface and is secured in the grid system. Combine with Ecophon Extra Bass for extra low-frequency absorption.

### ECOPHON MASTER™ A

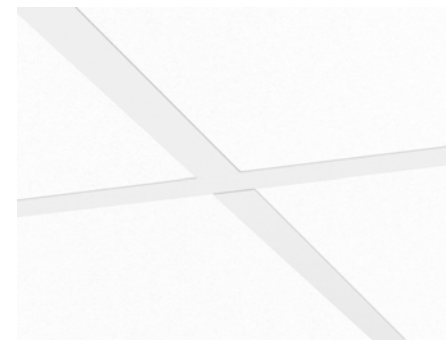

Measurements	Installation method
600x600x40	Suspended ceiling
1200x600x40	Suspended ceiling
1200x1200x40	Suspended ceiling

### ECOPHON MASTER™ B

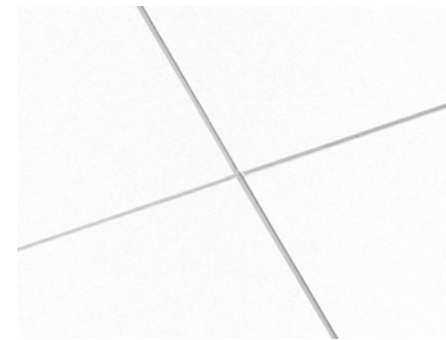


Measurements	Installation method
600x600x40	Glued
1200x600x40	Glued

### ECOPHON MASTER™ Ds




Measurements	Installation method
600x600x40	Suspended ceiling

### ECOPHON MASTER™ E

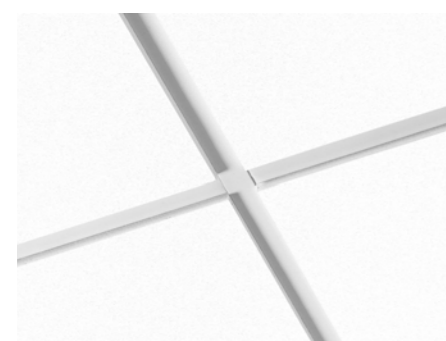


Measurements	Installation method
600x600x40	Suspended ceiling
1200x600x40	Suspended ceiling
1200x1200x40	Suspended ceiling

### ECOPHON MASTER™ Eg

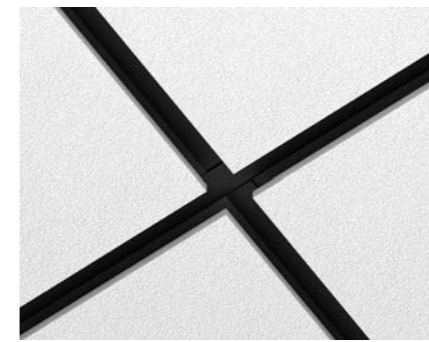


Measurements	Installation method
600x600	Suspended ceiling
1200x600	
1200x1200	
2400x600	

### ECOPHON MASTER™ F

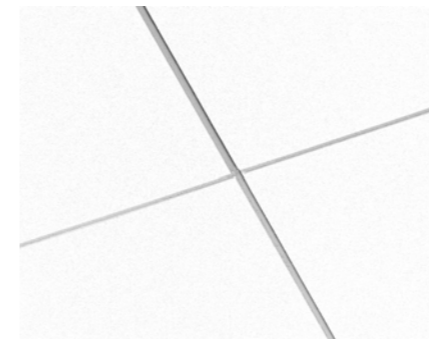

Measurements	Installation method
600x600x40	Screwed
1200x600x40	Screwed

### ECOPHON MASTER™ SQ

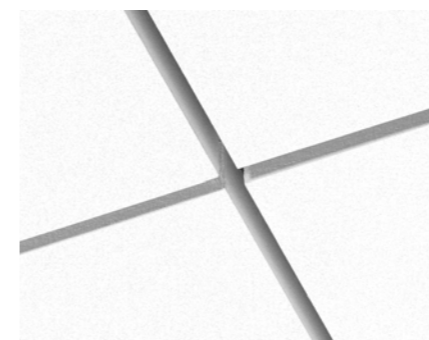


Measurements	Installation method
600x600x40	Glued
1200x600x40	Glued

### ECOPHON MASTER™ RIGID A



Measurements	Installation method
600x600x20	Suspended ceiling
1200x600x20	Suspended ceiling
1600x600x20	Suspended ceiling
1800x600x20	Suspended ceiling
2000x600x20	Suspended ceiling
2400x600x20	Suspended ceiling

ECOPHON MASTER™ RIGID E

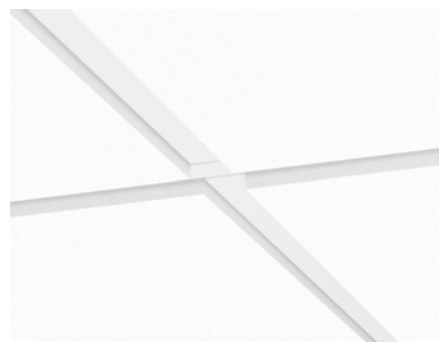


Measurements	Installation method
600x600x20	Suspended ceiling
1200x600x20	Suspended ceiling
1200x1200x20	Suspended ceiling

ECOPHON MASTER™ RIGID Dp



Measurements	Installation method
600x600x20	Suspended ceiling
1200x600x20	Suspended ceiling

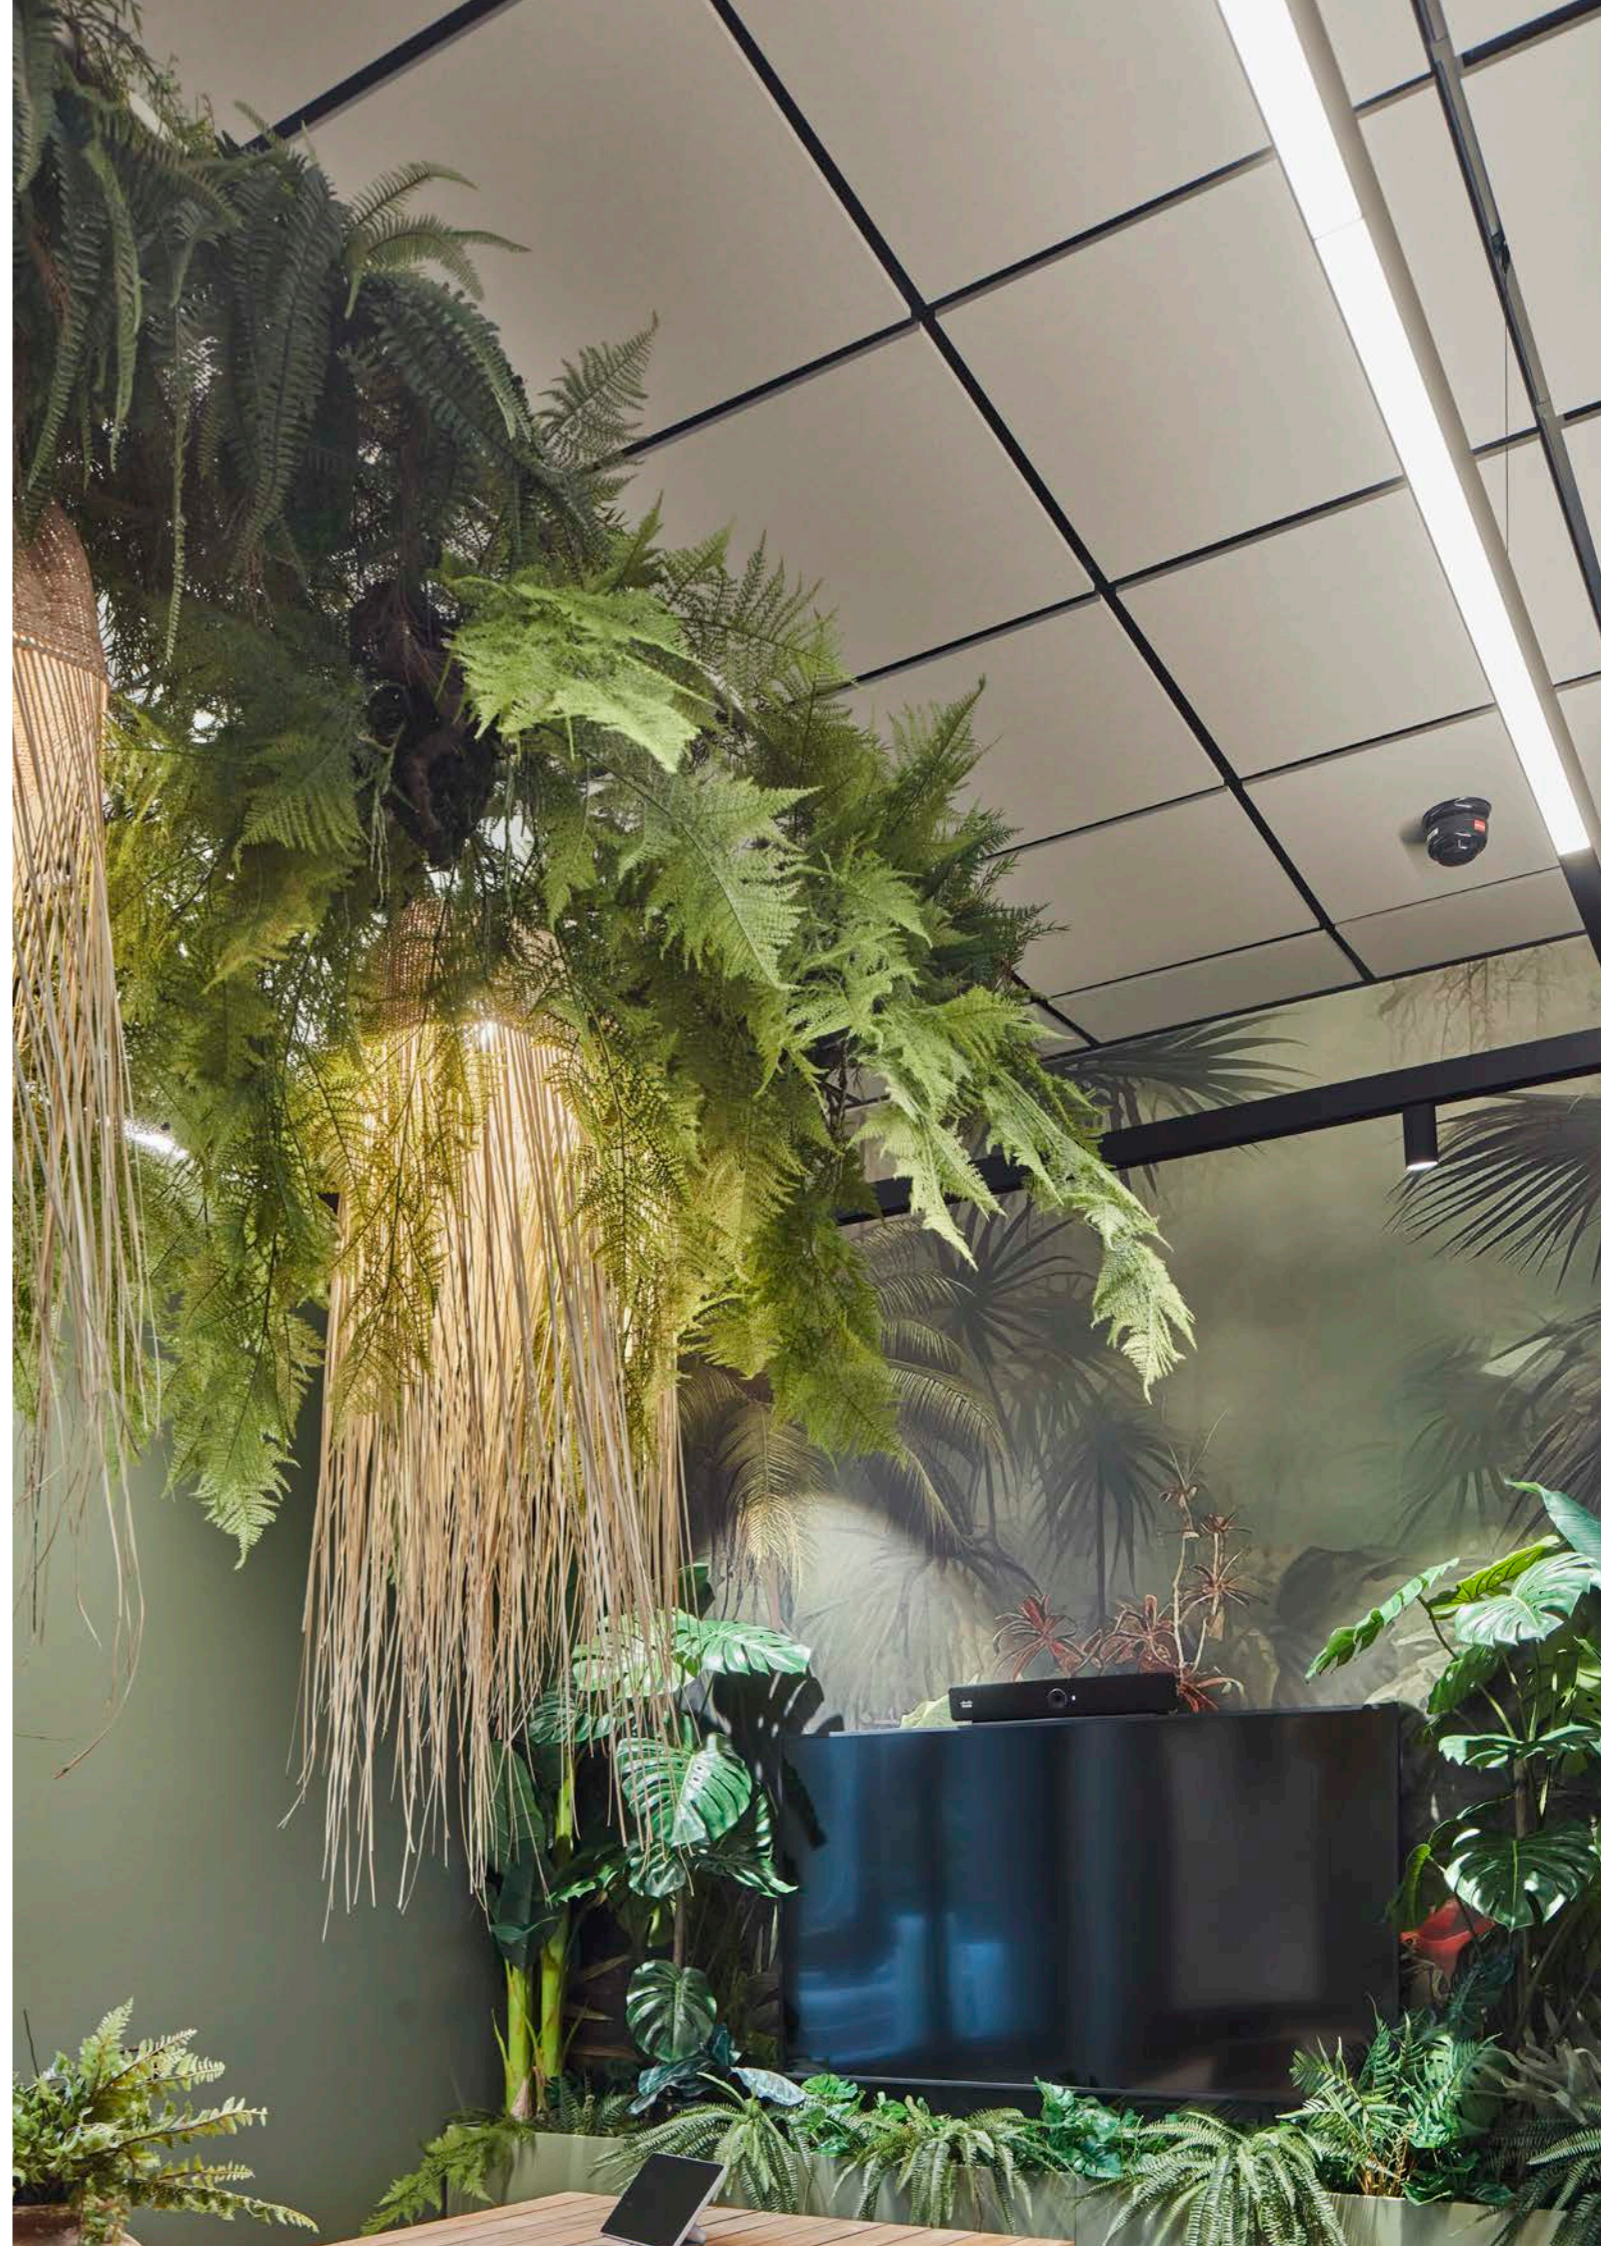

# Colours and surfaces

## Akutex™ FT

The Akutex™ FT surface features a refined pore structure that enables the glass wool core to provide optimal sound absorption. The standard collection includes 16 colours, complemented by a wide range of NCS colours, offering design flexibility and the opportunity to tailor the acoustic solution.



				
<b>White Frost</b> Light reflectance: 85%. Nearest NCS colour sample: S 0500-N.	<b>Dark Diamond</b> Light reflectance: 4%. Nearest NCS colour sample: S 9000-N.	<b>Basalt Rock</b> Light reflectance: 7%. Nearest NCS colour sample: S 8005-B20G.	<b>Deep Sea</b> Light reflectance: 10%. Nearest NCS colour sample: S 7010-R90B.	<b>Pine Green</b> Light reflectance: 11%. Nearest NCS colour sample: S 7010-B90G.
				
<b>Dark Chestnut</b> Light reflectance: 10%. Nearest NCS colour sample: S 7010-Y90R.	<b>Silk Slate</b> Light reflectance: 13%. Nearest NCS colour sample: S 7000-N.	<b>Silver Stone</b> Light reflectance: 29%. Nearest NCS colour sample: S 4502-Y.	<b>Spring Leaf</b> Light reflectance: 30%. Nearest NCS colour sample: S 4010-G50Y.	<b>Wet Sand</b> Light reflectance: 34%. Nearest NCS colour sample: S 3020-Y30R.
				
<b>Silent Steam</b> Light reflectance: 50%. Nearest NCS colour sample: S 2010-B.	<b>Sage Mist</b> Light reflectance: 52%. Nearest NCS colour sample: S 2005-G50Y.	<b>Volcanic Ash</b> Light reflectance: 55%. Nearest NCS colour sample: S 2002-Y.	<b>Cloudy Day</b> Light reflectance: 64%. Nearest NCS colour sample: S 1500-N.	<b>Morning Rain</b> Light reflectance: 70%. Nearest NCS colour sample: S 1002-B.
				
<b>Scallop Shells</b> Light reflectance: 75%. Nearest NCS colour sample: S 0804-Y50R.				

**Note**  
Colours may vary slightly between different production batches. The actual product colour may differ from the visual reference.






## Grid colours - create your own design

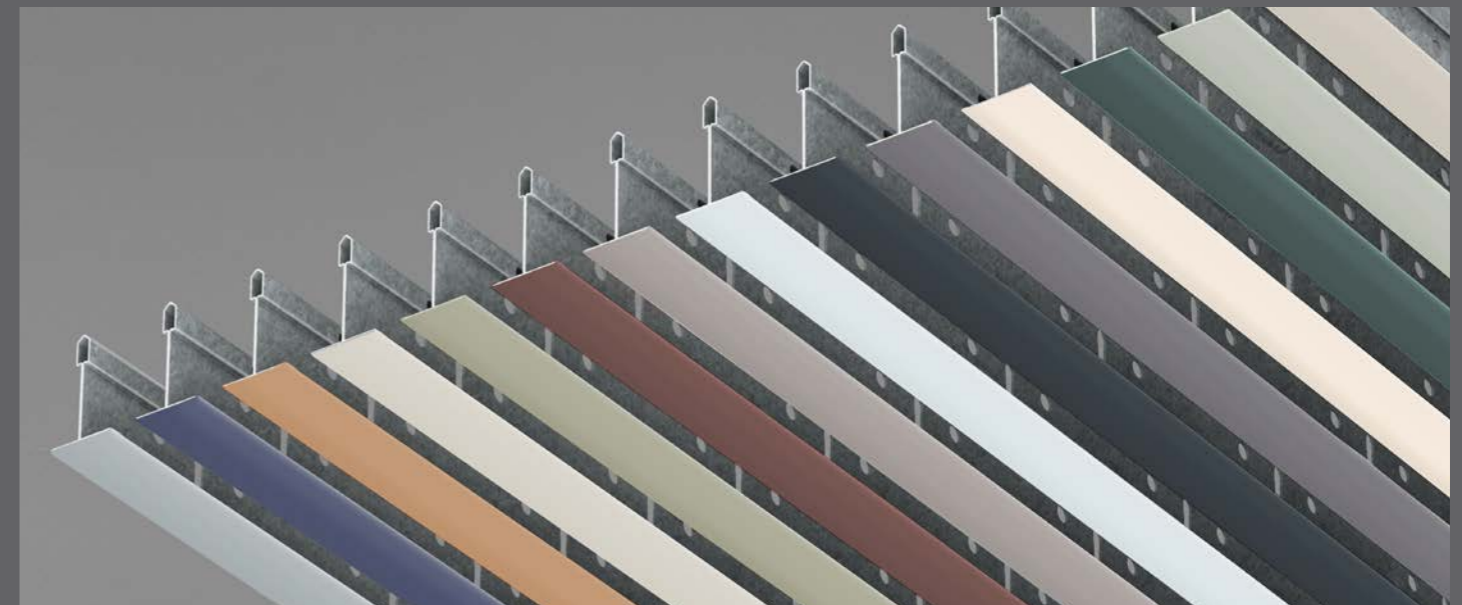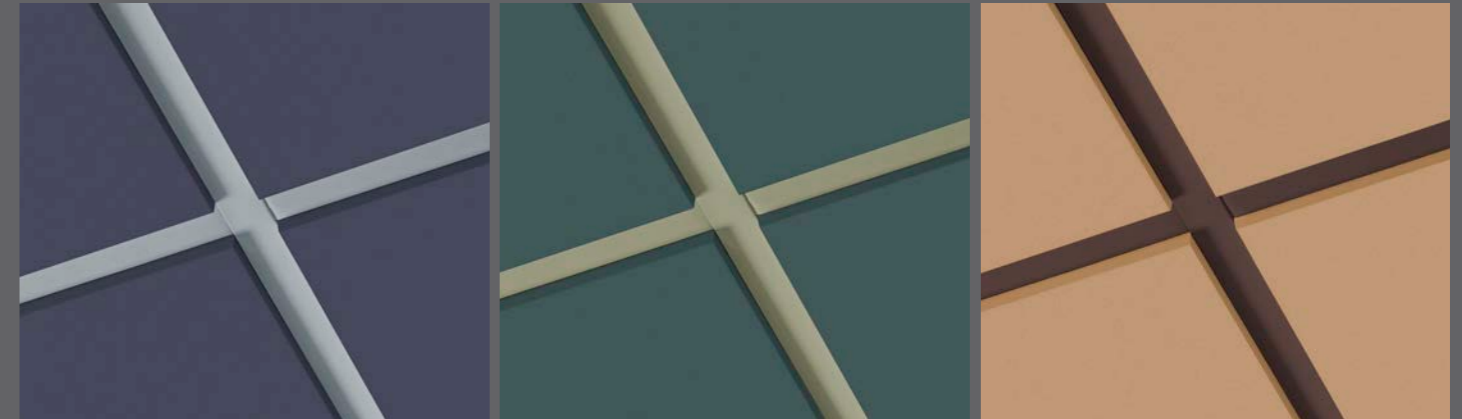An acoustic ceiling is often the largest continuous surface in a room. It will affect not only the entire look and feel of the interior, but also the end-users' wellbeing.

- Connect grids are available in all Akutex™ FT colour codes.
- The closest Akutex™ FT colour match creates a subtle pattern, and combining Akutex™ FT colours enhances the overall design expression.



# Ecophon Master™ overview

Edge design	Product	Absorption class	Connect grid	Size (mm)	Possible combinations
	Ecophon Master™ A	A	T15/ T24	600x600x40 1200x600x40 1200x1200x40	-
	Ecophon Master™ B	A	Direct fixing	600x600x40 1200x600x40	-
	Ecophon Master™ Ds	A	T24	600x600x40	-
	Ecophon Master™ E	A	T24	600x600x40 1200x600x40 1200x1200x40	-
	Ecophon Master™ Eg	A	T24	600x600 1200x600 1200x1200 2400x600	-
	Ecophon Master™ F	A	Direct fixing	600x600x40 1200x600x40	-
	Ecophon Master™ SQ	A	Direct fixing	600x600x40 1200x600x40	-
	Ecophon Master™ Rigid A	A	T24	600x600x20 1200x600x20 1600x600x20 1800x600x20 2000x600x20 2400x600x20	Extra Bass 1200x600
	Ecophon Master™ Rigid E	A	T24	600x600x20 1200x600x20 1200x1200x20	Extra Bass 1200x600
	Ecophon Master™ Rigid Dp	A	T24	600x600x20 1200x600x20	Extra Bass 1200x600




Ecophon Master panels contribute to a healthy indoor environment with superior acoustic absorption, low VOC emissions in line with the strict requirements, and a full chemical transparency with verified Health Product Declarations. The low environmental footprint of our Master panels is third-party verified in Environmental Product Declarations.


The products do not contribute to fire and the glass wool core of the Master tiles is tested and classified as non-combustible according to EN ISO 1182. Fire classification according to EN 13501-1, see Technical Properties on respectively product.

**Note**


More product and system information such as installation help and sustainability documentation can be found at [www.ecophon.com](http://www.ecophon.com)

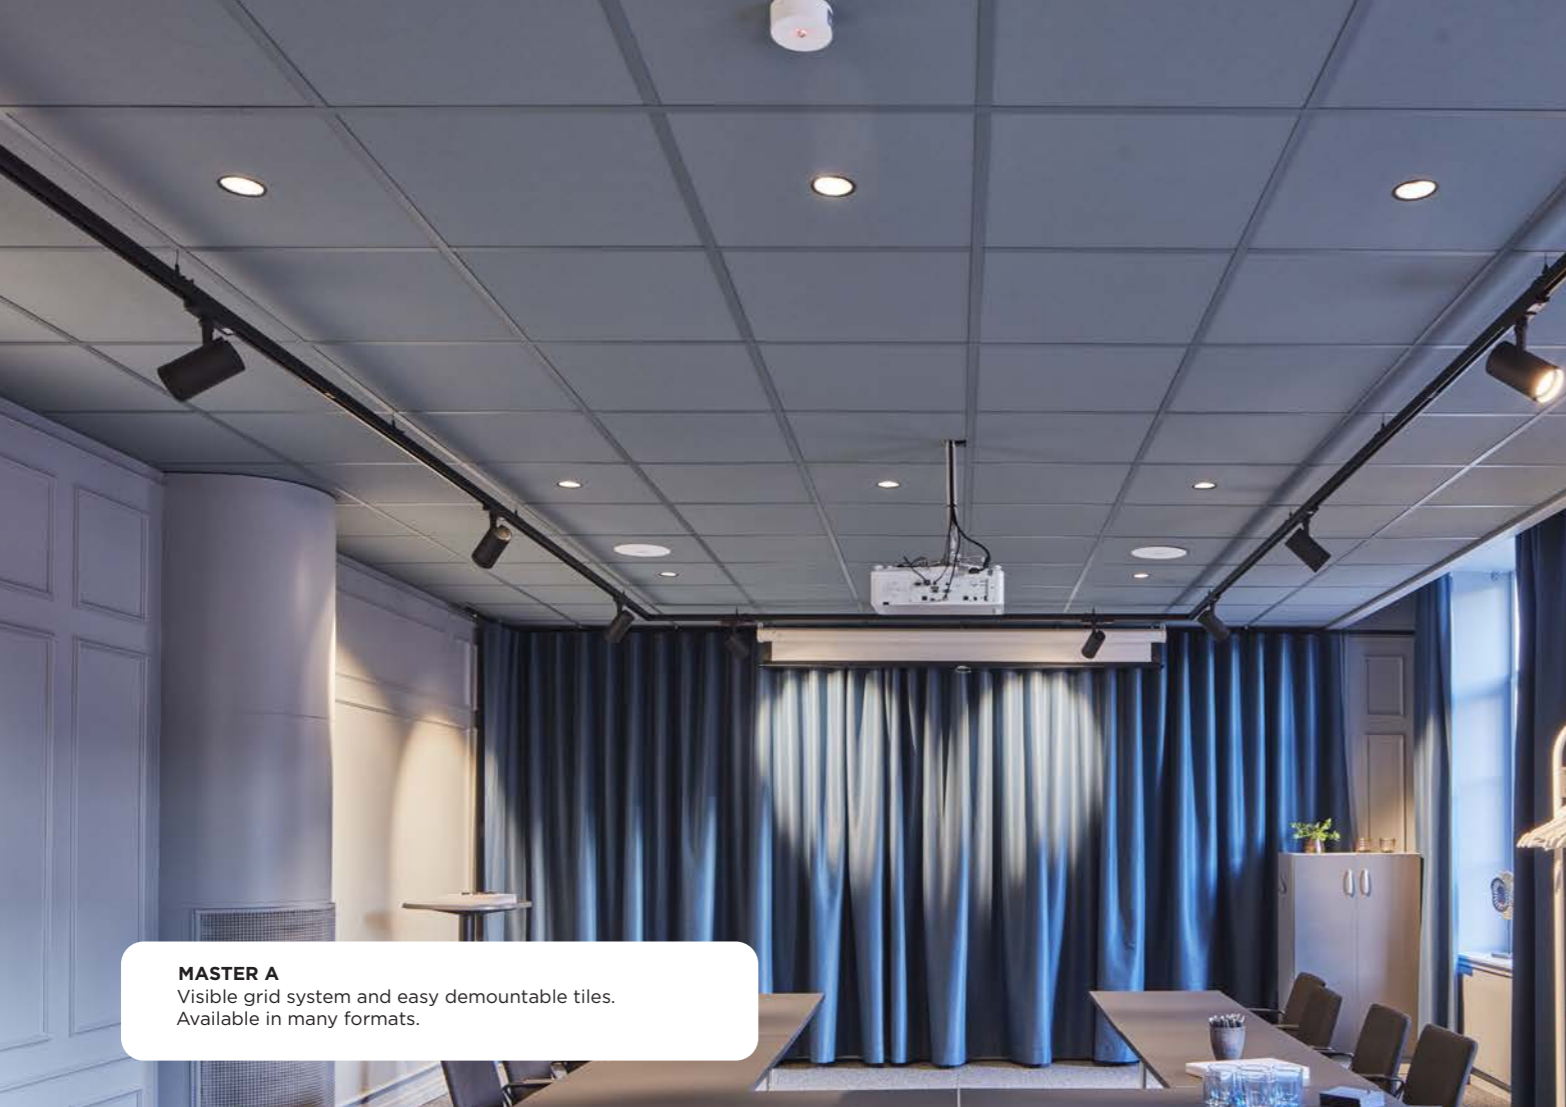


**MASTER A**  
Visible grid system and easy demountable tiles.  
Available in many formats.

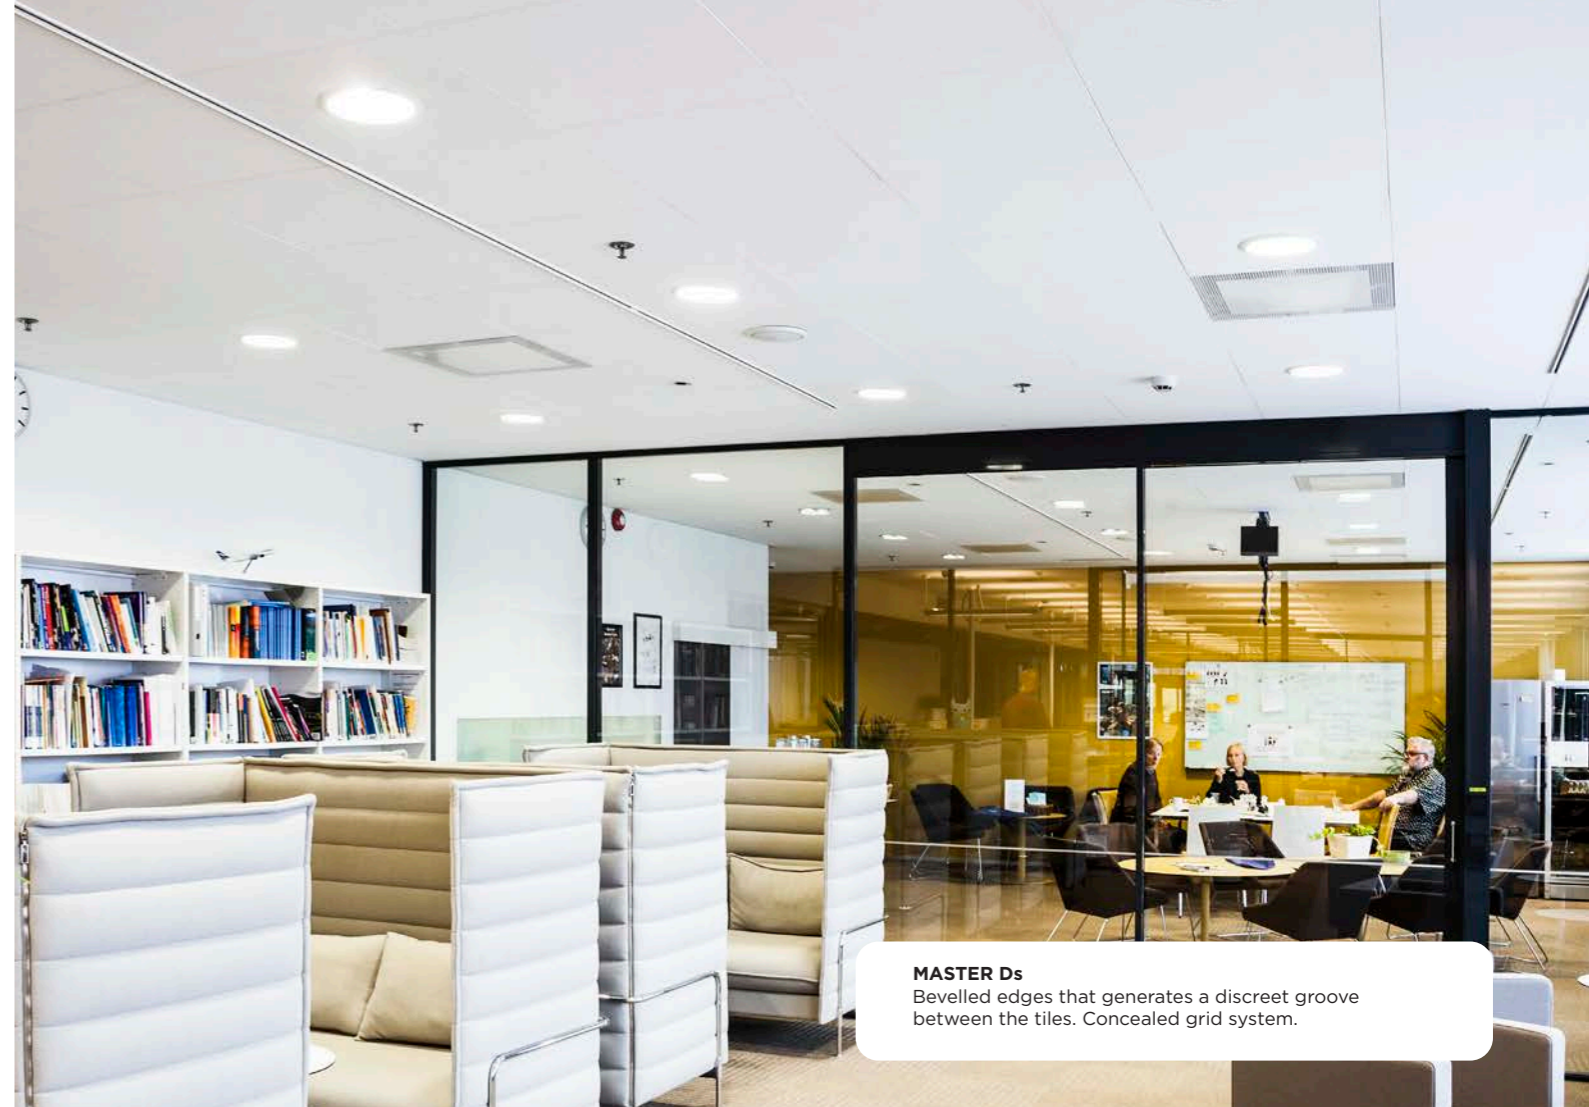

**MASTER Ds**  
Bevelled edges that generates a discreet groove  
between the tiles. Concealed grid system.

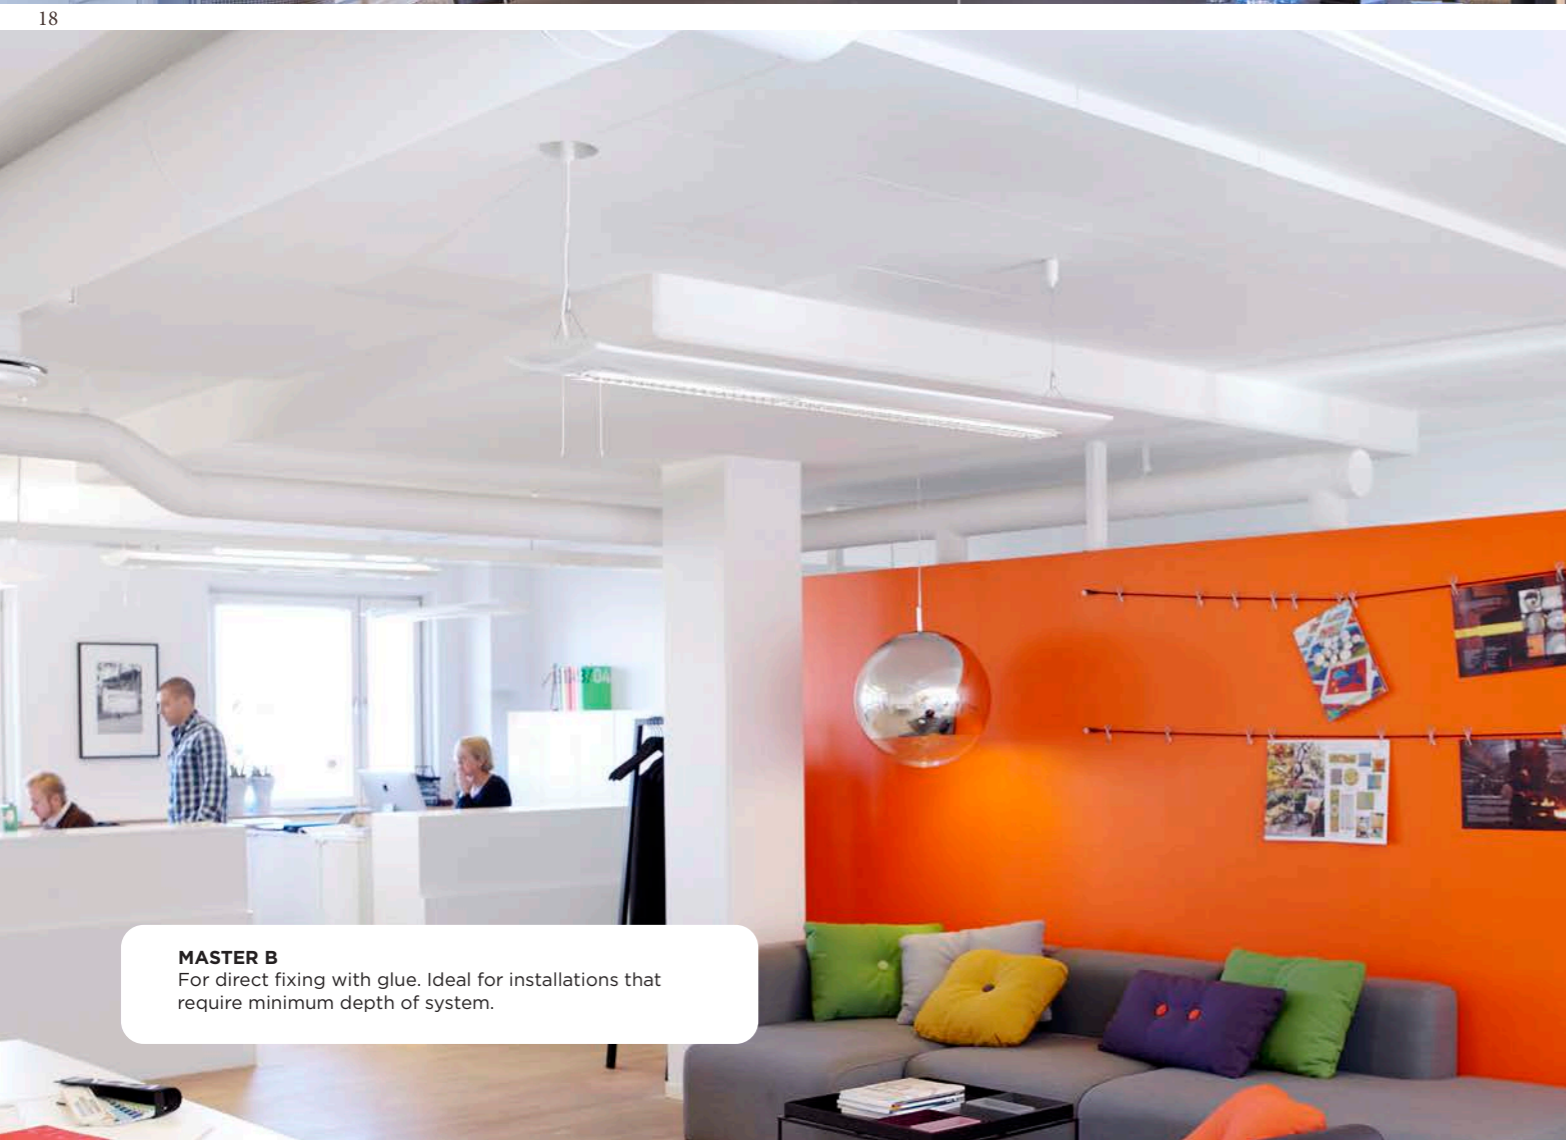

**MASTER B**  
For direct fixing with glue. Ideal for installations that  
require minimum depth of system.

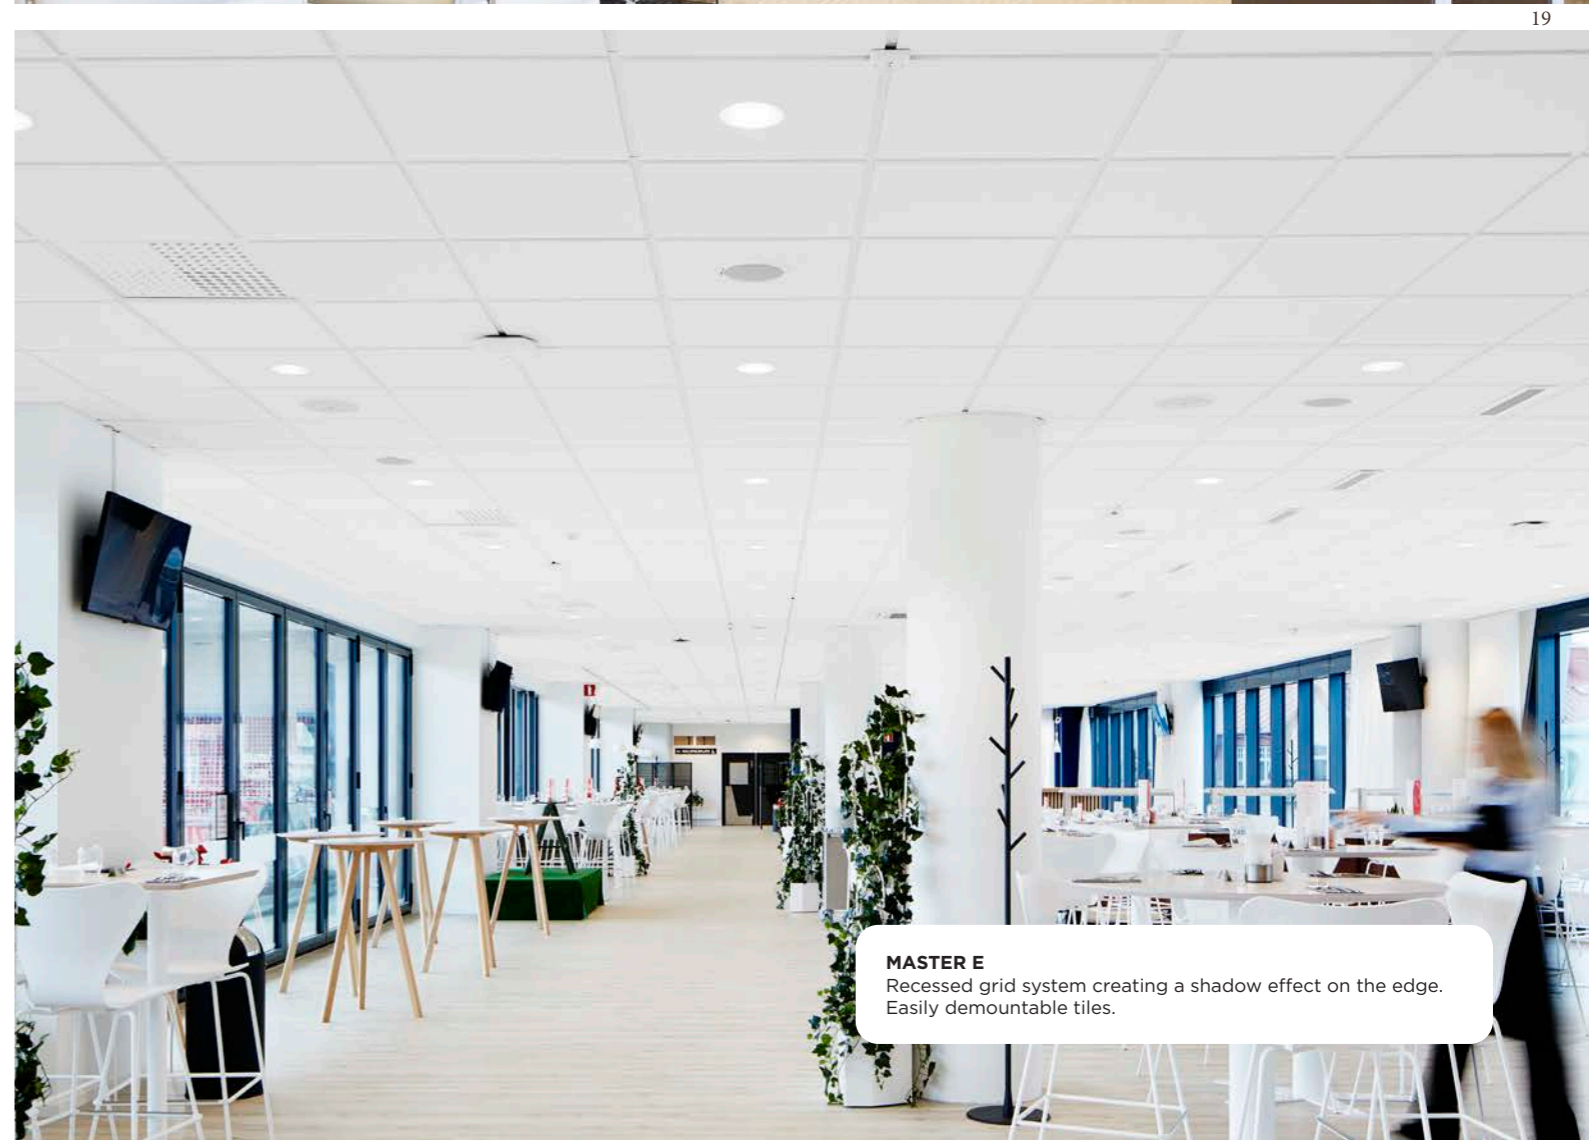


**MASTER E**  
Recessed grid system creating a shadow effect on the edge.  
Easily demountable tiles.




**MASTER Eg**  
Unique edge design painted in two colours with concealed support edges and a floating appearance.




**MASTER SQ**  
For direct fixing with glue. Installed with a gap between each tile.

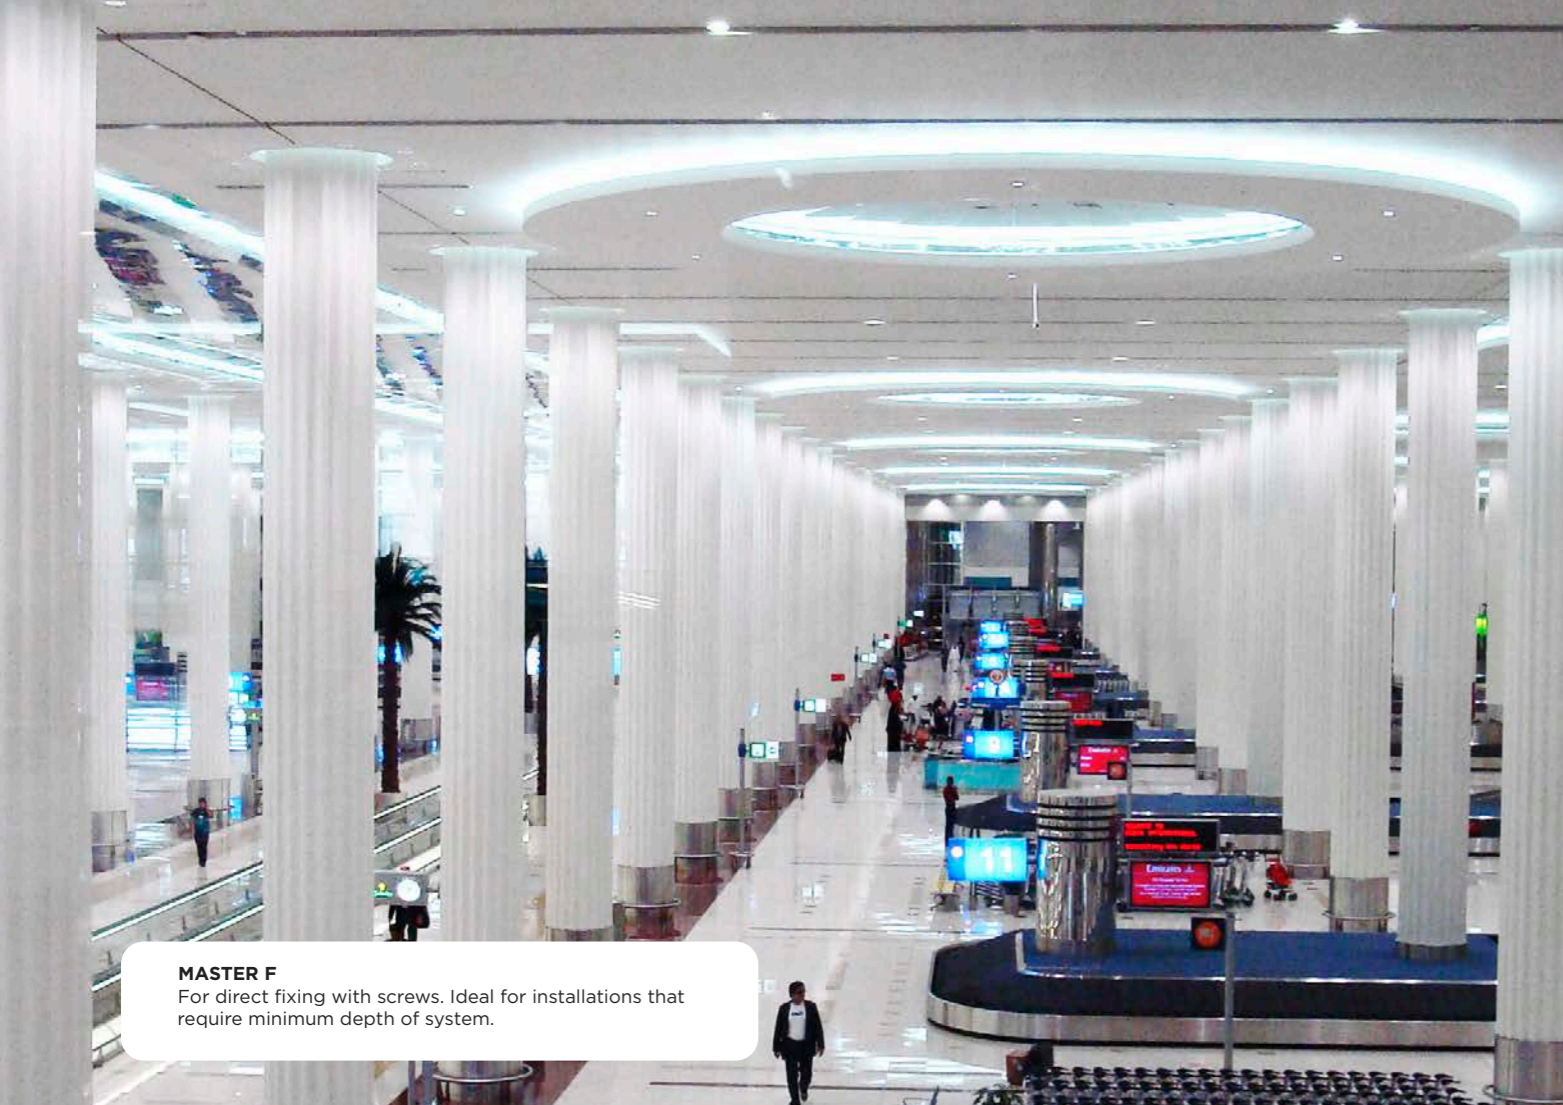


**MASTER F**  
For direct fixing with screws. Ideal for installations that require minimum depth of system.

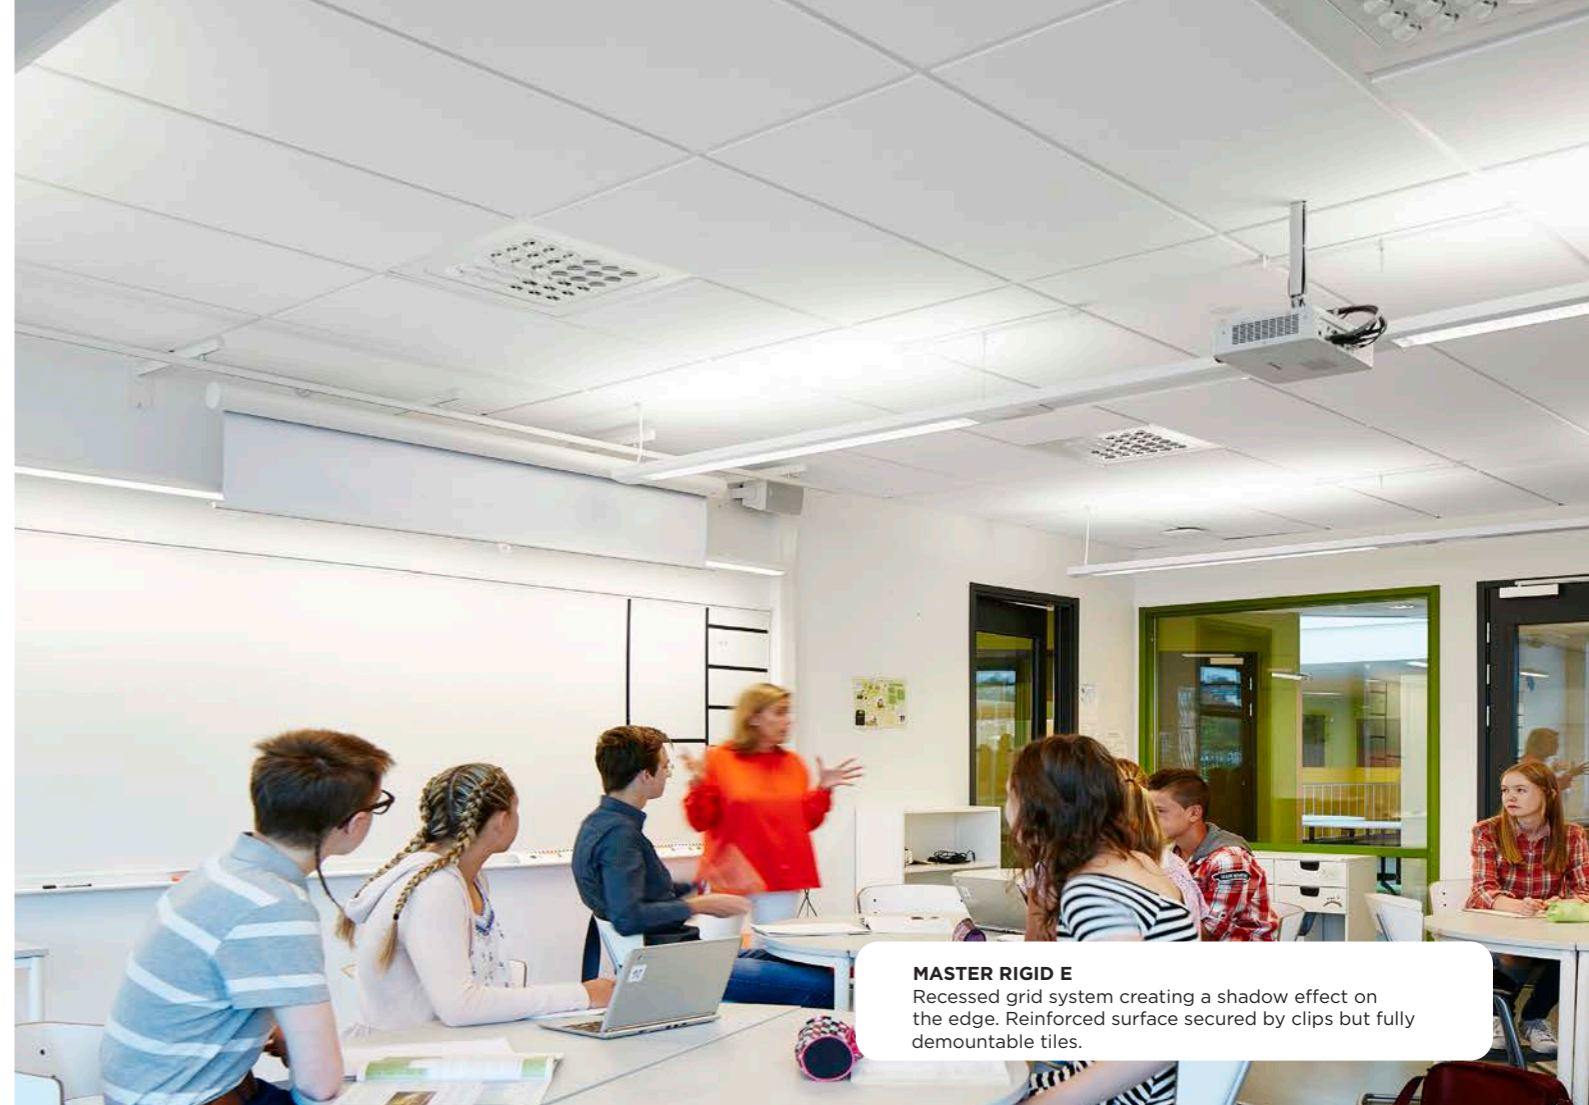

**MASTER RIGID E**  
Recessed grid system creating a shadow effect on the edge. Reinforced surface secured by clips but fully demountable tiles.

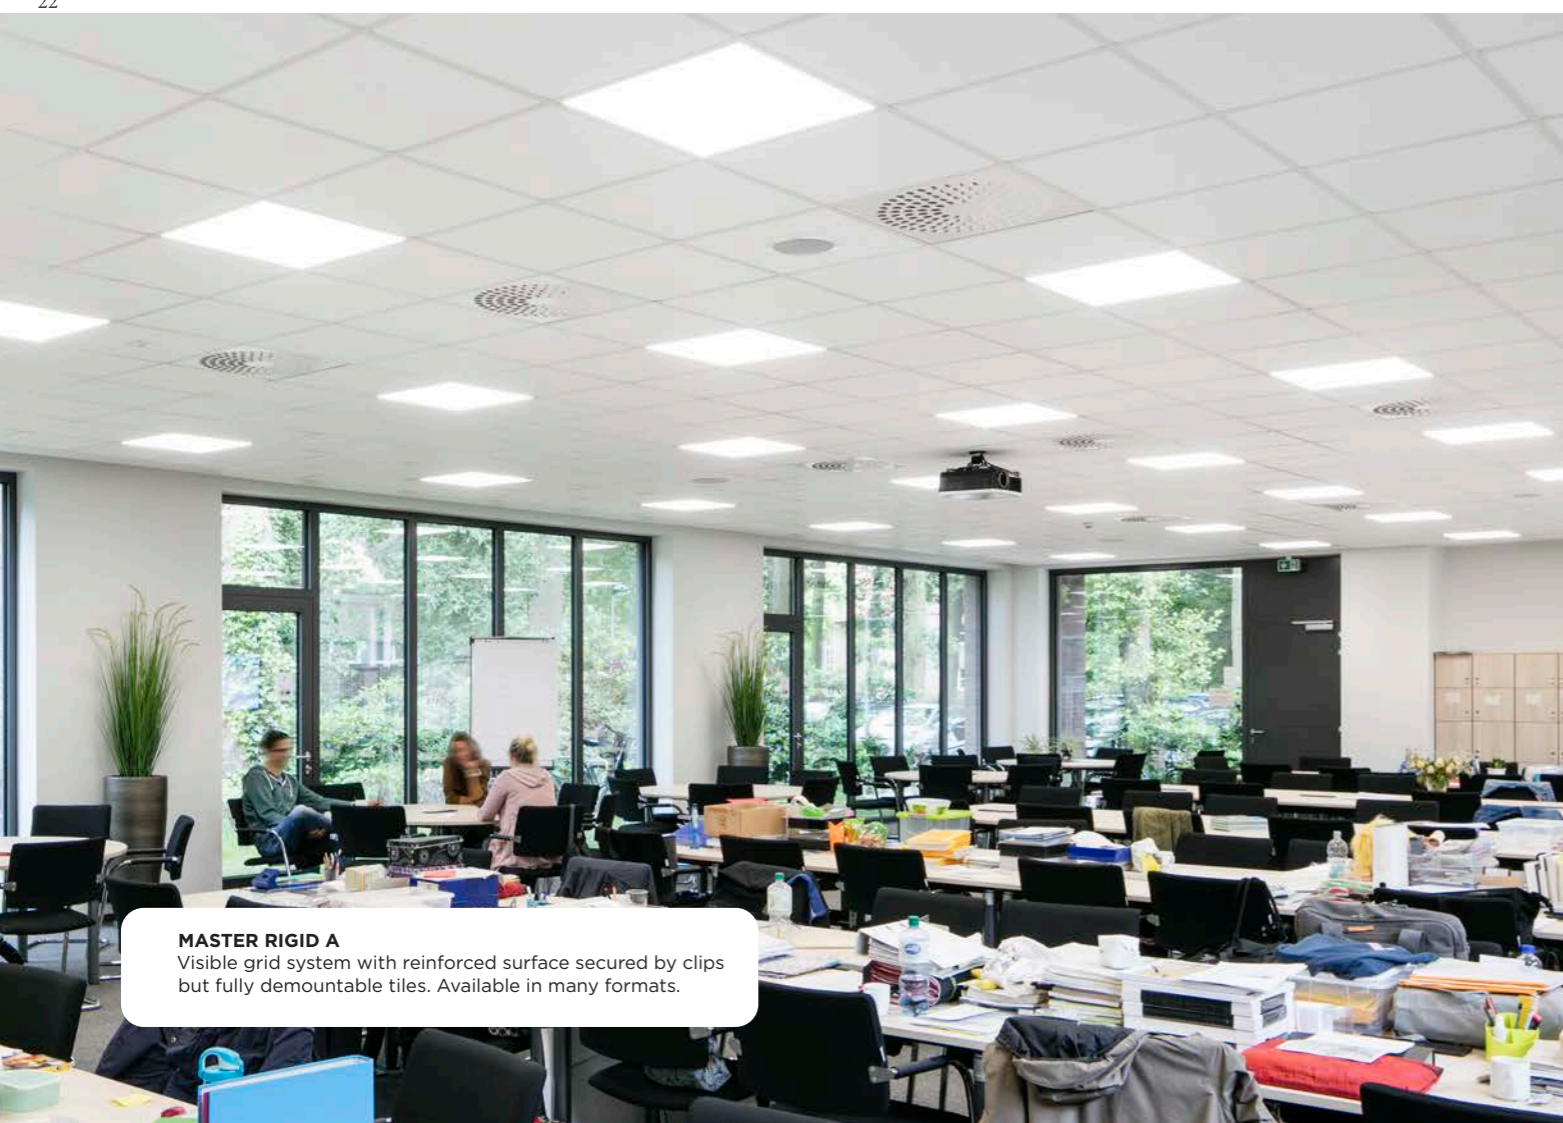

**MASTER RIGID A**  
Visible grid system with reinforced surface secured by clips but fully demountable tiles. Available in many formats.

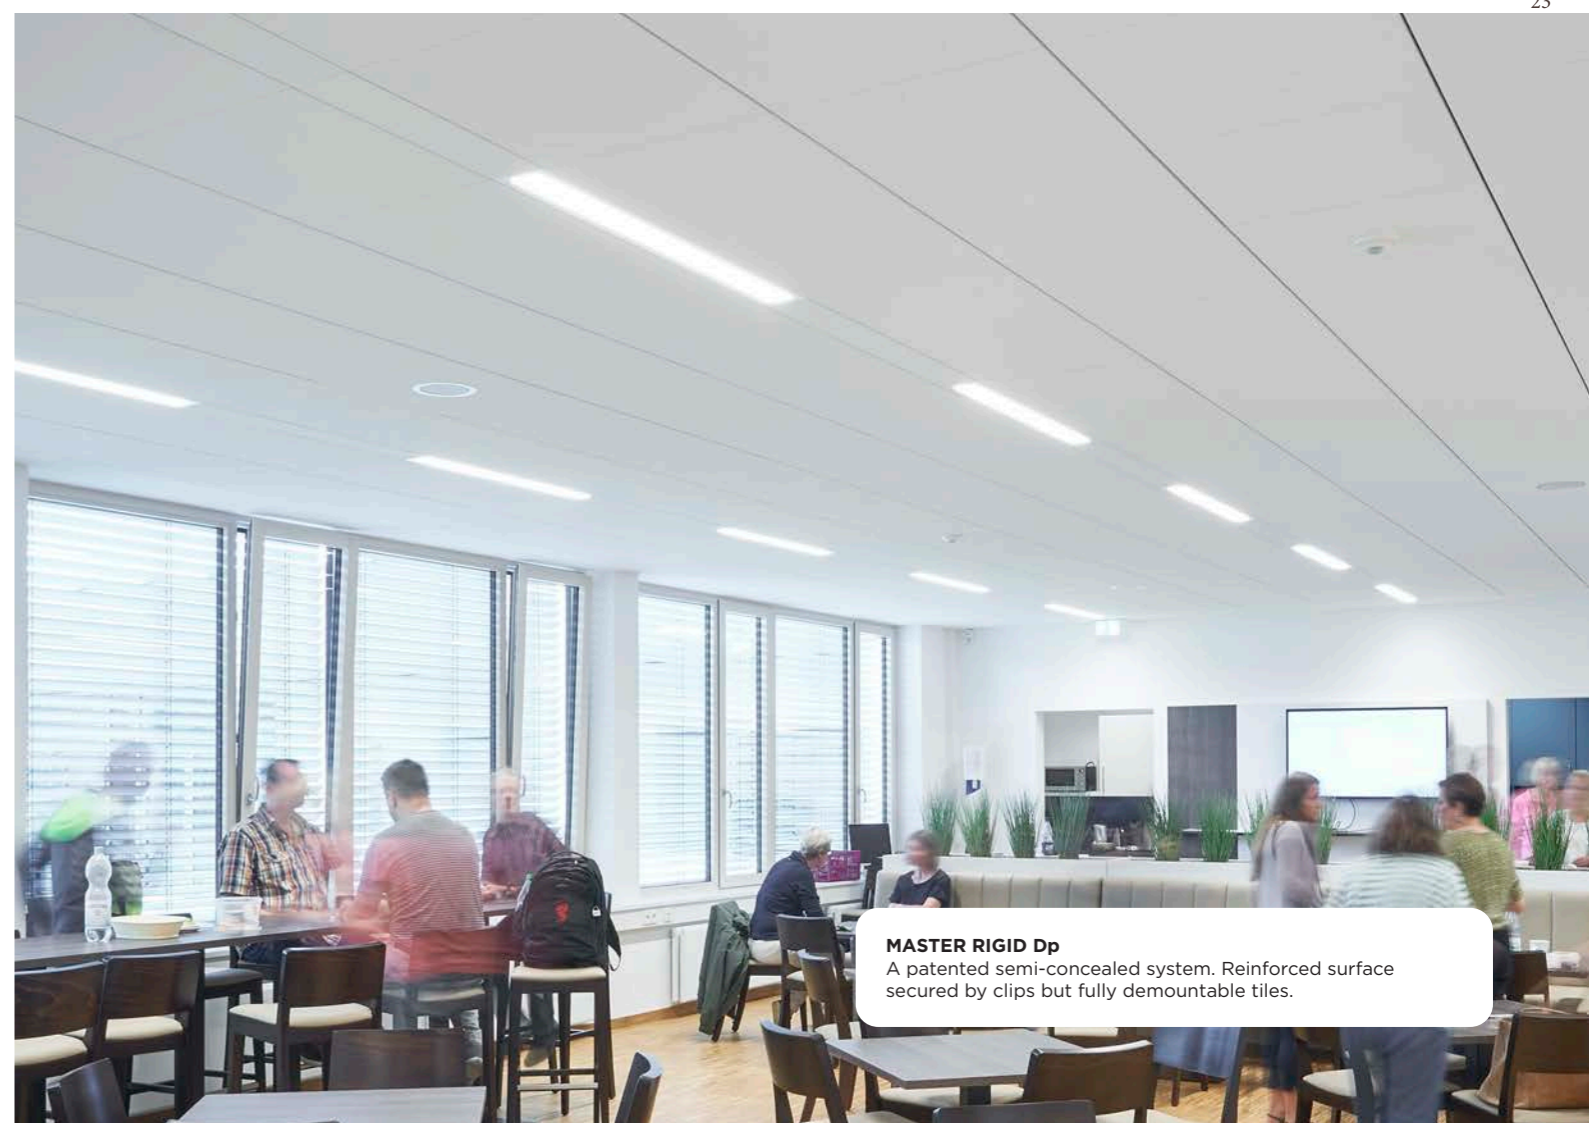


**MASTER RIGID Dp**  
A patented semi-concealed system. Reinforced surface secured by clips but fully demountable tiles.


# Products

## Systems and properties

### Acoustics, technical properties and installation diagrams

Master A .....	26
Master B.....	28
Master Ds .....	30
Master E.....	32
Master Eg .....	34
Master SQ .....	36
Master F.....	38
Master Rigid A.....	40
Master Rigid E.....	42
Master Rigid Dp.....	44
Square 43.....	46
Dot .....	48

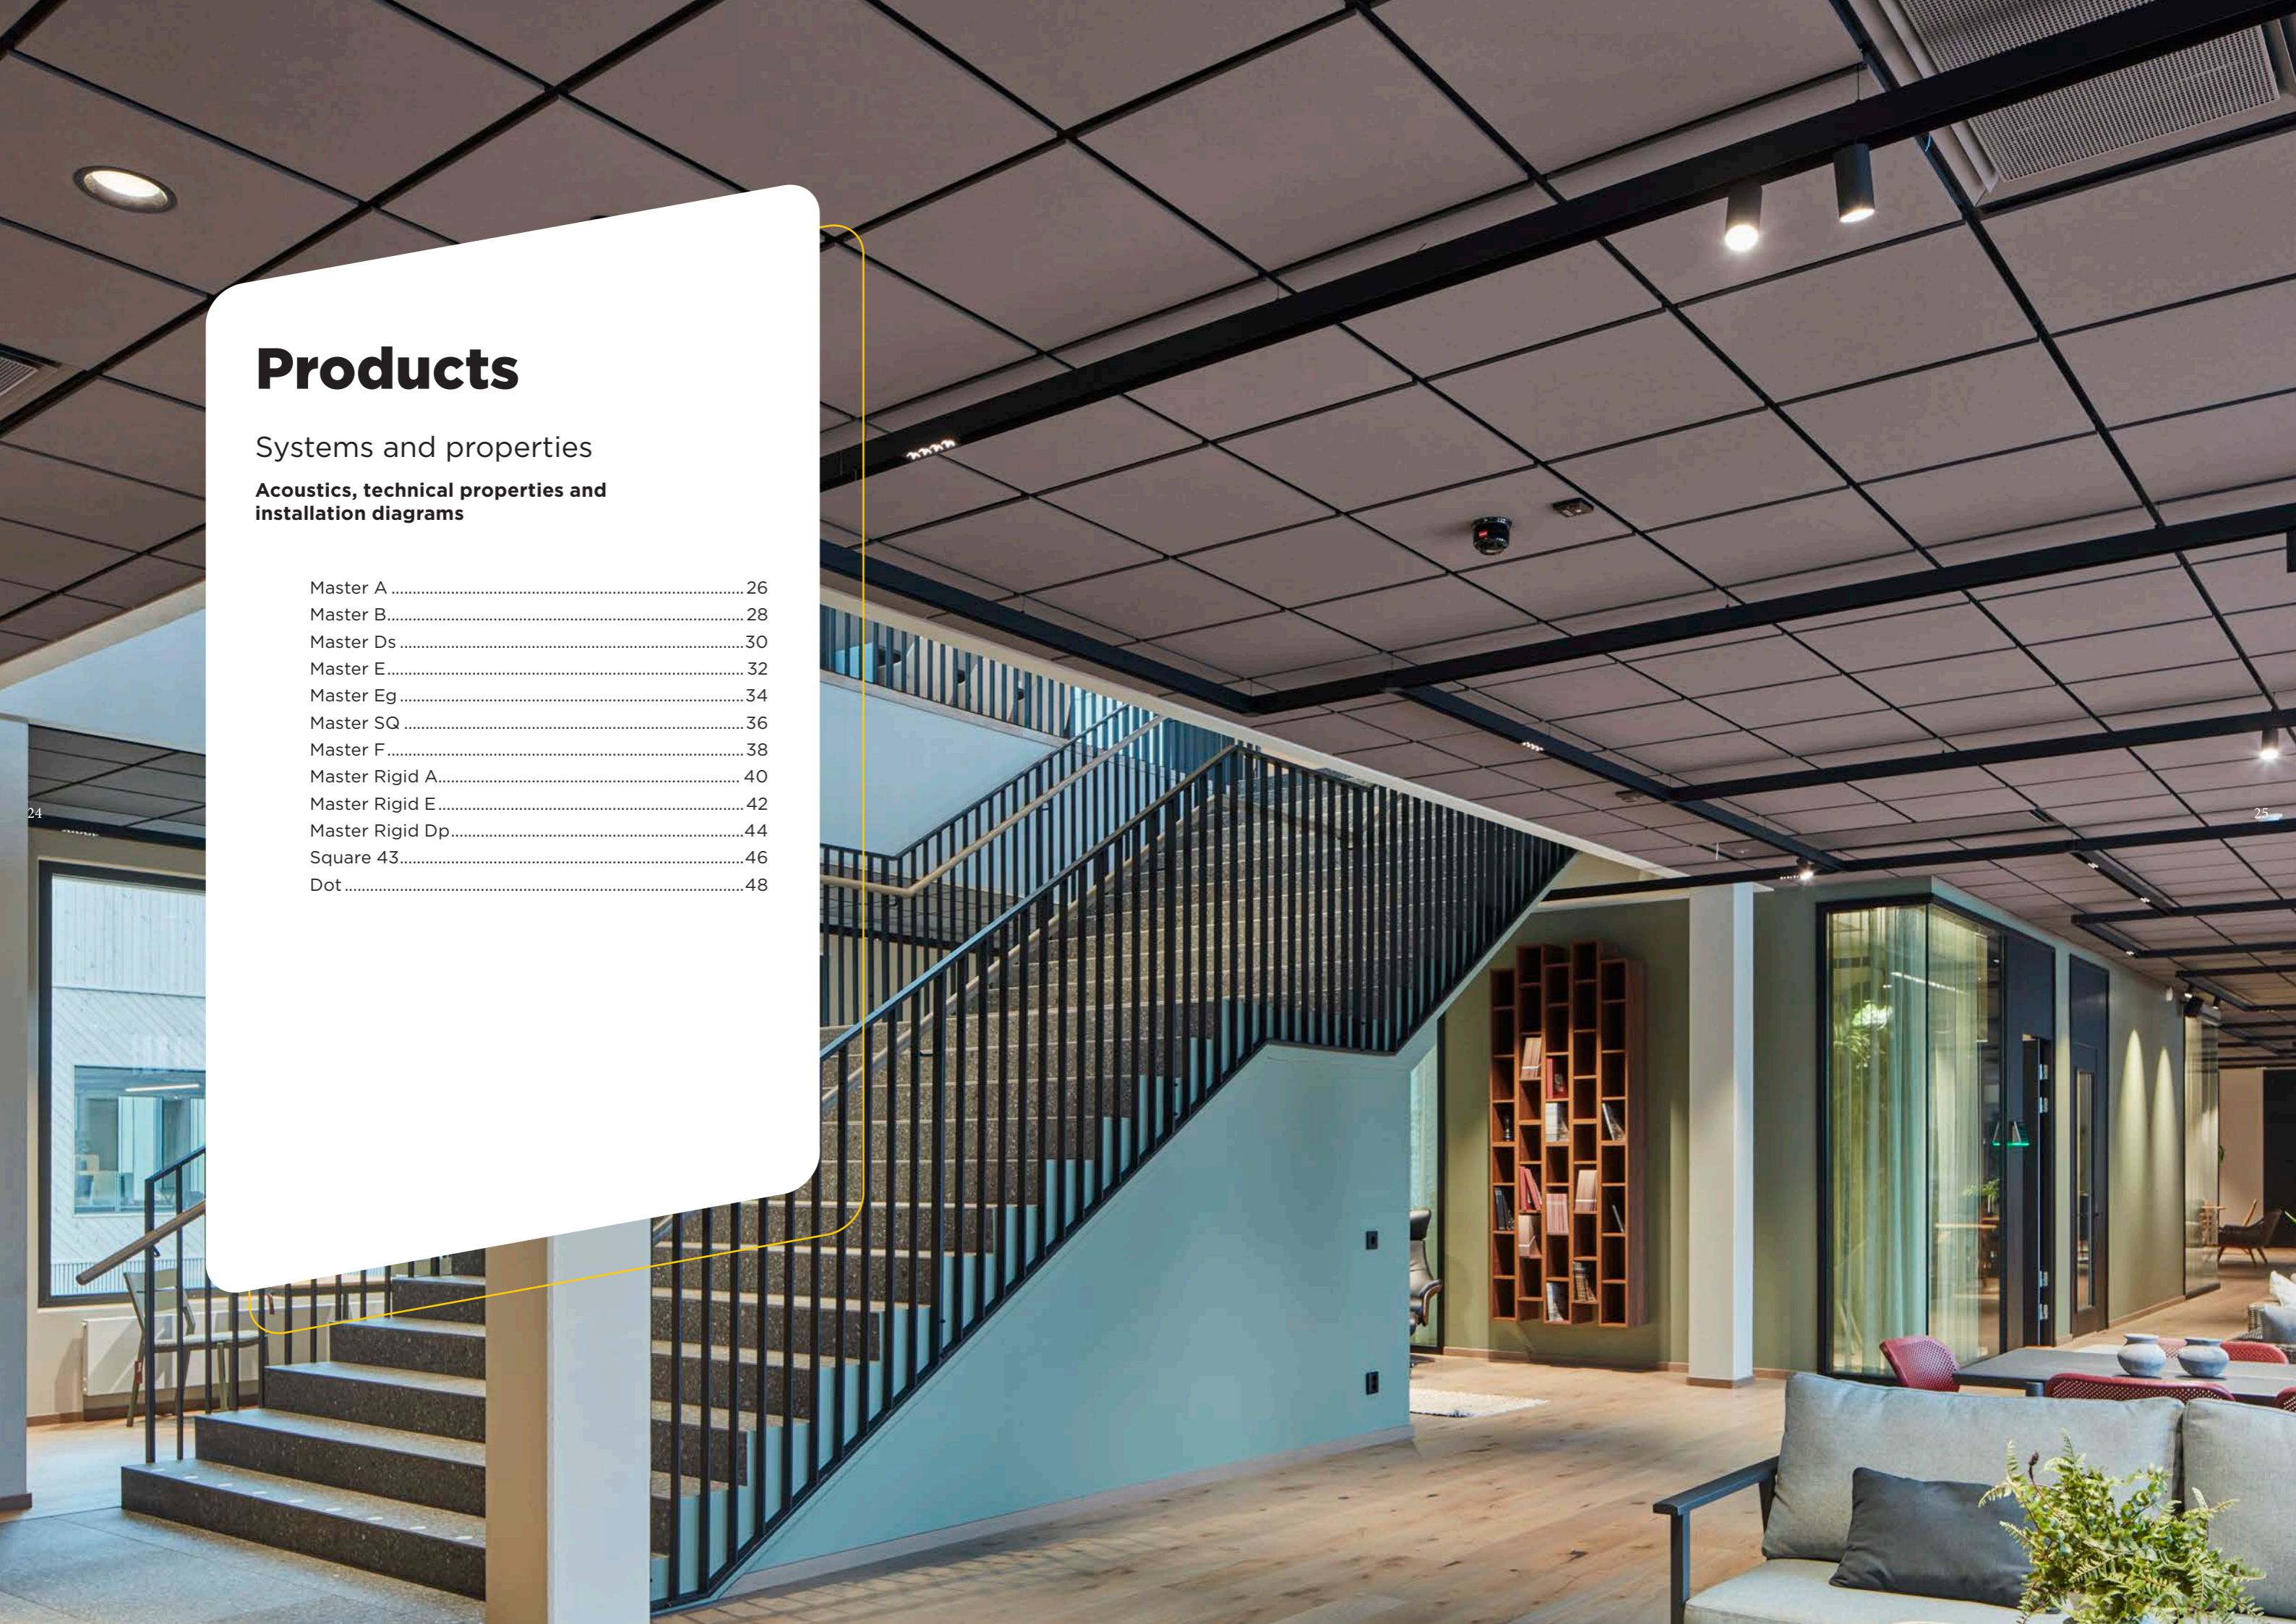




# Ecophon Master™ A

## ACOUSTICS:

### Sound Absorption:

Test results according to EN ISO 354. Classification according to EN ISO 11654, and the single value ratings for Noise Reduction Coefficient, NRC and Sound Absorption Average, SAA according to ASTM C 423.

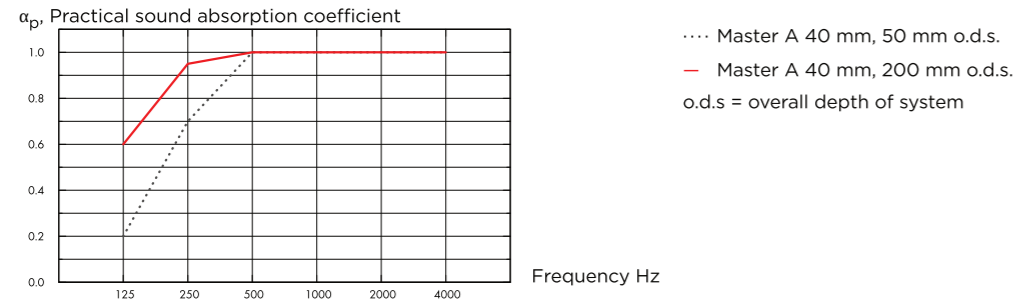

THK mm	o.d.s. mm	$\alpha_p$ , Practical sound absorption coefficient						$\alpha_w$	Sound absorption class
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
40	50	0.20	0.70	1.00	1.00	1.00	1.00	1.00	A
40	200	0.60	0.95	1.00	1.00	1.00	1.00	1.00	A

THK mm	AC(1.5) Articulation Class, ASTM E1111, ASTM E1110	$D_{nfw}$ Weighted normalized flanking level difference, ISO 10848-2	CAC dB Ceiling Attenuation Class, ASTM 1414, ASTM E413
40	200	28	30

## INDOOR AIR QUALITY:

Certificate / Label	G35xxxxxx articles	CarbonLow
Eurofins Indoor Air Comfort*	IAC Gold	IAC Gold
French VOC	A+	A+
Finnish M1		•

**CRADLE TO CRADLE CERTIFIED®:** This product is Cradle to Cradle Certified® at Bronze level (version 4.0).

**MATERIAL HEALTH:** This product has received a C2C Certified Material Health Certificate™ at the Silver level (standard version 4.0). The C2C Certified Material Health Certificate™ is a verification of the health and safety of a product's composition using the Material Health requirements of the Cradle-to-Cradle Certified Product Standard.

**CARBON FOOTPRINT:** Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO <sub>2</sub> equiv/m <sup>2</sup>
Master A	3,70
Master A, CarbonLow (EN 15804+A2)	2,40

**CIRCULARITY:** Minimum post-consumer recycled content: 59%, Recyclability: Fully recyclable,

**FIRE SAFETY:** The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. Europe: EN 13501-1, A2-s1,d0,

**HUMIDITY RESISTANCE:** Class C, relative humidity 95% and 30°C, according to EN 13964:2014

**PACKAGING INFORMATION:** Information is indicative and subject to change. 600x600x40: A, 20, 7.20, 1200x600x40: A, 10, 7.20, 1200x1200x40: A, 6, 8.64, 625x625x40: A, 20, 7.81,

**SYSTEM WEIGHT:** Weight information is indicative and subject to variation. Master A: 2,5, Master A + Connect grid system: 3,5,

**VISUAL APPEARANCE:** White Frost, nearest NCS colour sample S 0500-N, 85% light reflectance. Gloss < 1.

**CLEANABILITY:** Daily dusting and vacuum cleaning. Weekly wet wiping.

**ACCESSIBILITY:** The tiles are easily demountable. Minimum demounting depth according to installation diagrams.


**INSTALLATION:** Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification.

**CE:** Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.


**MECHANICAL PROPERTIES:** See table about Max live load and Min load bearing capacity and Functional demands, Mechanical properties at [www.ecophon.com](http://www.ecophon.com).

## INSTALLATION DIAGRAM IN DETAIL [WWW.ECOPHON.COM](http://WWW.ECOPHON.COM)

**M56**  
Installation diagram (M56) for Ecophon Master A

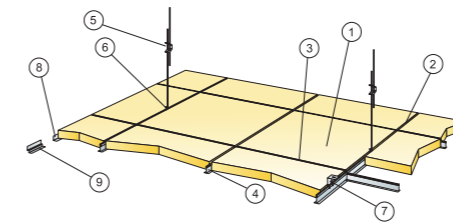

© Ecophon Group




# Ecophon Master™ B

## ACOUSTICS:

### Sound Absorption:

Test results according to EN ISO 354. Classification according to EN ISO 11654, and the single value ratings for Noise Reduction Coefficient, NRC and Sound Absorption Average, SAA according to ASTM C 423.

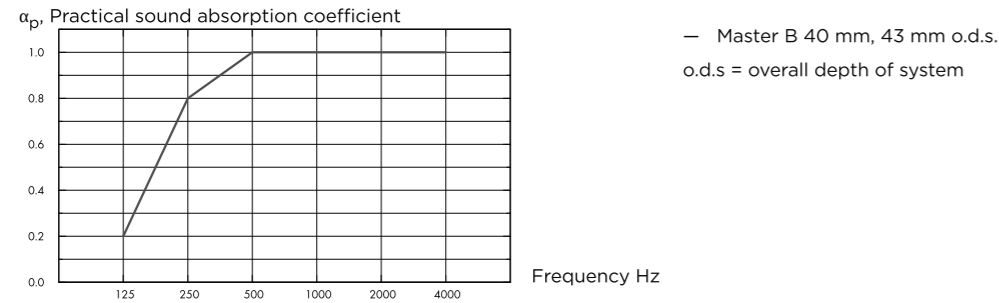

THK mm	o.d.s. mm	$\alpha_p$ , Practical sound absorption coefficient						$\alpha_w$	Sound absorption class
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
40	40	0.20	0.80	1.00	1.00	1.00	1.00	1.00	A

## INDOOR AIR QUALITY:

Certificate / Label	G35xxxxxx articles	CarbonLow
Eurofins Indoor Air Comfort*	IAC Gold	IAC Gold
French VOC	A+	A+
Finnish M1		•

**MATERIAL HEALTH:** This product has received a C2C Certified Material Health Certificate™ at the Silver level (standard version 4.0). The C2C Certified Material Health Certificate™ is a verification of the health and safety of a product's composition using the Material Health requirements of the Cradle-to-Cradle Certified Product Standard.

**CRADLE TO CRADLE CERTIFIED®:** This product is Cradle to Cradle Certified® at Bronze level (version 4.0).

**CARBON FOOTPRINT:** Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO <sub>2</sub> equiv/m <sup>2</sup>
Master B	6,50
Master B, CarbonLow (EN 15804+A2)	3,91

**CIRCULARITY:** Minimum post-consumer recycled content: 62%, Recyclability: Fully recyclable,

**FIRE SAFETY:** The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. Europe: EN 13501-1, A2-s1,d0,

**HUMIDITY RESISTANCE:** Class C, relative humidity 95% and 30°C, according to EN 13964:2014

**VISUAL APPEARANCE:** White Frost, nearest NCS colour sample S 0500-N, 85% light reflectance. Gloss < 1.

**CLEANABILITY:** Daily dusting and vacuum cleaning. Weekly wet wiping.

**ACCESSIBILITY:** The tiles are not demountable.

**INSTALLATION:** Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification. Rendered surfaces must have sufficient strength to be able to carry the load imposed by the tiles. If doubts, test gluing should be carried out. The surface should always be dry and clean. For best result the surface should be even.

**PACKAGING INFORMATION:** Information is indicative and subject to change. 600x600x40: B, 10, 3.60, 1200x600x40: B, 6, 4.32,


**SYSTEM WEIGHT:** Weight information is indicative and subject to variation. Master B: 3,6,

**MECHANICAL PROPERTIES:** Additional live load has to be fixed to the soffit.


**CE:** Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.

## INSTALLATION DIAGRAM IN DETAIL WWW.ECOPHON.COM

**M113**  
Installation diagram (M113) for Ecophon Master B, using Connect Absorber glue

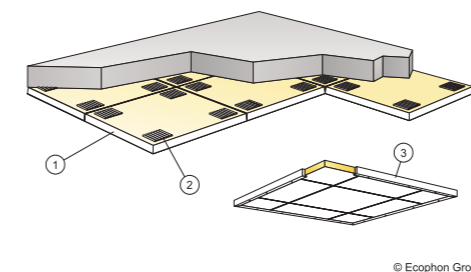

© Ecophon Group




# Ecophon Master™ Ds

## ACOUSTICS:

### Sound Absorption:

Test results according to EN ISO 354. Classification according to EN ISO 11654, and the single value ratings for Noise Reduction Coefficient, NRC and Sound Absorption Average, SAA according to ASTM C 423.

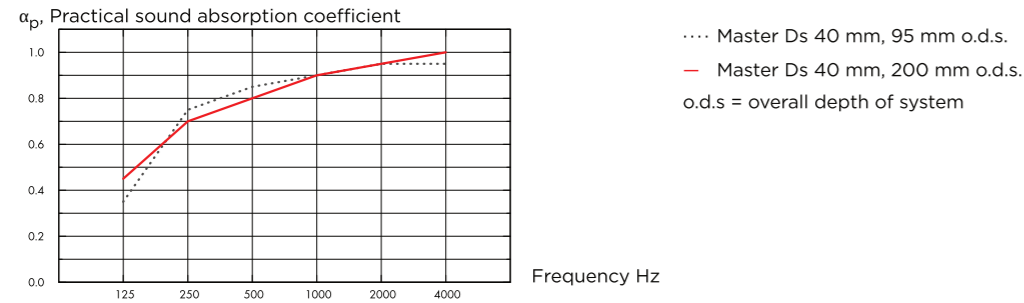

THK mm	o.d.s. mm	$\alpha_p$ , Practical sound absorption coefficient						$\alpha_w$	Sound absorption class
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
40	95	0.35	0.75	0.85	0.90	0.95	0.95	A	
40	200	0.45	0.70	0.80	0.90	0.95	1.00	A	

THK mm	AC(1.5) Articulation Class, ASTM E1111, ASTM E1110	$D_{nfw}$ Weighted normalized flanking level difference, ISO 10848-2	CAC dB Ceiling Attenuation Class, ASTM 1414, ASTM E413
40	200	32	33

**CRADLE TO CRADLE CERTIFIED®:** This product is Cradle to Cradle Certified® at Bronze level (version 4.0).

**MATERIAL HEALTH:** This product has received a C2C Certified Material Health Certificate™ at the Silver level (standard version 4.0). The C2C Certified Material Health Certificate™ is a verification of the health and safety of a product's composition using the Material Health requirements of the Cradle-to-Cradle Certified Product Standard.

**CARBON FOOTPRINT:** Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO <sub>2</sub> equiv/m <sup>2</sup>
Master Ds	7,10

**CIRCULARITY:** Minimum post-consumer recycled content: 63%, Recyclability: Fully recyclable,

**FIRE SAFETY:** The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. Europe: EN 13501-1, A2-s1,d0,

**HUMIDITY RESISTANCE:** Class C, relative humidity 95% and 30°C, according to EN 13964:2014

**VISUAL APPEARANCE:** White Frost, nearest NCS colour sample S 0500-N, 85% light reflectance. Gloss < 1.

**CLEANABILITY:** Daily dusting and vacuum cleaning. Weekly wet wiping.

**ACCESSIBILITY:** The tiles are easily demountable. Minimum demounting depth according to installation diagrams.

**INSTALLATION:** Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification. The systems are not recommended for small rooms (approximately 2x2 m<sup>2</sup>). Ceilings with a large amount of integrations require careful planning, design and installation.

**PACKAGING INFORMATION:** Information is indicative and subject to change. 600x600x40: Ds, 10, 3.60, 1200x600x40: Ds, 6, 4.32,


**SYSTEM WEIGHT:** Weight information is indicative and subject to variation. Master Ds: 4,4, Master Ds + Connect grid system: 5,3,

**MECHANICAL PROPERTIES:** See table about Max live load and Min load bearing capacity and Functional demands, Mechanical properties at [www.ecophon.com](http://www.ecophon.com).


**CE:** Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.

## INSTALLATION DIAGRAM IN DETAIL WWW.ECOPHON.COM


**M626**  
Installation diagram (M626) for Ecophon Master Ds. Suspended installation

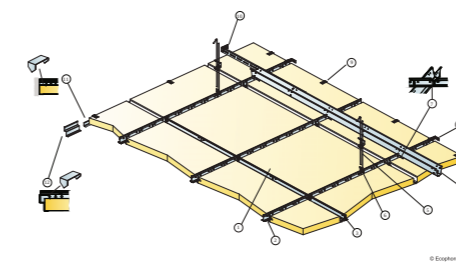


**M627**  
Installation diagram (M627) for Ecophon Master Ds 600x600 mm. Suspended installation

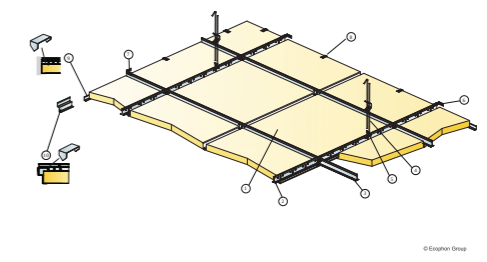

**M628**  
Installation diagram (M628) for Ecophon Master Ds 600x600 mm. Direct installation

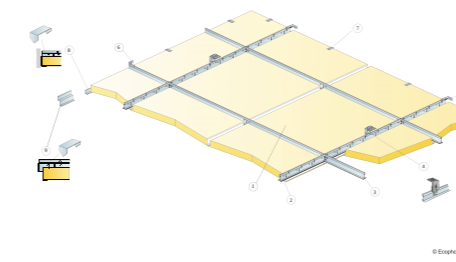




# Ecophon Master™ E

## ACOUSTICS:

### Sound Absorption:

Test results according to EN ISO 354. Classification according to EN ISO 11654, and the single value ratings for Noise Reduction Coefficient, NRC and Sound Absorption Average, SAA according to ASTM C 423.

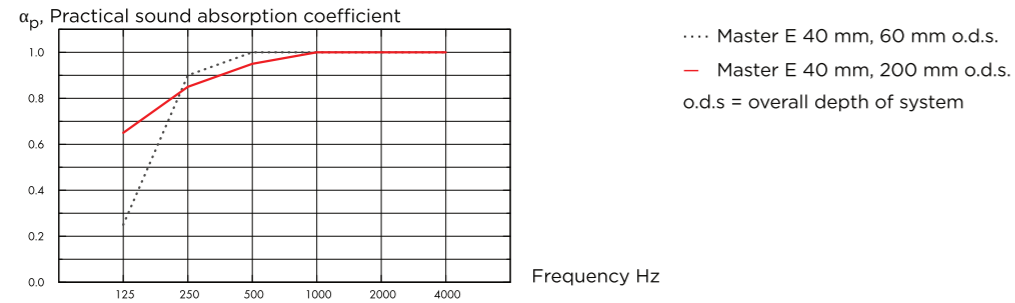

THK mm	o.d.s. mm	$\alpha_p$ , Practical sound absorption coefficient						$\alpha_w$	Sound absorption class
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
40	60	0.25	0.90	1.00	1.00	1.00	1.00	1.00	A
40	200	0.65	0.85	0.95	1.00	1.00	1.00	1.00	A

THK mm	AC(1.5) Articulation Class, ASTM E1111, ASTM E1110	$D_{nfw}$ Weighted normalized flanking level difference, ISO 10848-2	CAC dB Ceiling Attenuation Class, ASTM 1414, ASTM E413
40	200	29	31

## INDOOR AIR QUALITY:

Certificate / Label	G35xxxxxx articles	CarbonLow
Eurofins Indoor Air Comfort*	IAC Gold	IAC Gold
French VOC	A+	A+
Finnish M1		•

**CRADLE TO CRADLE CERTIFIED®:** This product is Cradle to Cradle Certified® at Bronze level (version 4.0).

**MATERIAL HEALTH:** This product has received a C2C Certified Material Health Certificate™ at the Silver level (standard version 4.0). The C2C Certified Material Health Certificate™ is a verification of the health and safety of a product's composition using the Material Health requirements of the Cradle-to-Cradle Certified Product Standard.

**CARBON FOOTPRINT:** Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO <sub>2</sub> equiv/m <sup>2</sup>
Master E	6,10
Master E, CarbonLow (EN 15804+A2)	3,50

**CIRCULARITY:** Minimum post-consumer recycled content: 61%, Recyclability: Fully recyclable,

**FIRE SAFETY:** The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. Europe: EN 13501-1, A2-s1,d0,

**HUMIDITY RESISTANCE:** Class C, relative humidity 95% and 30°C, according to EN 13964:2014

**VISUAL APPEARANCE:** White Frost, nearest NCS colour sample S 0500-N, 85% light reflectance. Gloss < 1.

**CLEANABILITY:** Daily dusting and vacuum cleaning. Weekly wet wiping.

**ACCESSIBILITY:** The tiles are easily demountable. Minimum demounting depth according to installation diagrams.

**INSTALLATION:** Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification.

**PACKAGING INFORMATION:** Information is indicative and subject to change. 600x600x40: E, 10, 3.60, 1200x600x40: E, 6, 4.32, 1200x1200x40: E, 4, 5.76,


**SYSTEM WEIGHT:** Weight information is indicative and subject to variation. Master E: 3,5, Master E + Connect grid system: 4,5,

**MECHANICAL PROPERTIES:** See table about Max live load and Min load bearing capacity and Functional demands, Mechanical properties at [www.ecophon.com](http://www.ecophon.com).

**CE:** Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.


## INSTALLATION DIAGRAM IN DETAIL WWW.ECOPHON.COM

**M58**  
Installation diagram (M58) for Ecophon Master E

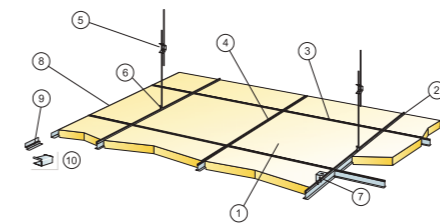


© Saint-Gobain Ecophon AB

**M567**  
Installation diagram (M567) for Ecophon Master E 1200x1200

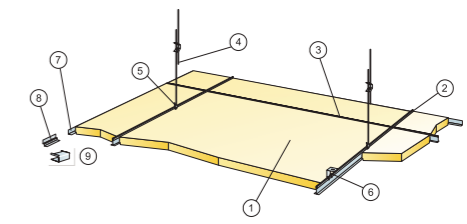

© Saint-Gobain Ecophon AB




# Ecophon Master™ Eg

## ACOUSTICS:

### Sound Absorption:

Test results according to EN ISO 354. Classification according to EN ISO 11654.

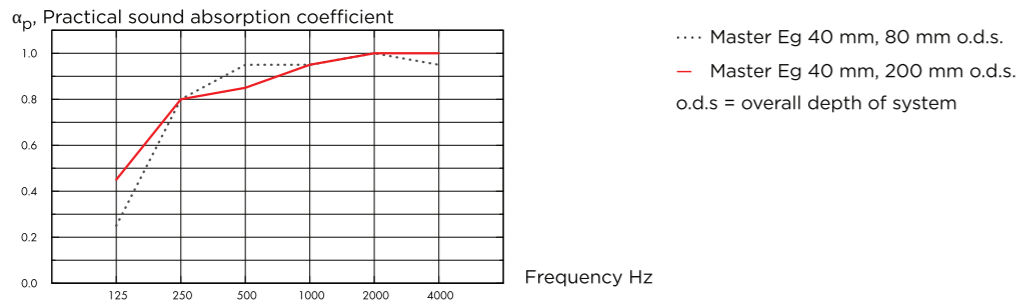

THK mm	o.d.s. mm	$\alpha_p$ Practical sound absorption coefficient						$\alpha_w$	Sound absorption class
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
40	80	0.25	0.80	0.95	0.95	1.00	0.95	1.00	A
40	200	0.45	0.80	0.85	0.95	1.00	1.00	0.95	A

THK mm	AC(1.5)	
	Articulation Class, ASTM E1111, ASTM E1110	
40	200	

## INDOOR AIR QUALITY:

### Certificate / Label

Eurofins Indoor Air Comfort® IAC Gold  
French VOC A+

**CRADLE TO CRADLE CERTIFIED®:** This product is Cradle to Cradle Certified® at Bronze level (version 4.0).

**MATERIAL HEALTH:** This product has received a C2C Certified Material Health Certificate™ at the Silver level (standard version 4.0). The C2C Certified Material Health Certificate™ is a verification of the health and safety of a product's composition using the Material Health requirements of the Cradle-to-Cradle Certified Product Standard.

**CARBON FOOTPRINT:** Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO <sub>2</sub> equiv/m <sup>2</sup>
Master Eg	6,10

**CIRCULARITY:** Minimum post-consumer recycled content: 61%, Recyclability: Fully recyclable,

**FIRE SAFETY:** The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. Europe: EN 13501-1, A2-s1,d0,

**HUMIDITY RESISTANCE:** Class C, relative humidity 95% and 30°C, according to EN 13964:2014

**VISUAL APPEARANCE:** White Frost, nearest NCS colour sample S 0500-N, 85% light reflectance. Gloss < 1.

**CLEANABILITY:** Daily dusting and vacuum cleaning. Weekly wet wiping.

**ACCESSIBILITY:** The tiles are easily demountable. Minimum demounting depth according to installation diagrams.

**INSTALLATION:** Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification.

**PACKAGING INFORMATION:** Information is indicative and subject to change. 600x600x40: Eg, 10, 3.60, 1200x600x40: Eg, 6, 4.32, 1200x1200x40: Eg, 4, 5.76, 2400x600x40: Eg, 4, 5.76,


**SYSTEM WEIGHT:** Weight information is indicative and subject to variation. Master Eg: 3,6, Master Eg + Connect grid system: 4,6,

**MECHANICAL PROPERTIES:** See table about Max live load and Min load bearing capacity and Functional demands, Mechanical properties at [www.ecophon.com](http://www.ecophon.com).


**CE:** Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.

## INSTALLATION DIAGRAM IN DETAIL WWW.ECOPHON.COM


**M498**  
Installation diagram (M498) for Ecophon Master Eg

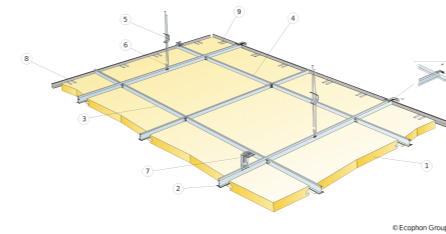


**M499**  
Installation diagram (M499) for Ecophon Master Eg

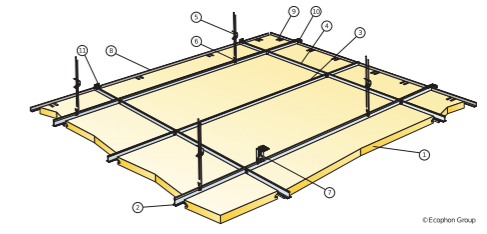

**M500**  
Installation diagram (M500) for Ecophon Master Eg

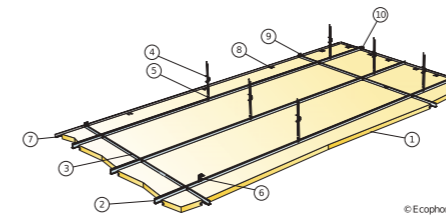




# Ecophon Master™ SQ

## ACOUSTICS:

### Sound Absorption:

Test results according to EN ISO 354. Classification according to EN ISO 11654.

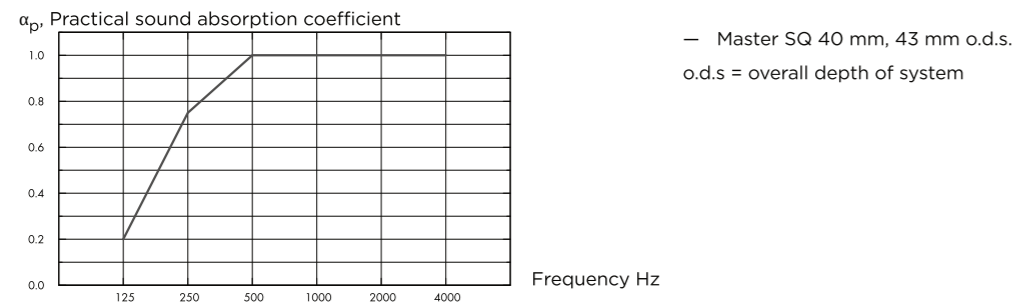

THK mm	o.d.s. mm	$\alpha_p$ Practical sound absorption coefficient						$\alpha_w$	Sound absorption class
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
40	40	0.20	0.75	1.00	1.00	1.00	1.00	1.00	A

## INDOOR AIR QUALITY:

Certificate / Label	G35xxxxxx articles	CarbonLow
Eurofins Indoor Air Comfort*	IAC Gold	IAC Gold
French VOC	A+	A+
Finnish M1		•

**CRADLE TO CRADLE CERTIFIED®:** This product is Cradle to Cradle Certified® at Bronze level (version 4.0).

**MATERIAL HEALTH:** This product has received a C2C Certified Material Health Certificate™ at the Silver level (standard version 4.0). The C2C Certified Material Health Certificate™ is a verification of the health and safety of a product's composition using the Material Health requirements of the Cradle-to-Cradle Certified Product Standard.

**CARBON FOOTPRINT:** Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO <sub>2</sub> equiv/m <sup>2</sup>
Master SQ	9,20
Master SQ, CarbonLow (EN 15804+A2)	3,26

**CIRCULARITY:** Minimum post-consumer recycled content: 60%, Recyclability: Fully recyclable,

**FIRE SAFETY:** The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. Europe: EN 13501-1, A2-s1,d0,

**HUMIDITY RESISTANCE:** Class C, relative humidity 95% and 30°C, according to EN 13964:2014

**VISUAL APPEARANCE:** White Frost, nearest NCS colour sample S 0500-N, 85% light reflectance. Gloss < 1.

**CLEANABILITY:** Daily dusting and vacuum cleaning. Weekly wet wiping.

**ACCESSIBILITY:** The tiles are not demountable.

**INSTALLATION:** Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification. Rendered surfaces must have sufficient strength to be able to carry the load imposed by the tiles. If doubts, test gluing should be carried out. The surface should always be dry and clean. For best result the surface should be even, however an acceptable result could be achieved on slightly uneven surfaces.

**PACKAGING INFORMATION:** Information is indicative and subject to change. 600x600x40: SQ, 10, 3.60, 1200x600x40: SQ, 6, 4.32,


**SYSTEM WEIGHT:** Weight information is indicative and subject to variation. Master SQ: 3,6,

**MECHANICAL PROPERTIES:** Additional live load has to be fixed to the soffit.


**CE:** Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.

## INSTALLATION DIAGRAM IN DETAIL WWW.ECOPHON.COM

**M106**  
Installation diagram (M106) for Ecophon Master SQ, using Connect Absorber glue

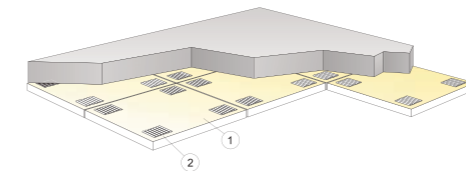

© Ecophon Group




# Ecophon Master™ F

## ACOUSTICS:

### Sound Absorption:

Test results according to EN ISO 354. Classification according to EN ISO 11654, and the single value ratings for Noise Reduction Coefficient, NRC and Sound Absorption Average, SAA according to ASTM C 423.

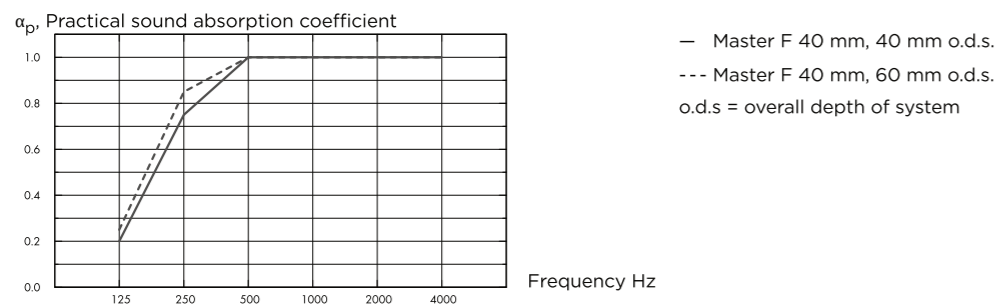

THK mm	o.d.s. mm	$\alpha_p$ , Practical sound absorption coefficient						$\alpha_w$	Sound absorption class
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
40	40	0.20	0.75	1.00	1.00	1.00	1.00	1.00	A
40	60	0.25	0.85	1.00	1.00	1.00	1.00	1.00	A

## INDOOR AIR QUALITY:

### Certificate / Label

Eurofins Indoor Air Comfort® IAC Gold  
 French VOC A+

**CRADLE TO CRADLE CERTIFIED®:** This product is Cradle to Cradle Certified® at Bronze level (version 4.0).

**MATERIAL HEALTH:** This product has received a C2C Certified Material Health Certificate™ at the Silver level (standard version 4.0). The C2C Certified Material Health Certificate™ is a verification of the health and safety of a product's composition using the Material Health requirements of the Cradle-to-Cradle Certified Product Standard.

**CARBON FOOTPRINT:** Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO <sub>2</sub> equiv/m <sup>2</sup>
Master F	7,30

**CIRCULARITY:** Minimum post-consumer recycled content: 63%, Recyclability: Fully recyclable,

**FIRE SAFETY:** The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. Europe: EN 13501-1, A2-s1,d0,

**HUMIDITY RESISTANCE:** Class C, relative humidity 95% and 30°C, according to EN 13964:2014

**VISUAL APPEARANCE:** White Frost, nearest NCS colour sample S 0500-N, 85% light reflectance. Gloss < 1.

**CLEANABILITY:** Daily dusting and vacuum cleaning. Weekly wet wiping.

**ACCESSIBILITY:** The tiles are not demountable.

**INSTALLATION:** Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification. For best result the surface should be even, however an acceptable result could be achieved on slightly uneven surfaces. If very uneven surfaces - installation of furring (evenly spaced timber battens) as the substrate for the tiles is recommended.

**PACKAGING INFORMATION:** Information is indicative and subject to change. 600x600x40: F, 10, 3.60, 1200x600x40: F, 6, 4.32,

**SYSTEM WEIGHT:** Weight information is indicative and subject to variation. Master F: 4,3,


**MECHANICAL PROPERTIES:** Additional live load has to be fixed to the soffit.

**CE:** Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.


## INSTALLATION DIAGRAM IN DETAIL WWW.ECOPHON.COM

### M52

Installation diagram (M52) for Ecophon Master F

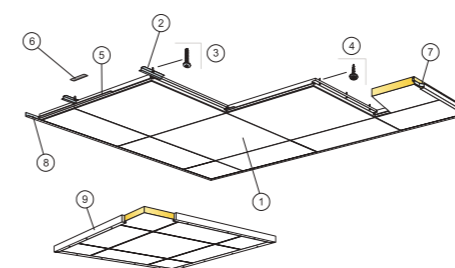

© Ecophon Group




# Ecophon Master™ Rigid A

## ACOUSTICS:

### Sound Absorption:

Test results according to EN ISO 354. Classification according to EN ISO 11654.

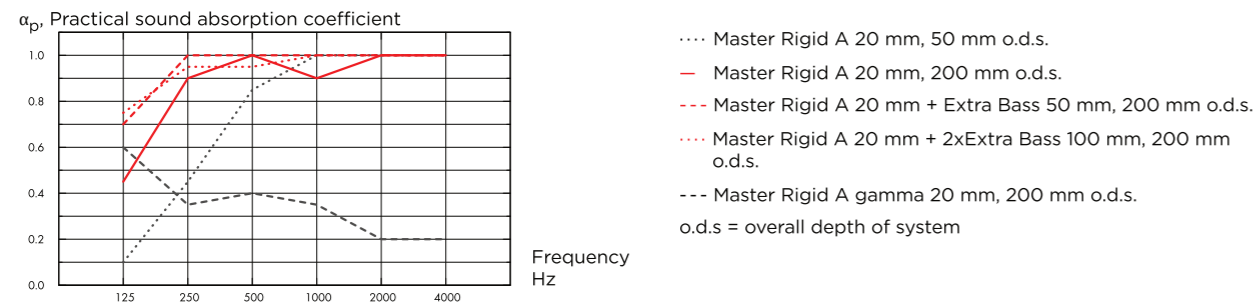

	THK mm	o.d.s. mm	$\alpha_p$ , Practical sound absorption coefficient						$\alpha_w$	Sound absorption class
			125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
-	20	50	0.10	0.45	0.85	1.00	1.00	1.00	0.75	C
-	20	200	0.45	0.90	1.00	0.90	1.00	1.00	1.00	A
+ Extra Bass	70	200	0.70	1.00	1.00	1.00	1.00	1.00	1.00	A
+ 2xExtra Bass	120	200	0.75	0.95	0.95	1.00	1.00	1.00	1.00	A
gamma	20	200	0.60	0.35	0.40	0.35	0.20	0.20	0.30	D

## INDOOR AIR QUALITY:

### Certificate / Label

Eurofins Indoor Air Comfort\* IAC Gold  
French VOC A+

**CARBON FOOTPRINT:** Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO <sub>2</sub> equiv/m <sup>2</sup>
Master Rigid A	2,95

**CIRCULARITY:** Minimum post-consumer recycled content: 46%, Recyclability: Fully recyclable,

**FIRE SAFETY:** The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. Europe: EN 13501-1, A2-s1,d0,

**HUMIDITY RESISTANCE:** Class C, relative humidity 95% and 30°C, according to EN 13964:2014

**VISUAL APPEARANCE:** White Frost, nearest NCS colour sample S 0500-N, 85% light reflectance. Gloss < 1.

**CLEANABILITY:** Daily dusting and vacuum cleaning. Weekly wet wiping.

**ACCESSIBILITY:** The tiles are secured in the grid, but demountable. Minimum demounting depth according to installation diagrams.

**INSTALLATION:** Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification.

**PACKAGING INFORMATION:** Information is indicative and subject to change. 600x600x20: A, 28, 10.08, 1200x600x20: A, 14, 10.08, 625x625x20: A, 28, 10.94, 1600x600x20: A, 12, 11.52, 1800x600x20: A, 12, 12.96, 2000x600x20: A, 12, 14.40, 2400x600x20: A, 12, 17.28,

**SYSTEM WEIGHT:** Weight information is indicative and subject to variation. Master Rigid A: 1,6, Master Rigid A + Connect grid system: 2,6,

**MECHANICAL PROPERTIES:** See table regarding the min- and max- load bearing capacities and functional demands.


**IMPACT RESISTANCE:** M316: 3A,

**CE:** Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.

## INSTALLATION DIAGRAM IN DETAIL WWW.ECOPHON.COM


### M316EB


Installation diagram (M316EB) for Ecophon Master Rigid A

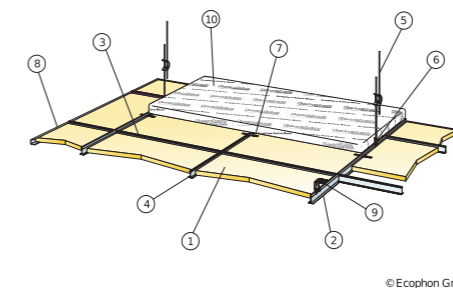

### M333

Installation diagram (M333) for Ecophon Master Rigid A XL in corridors

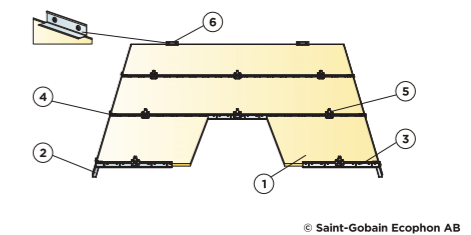




# Ecophon Master™ Rigid E

## ACOUSTICS:

### Sound Absorption:

Test results according to EN ISO 354. Classification according to EN ISO 11654.

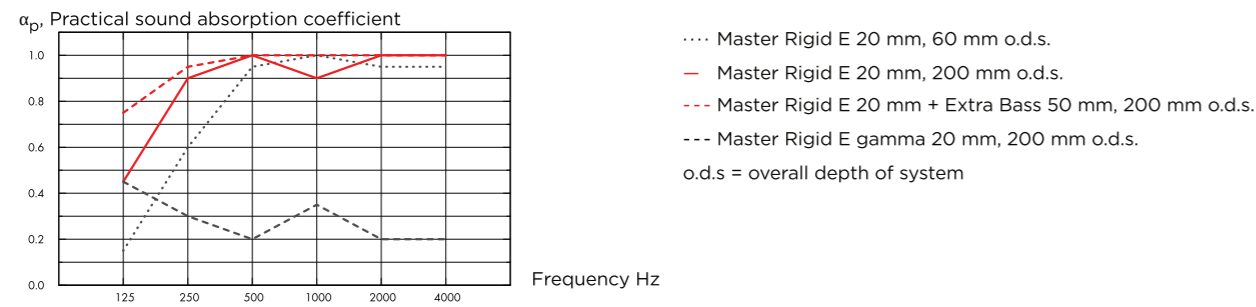

	THK mm	o.d.s. mm	$\alpha_p$ , Practical sound absorption coefficient						$\alpha_w$	Sound absorption class
			125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz		
-	20	60	0.15	0.60	0.95	1.00	0.95	0.95	0.90	A
-	20	200	0.45	0.90	1.00	0.90	1.00	1.00	1.00	A
+ Extra Bass	70	200	0.75	0.95	1.00	1.00	1.00	1.00	1.00	A
gamma	20	200	0.45	0.30	0.20	0.35	0.20	0.20	0.25	E

**SYSTEM WEIGHT:** Weight information is indicative and subject to variation. Master Rigid E: 1,6, Master Rigid E + Connect grid system: 2,6,

**MECHANICAL PROPERTIES:** See table regarding the min- and max- load bearing capacities and functional demands.


**IMPACT RESISTANCE:** Tested and classified according to EN 13964 annex D. M317: 3A,

**CE:** Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.

## INSTALLATION DIAGRAM IN DETAIL WWW.ECOPHON.COM

### M317EB

Installation diagram (M317EB) for Ecophon Master Rigid E

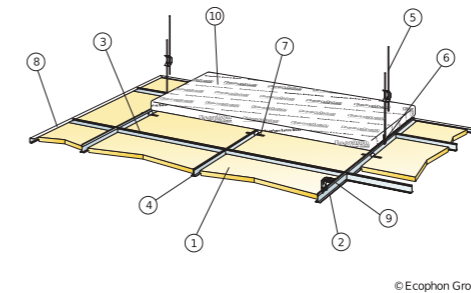

## INDOOR AIR QUALITY:

### Certificate / Label

Eurofins Indoor Air Comfort\* IAC Gold  
French VOC A+

**CARBON FOOTPRINT:** Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO <sub>2</sub> equiv/m <sup>2</sup>
Master Rigid E	3,27

**CIRCULARITY:** Minimum post-consumer recycled content: 45%, Recyclability: Fully recyclable,

**FIRE SAFETY:** The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. Europe: EN 13501-1, A2-s1,d0,

**HUMIDITY RESISTANCE:** Class C, relative humidity 95% and 30°C, according to EN 13964:2014


**VISUAL APPEARANCE:** White Frost, nearest NCS colour sample S 0500-N, 85% light reflectance. Gloss < 1.

**CLEANABILITY:** Daily dusting and vacuum cleaning. Weekly wet wiping.

**ACCESSIBILITY:** The tiles are secured in the grid, but demountable. Minimum demounting depth according to installation diagrams.

**INSTALLATION:** Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification.

**PACKAGING INFORMATION:** Information is indicative and subject to change. 600x600x20: E, 20, 7.20, 1200x600x20: E, 10, 7.20,




# Ecophon Master™ Rigid Dp

## ACOUSTICS:

### Sound Absorption:

Test results according to EN ISO 354. Classification according to EN ISO 11654.

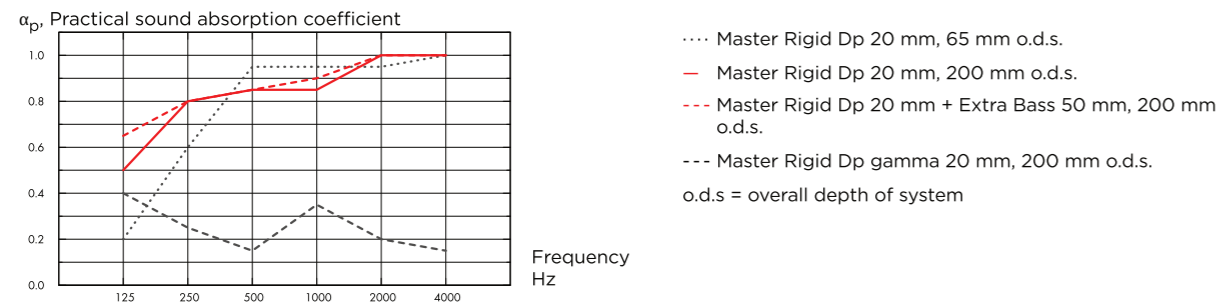

	THK mm	o.d.s. mm	$\alpha_p$ , Practical sound absorption coefficient					$\alpha_w$	Sound absorption class	
			125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz			4000 Hz
-	20	65	0.20	0.60	0.95	0.95	0.95	1.00	0.90	A
-	20	200	0.50	0.80	0.85	0.85	1.00	1.00	0.90	A
+ Extra Bass	70	200	0.65	0.80	0.85	0.90	1.00	1.00	0.90	A
gamma	20	200	0.40	0.25	0.15	0.35	0.20	0.15	0.20	E

## INDOOR AIR QUALITY:

### Certificate / Label

Eurofins Indoor Air Comfort\* IAC Gold  
French VOC A+

**CARBON FOOTPRINT:** Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

	kg CO <sub>2</sub> equiv/m <sup>2</sup>
Master Rigid Dp	4,95
Extra Bass	1,62

**CIRCULARITY:** Minimum post-consumer recycled content: 55%, Recyclability: Fully recyclable,

**FIRE SAFETY:** The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182. Europe: EN 13501-1, A2-s1,d0,

**HUMIDITY RESISTANCE:** Class C, relative humidity 95% and 30°C, according to EN 13964:2014

**VISUAL APPEARANCE:** White Frost, nearest NCS colour sample S 0500-N, 85% light reflectance. Gloss < 1.

**CLEANABILITY:** Daily dusting and vacuum cleaning. Weekly wet wiping.

**ACCESSIBILITY:** The tiles are secured in the grid, but demountable. Minimum demounting depth according to installation diagrams.

**INSTALLATION:** Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification.

**PACKAGING INFORMATION:** Information is indicative and subject to change. 600x600x20: Dp, 20, 7.20, 1200x600x20: Dp, 10, 7.20,

**SYSTEM WEIGHT:** Weight information is indicative and subject to variation. Master Rigid Dp: 2,5, Master Rigid Dp + Connect grid system: 3,5,


**MECHANICAL PROPERTIES:** See table regarding the min- and max- load bearing capacities and functional demands.

**IMPACT RESISTANCE:** Tested and classified according to EN 13964 annex D. M318: 3A,


**CE:** Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.


## INSTALLATION DIAGRAM IN DETAIL WWW.ECOPHON.COM

**M318EB**  
Installation diagram (M318EB) for Ecophon Master Rigid Dp

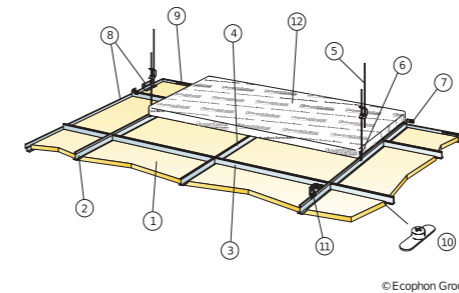

**M319**  
Installation diagram (M319) for Ecophon Master Rigid Dp in corridors

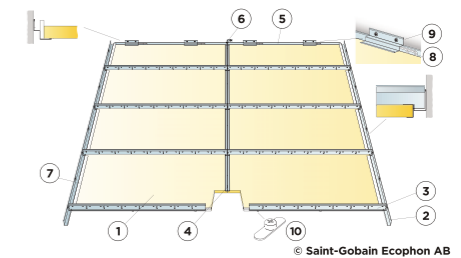



# Ecophon Square 43™

## LIGHTING PERFORMANCE:

System effect: 27 W Light source: LED 24,5 W Luminous flux Square Dg, Ds, E: 3281 lm Luminous flux Square Eg, Ez: 2898 lm Light efficiency Square Dg, Ds, E: 121,4 lm/W Light efficiency Square Dg, Ds, E: 108 lm/W Colour temperature: 4000K Color rendering index: Ra  $\geq$ 80 Colour tolerance: MacAdam  $\leq$ 3 SDCM Light output ratio (LOR): 100% Light distribution up/down: 0/100 Expected lifespan: L90  $>$ 50 000 h Expected lifespan: L70  $>$ 100 000 h

**CONNECTION:** The standard on/off electronic HF ballast delivered with 2,5 meters of cable 3x0,75 mm<sup>2</sup> and Euro plug. The SwitchDIM/DALI delivered without cable.

**ELECTRICAL DATA:** 220-240 V, 50-60 Hz, power factor  $\cos \varphi >$ 0,98. Electronic HF ballast or electronic HF dim ballast for digital regulation. Light source: led module of 27W total.

**ELECTRICAL APPROVALS:** IP20, Class 1.

**VISUAL APPEARANCE:** Tile surface finish; White Frost, nearest NCS colour sample S 0500-N, 85% light reflectance. Gloss  $<$  1.


**CLEANABILITY:** Daily dusting and vacuum cleaning. Weekly wet wiping.

**ACCESSIBILITY:** The tiles are easily demountable. Minimum demounting depth according to installation diagrams.



**INSTALLATION:** Installed according to system range which include information regarding minimum overall depth of system. The tile with luminaire housing rests on the T-profiles and the SwitchDIM/DALI and standard on/off ballasts are fastened to the grid or tile next to the luminaire with velcro. Once the tile with luminaire and ballast are in place a certified installation electrician must connect the wiring to sockets or to the next luminaire.


## INSTALLATION DIAGRAM IN DETAIL [WWW.ECOPHON.COM](http://WWW.ECOPHON.COM)

**M516**  
Installation diagram (M516) for Ecophon Dot LED Ds

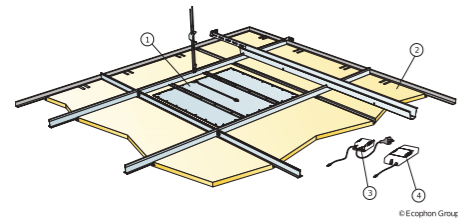

**M518**  
Installation diagram (M518) for Ecophon Dot LED Dg, E, Eg and Ez

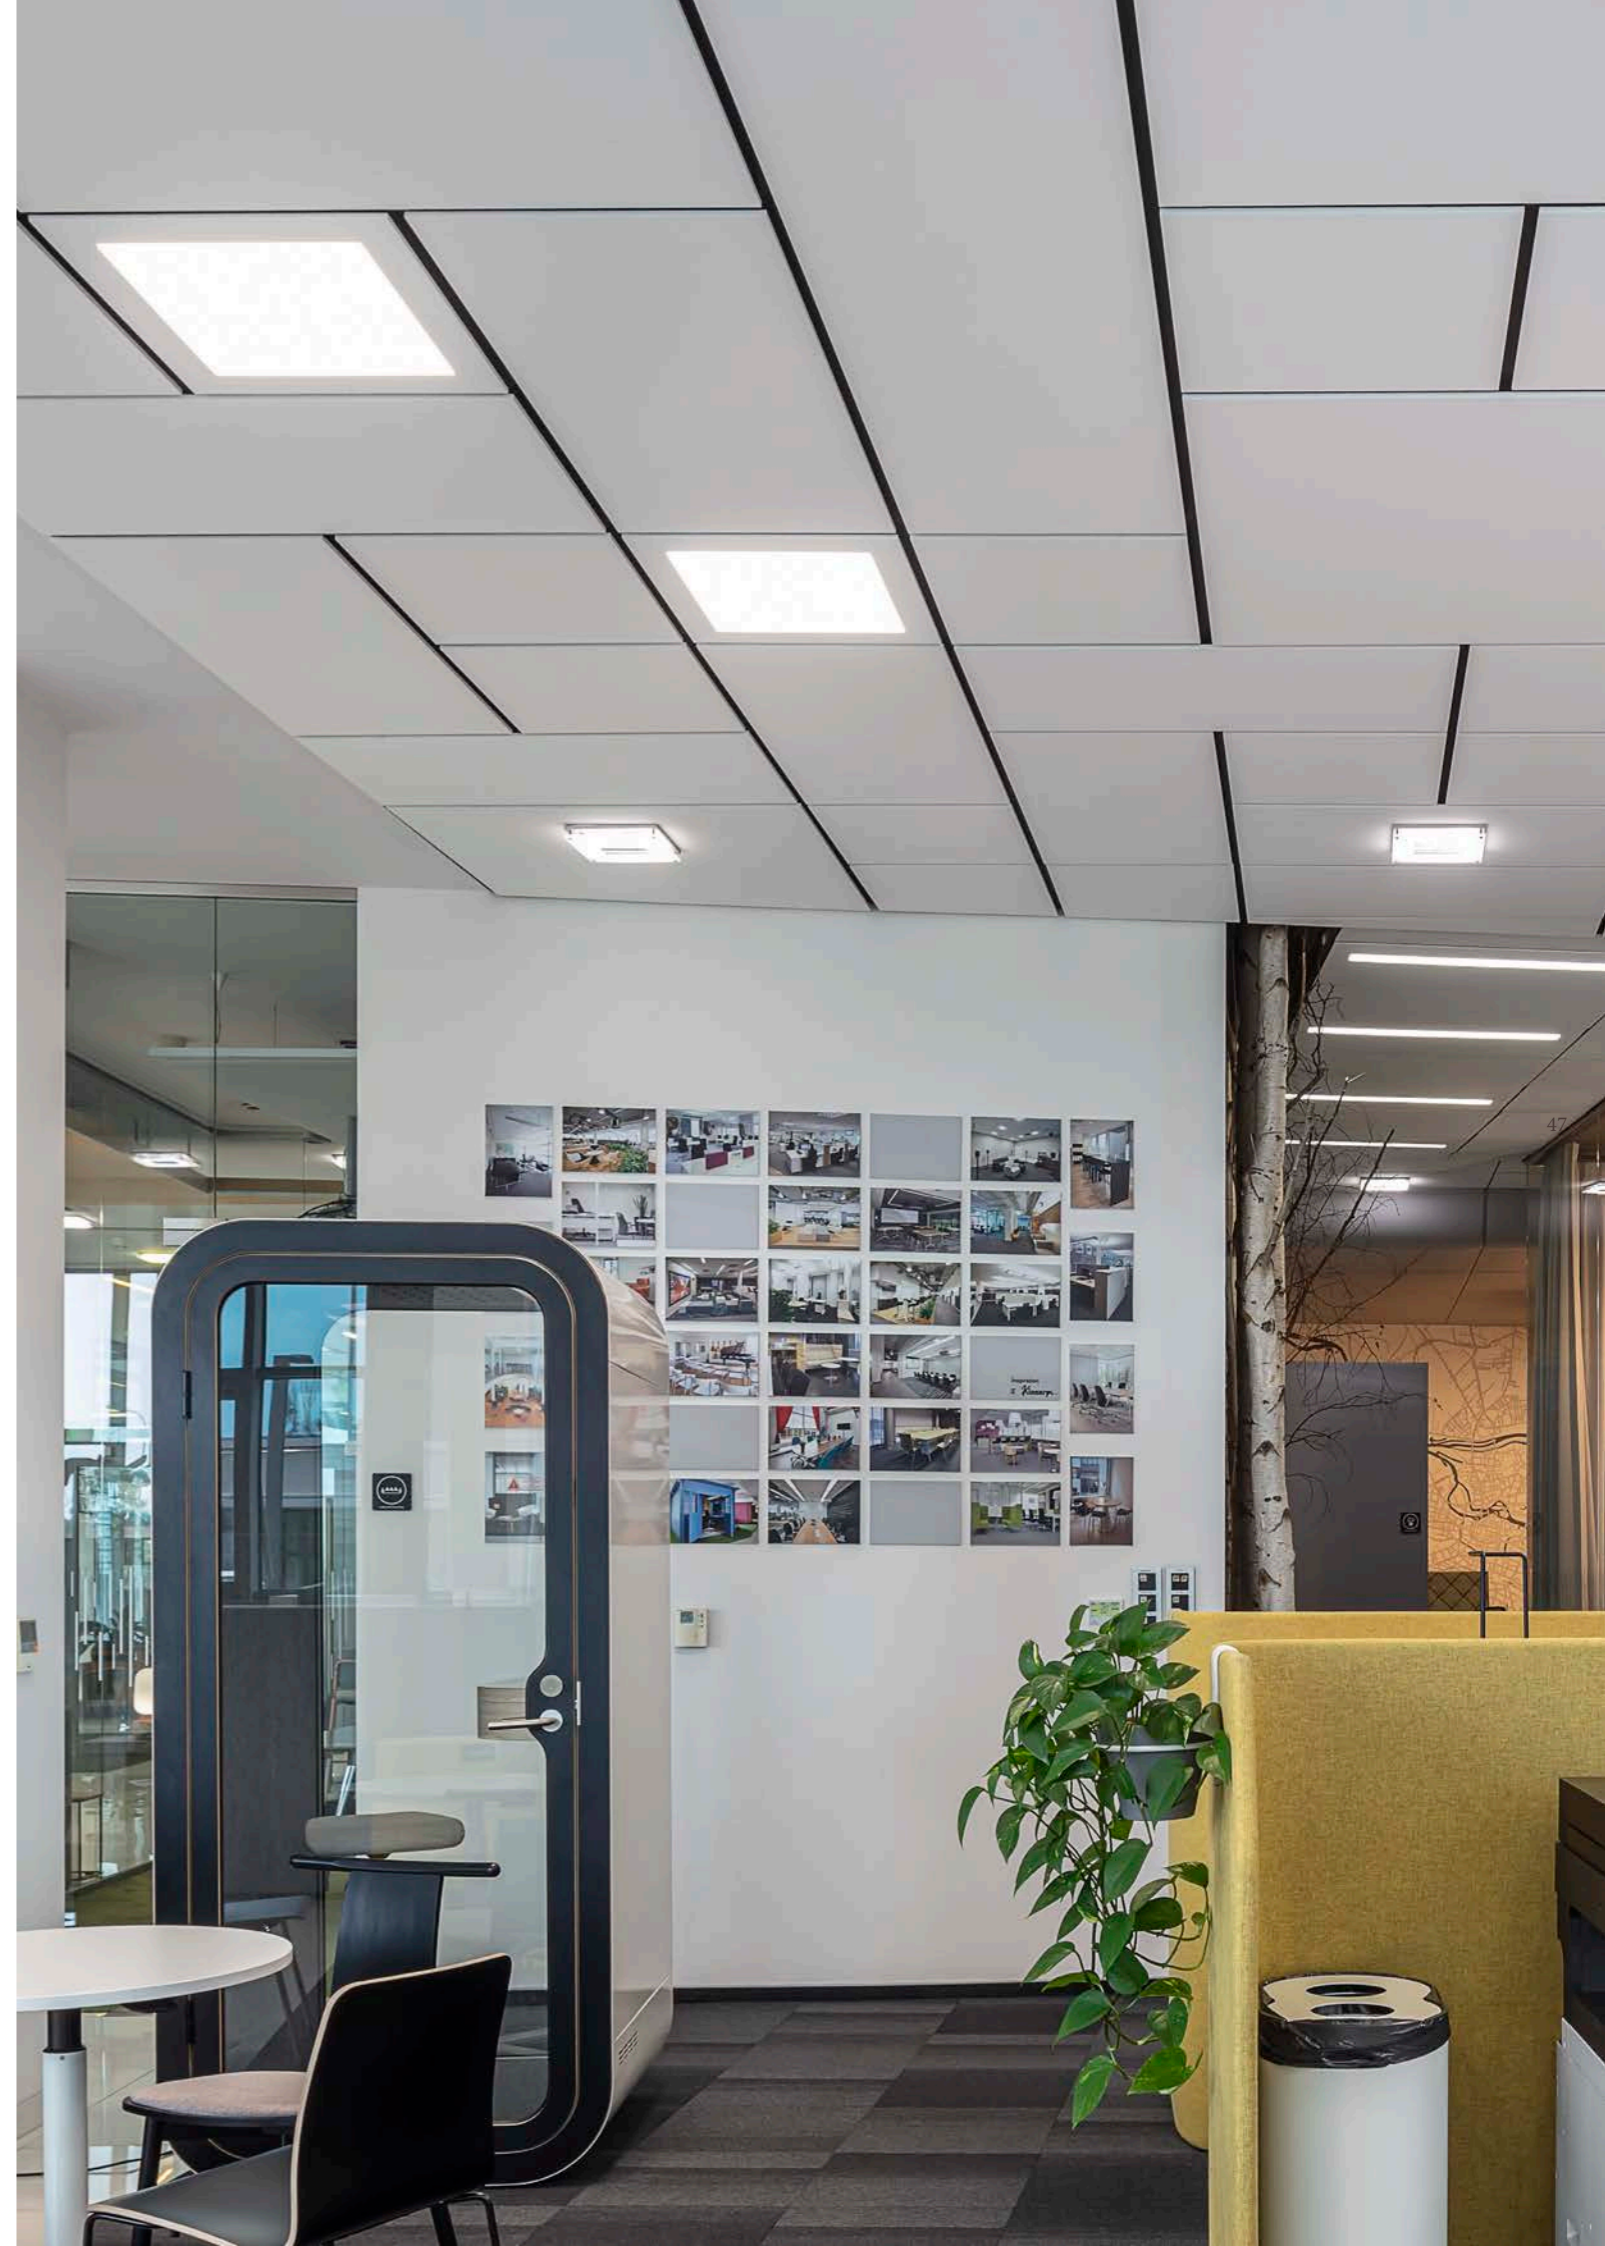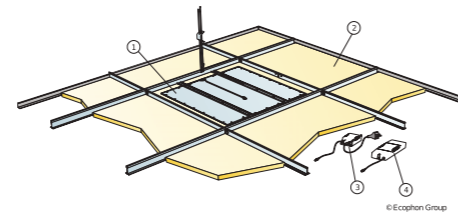



# Ecophon Dot™

## LIGHTING PERFORMANCE:

System effect Dot: 27 W  
 Light source: LED 24,5 W  
 Luminous flux Dot Dg, Ds, E: 2936 lm  
 Luminous flux Dot Eg, Ez: 2635 lm  
 Light efficiency Dot Dg, Ds, E: 108,7 lm/W  
 Light efficiency Dot Eg, Ez: 99 lm/W  
 Colour temperature: 4000K  
 Color rendering index: Ra ≥80  
 Colour tolerance: MacAdam ≤3 SDCM  
 Light output ratio (LOR): 100%  
 Light distribution up/down: 0/100  
 Expected lifespan: L90 >50 000 h  
 Expected lifespan: L70 >100 000 h

**CONNECTION:** The standard on/off electronic HF ballast delivered with 2,5 meters of cable 3x0,75 mm<sup>2</sup> and Euro plugg. The SwitchDIM/DALI delivered without cable.

**ELECTRICAL DATA:** 220-240 V, 50-60 Hz, power factor cos φ>0,98. Electronic HF ballast or electronic HF dim ballast for digital regulation. Light source: led module of 27W total.

**ELECTRICAL APPROVALS:** IP20, Class 1.

**VISUAL APPEARANCE:** Tile surface finish; White Frost, nearest NCS colour sample S 0500-N, 85% light reflectance. Gloss < 1.


**CLEANABILITY:** Daily dusting and vacuum cleaning. Weekly wet wiping.

**ACCESSIBILITY:** The tiles are easily demountable. Minimum demounting depth according to installation diagrams.


**INSTALLATION:** Installed according to system range which include information regarding minimum overall depth of system. The tile with luminaire housing rests on the T-profiles and the SwitchDIM/DALI and standard on/off ballasts are fastened to the grid or tile next to the luminaire with velcro. Once the tile with luminaire and ballast are in place a certified installation electrician must connect the wiring to sockets or to the next luminaire.


## INSTALLATION DIAGRAM IN DETAIL [WWW.ECOPHON.COM](http://WWW.ECOPHON.COM)

**M516**  
Installation diagram (M516) for Ecophon Dot LED Ds

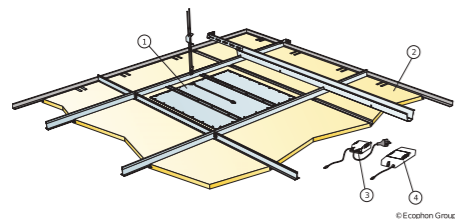

**M518**  
Installation diagram (M518) for Ecophon Dot LED Dg, E, Eg and Ez

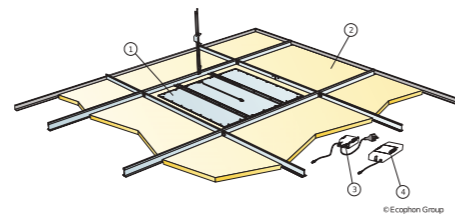

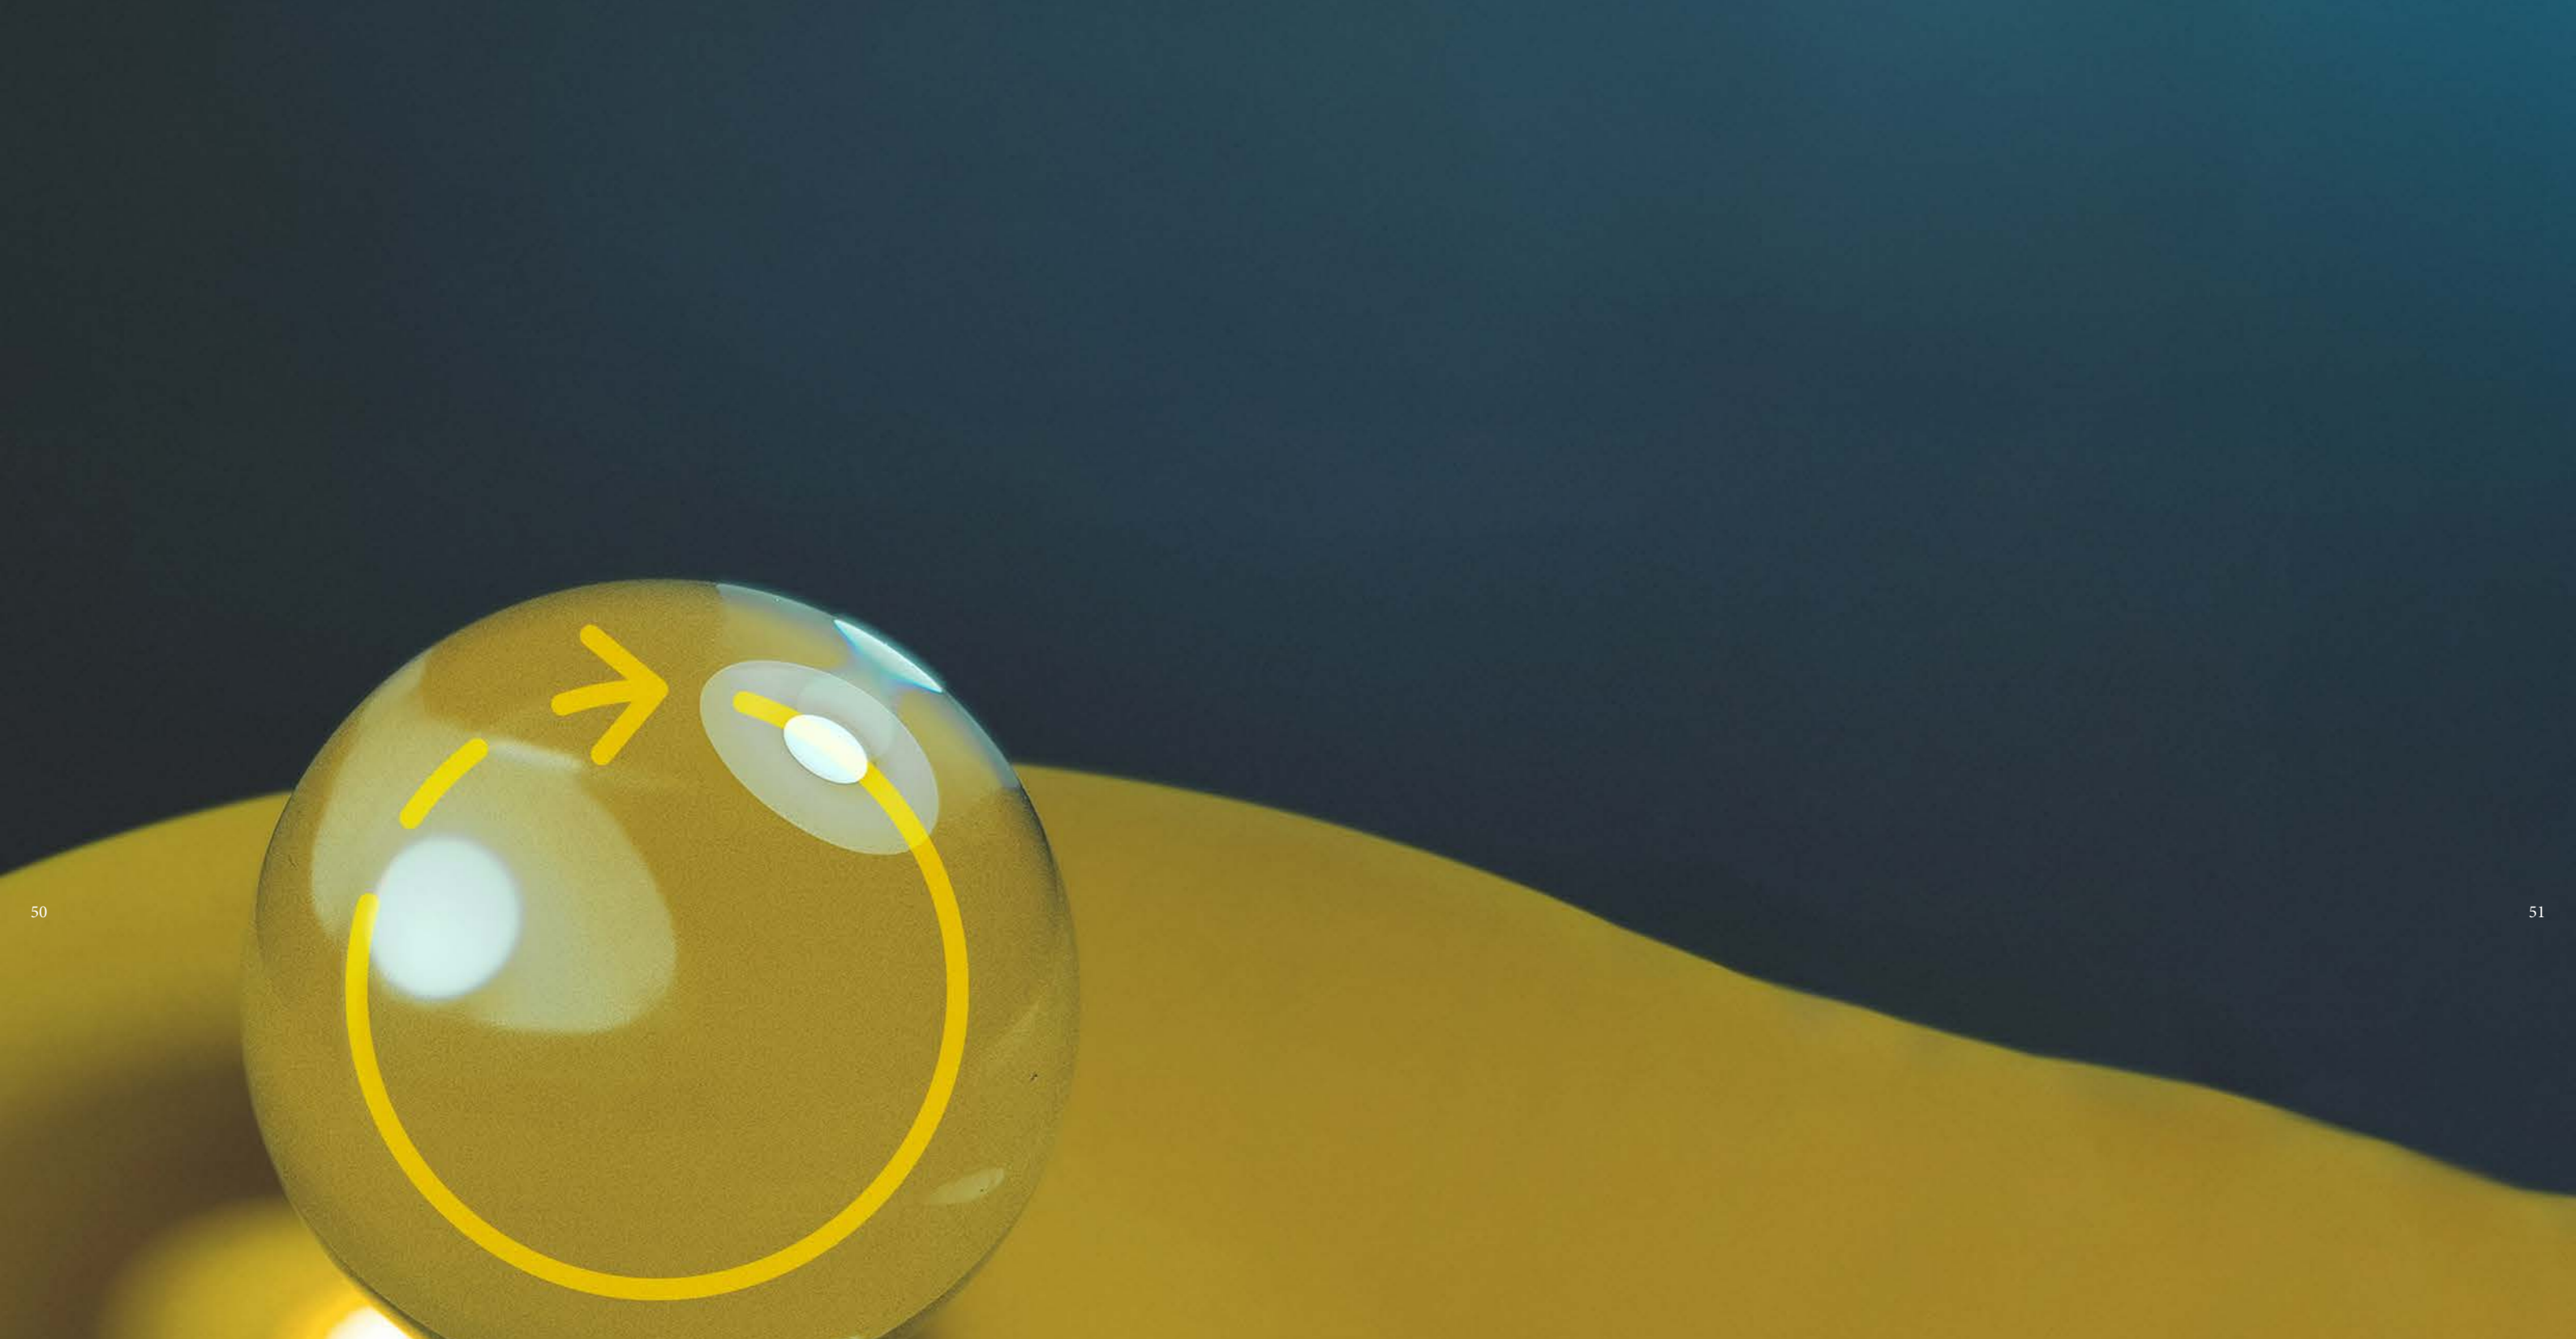

# Sustainability

## Towards net-zero acoustics

Sustainability is more than a word – it’s a collective movement to protect people and the planet that requires honest commitment and genuine care. That’s why Ecophon is building on better materials, transparency, and principles, to name just a few.

We actively support an industry-wide drive to standardised, easy-access Environmental Product Declarations for individual products, rather than product families. Their inclusion of full lifecycle data,

from raw material sourcing to end of life, rather than only the favourable stages. A move away from self-declared labels, or non-independently verified sustainability claims.

And for any promises of net zero carbon emission targets to be validated by the Science-Based Targets initiative.

If we’re going to build a sustainable future, it has to start with an honest approach, high ambition and the best of intentions – to build on better together.

Ecophon is the leading supplier of indoor acoustic solutions that improve working performance and quality of life. We believe in the difference sound can make to our everyday lives, and are passionate advocates for the importance of room acoustics to people's wellbeing – whatever the space, activity or need.

Having a sound effect on people is the principle that guides all we do. We're proud of the Swedish heritage and human approach that promise is founded on. Our uncompromising commitment to transparent sustainable practice. And, as members of the Saint-Gobain Group, to be doing our part in making the world a better home.



**Saint-Gobain Ecophon AB**  
Box 500, SE-265 03 Hyllinge, Sweden  
Phone: +46 (0)42 17 99 00  
Fax: +46 (0)42 22 55 55  
[www.ecophon.com](http://www.ecophon.com)

SE556142516501 • Based in Åstorp

